



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

**SPECfp®2006 = 95.1**

Lenovo System x3250 M6  
(3.00 GHz, Intel Xeon E3-1220 v6)

**SPECfp\_base2006 = 93.6**

CPU2006 license: 9017


Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

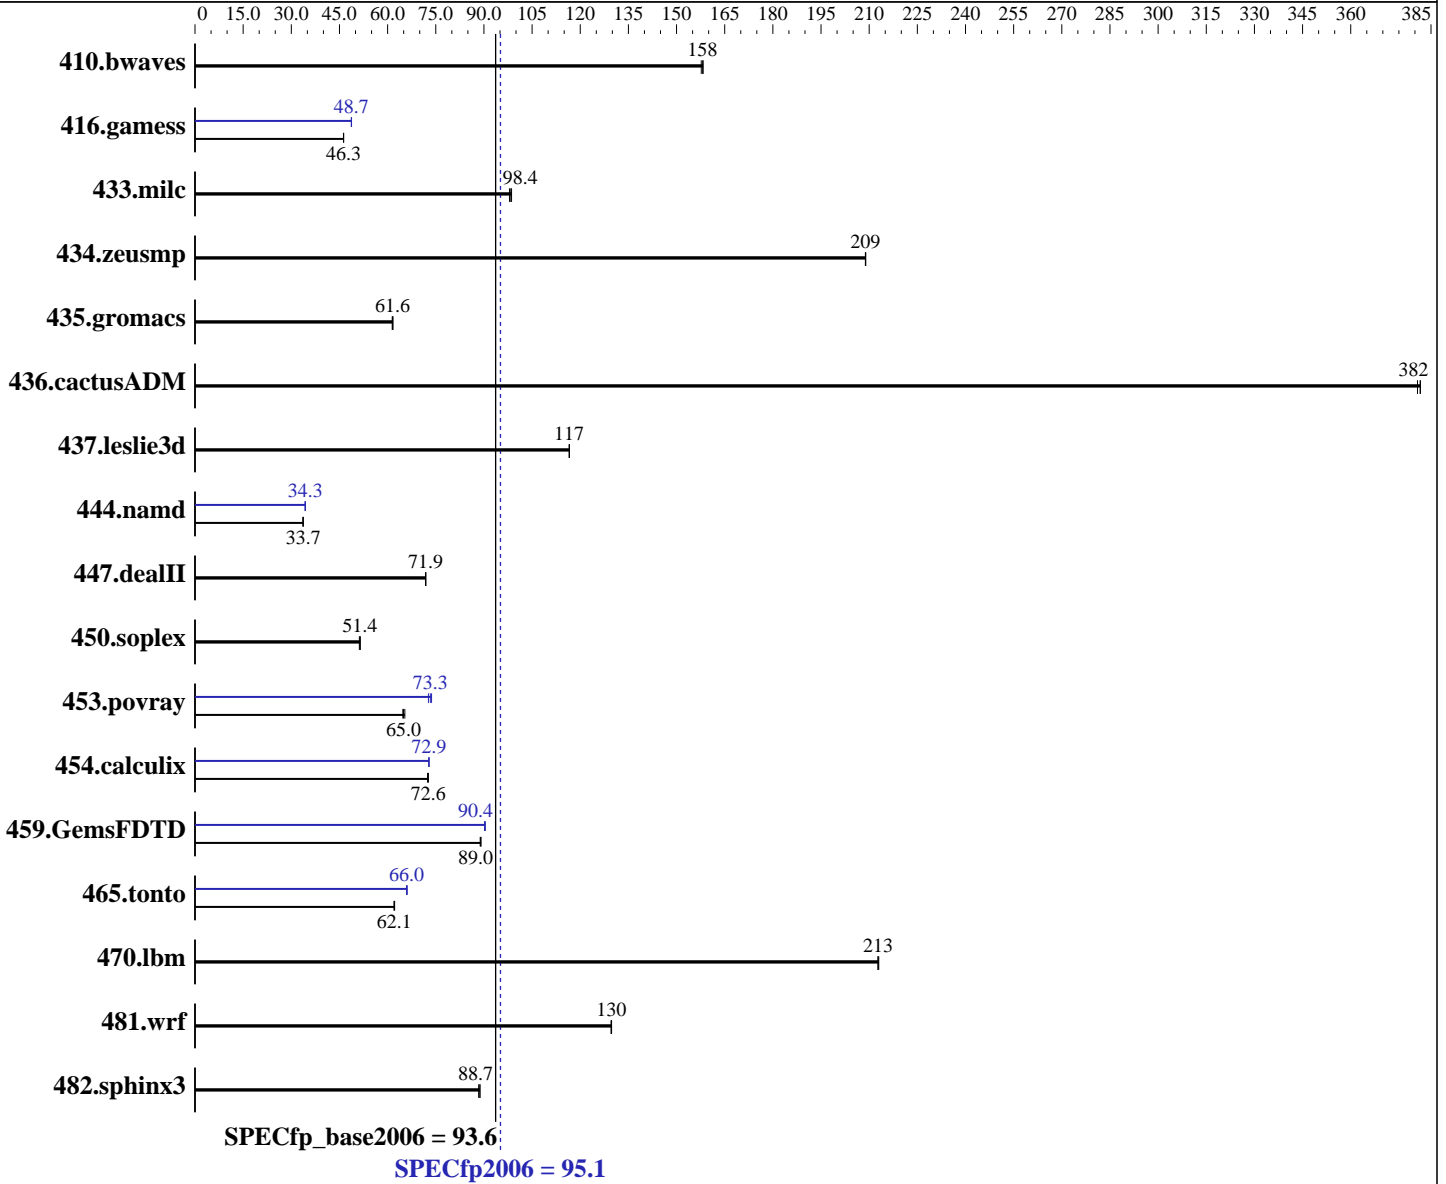

### Hardware

CPU Name: Intel Xeon E3-1220 v6  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 Kernel 3.10.0-514.el7.x86\_64  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECfp2006 = **95.1**

Lenovo System x3250 M6  
(3.00 GHz, Intel Xeon E3-1220 v6)

SPECfp\_base2006 = **93.6**

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-U)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	85.9	158	<b>85.9</b>	<b>158</b>	86.2	158	85.9	158	<b>85.9</b>	<b>158</b>	86.2	158
416.gamess	423	46.3	423	46.2	<b>423</b>	<b>46.3</b>	402	48.7	<b>402</b>	<b>48.7</b>	402	48.8
433.milc	<b>93.3</b>	<b>98.4</b>	93.7	98.0	93.1	98.6	<b>93.3</b>	<b>98.4</b>	93.7	98.0	93.1	98.6
434.zeusmp	<b>43.6</b>	<b>209</b>	43.6	209	43.6	209	<b>43.6</b>	<b>209</b>	43.6	209	43.6	209
435.gromacs	<b>116</b>	<b>61.6</b>	116	61.7	116	61.4	<b>116</b>	<b>61.6</b>	116	61.7	116	61.4
436.cactusADM	31.3	382	31.4	381	<b>31.3</b>	<b>382</b>	31.3	382	31.4	381	<b>31.3</b>	<b>382</b>
437.leslie3d	80.6	117	<b>80.6</b>	<b>117</b>	80.6	117	80.6	117	<b>80.6</b>	<b>117</b>	80.6	117
444.namd	<b>238</b>	<b>33.7</b>	238	33.7	239	33.6	234	34.3	234	34.3	<b>234</b>	<b>34.3</b>
447.dealII	159	71.8	<b>159</b>	<b>71.9</b>	159	71.9	159	71.8	<b>159</b>	<b>71.9</b>	159	71.9
450.soplex	163	51.2	162	51.4	<b>162</b>	<b>51.4</b>	163	51.2	162	51.4	<b>162</b>	<b>51.4</b>
453.povray	81.4	65.4	<b>81.9</b>	<b>65.0</b>	82.2	64.7	73.2	72.7	<b>72.6</b>	<b>73.3</b>	72.2	73.7
454.calculix	114	72.4	<b>114</b>	<b>72.6</b>	114	72.7	<b>113</b>	<b>72.9</b>	113	72.9	113	72.8
459.GemsFDTD	<b>119</b>	<b>89.0</b>	119	89.0	119	88.8	117	90.4	<b>117</b>	<b>90.4</b>	118	90.2
465.tonto	158	62.2	159	62.0	<b>159</b>	<b>62.1</b>	<b>149</b>	<b>66.0</b>	149	66.1	149	65.9
470.lbm	64.5	213	64.6	213	<b>64.6</b>	<b>213</b>	64.5	213	64.6	213	<b>64.6</b>	<b>213</b>
481.wrf	<b>86.1</b>	<b>130</b>	86.1	130	86.2	130	<b>86.1</b>	<b>130</b>	86.1	130	86.2	130
482.sphinx3	<b>220</b>	<b>88.7</b>	220	88.8	221	88.3	<b>220</b>	<b>88.7</b>	220	88.8	221	88.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Intel Virtualization Technology set to Disable

Operating Mode set to Maximum Performance

Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on miaoli-01-rhel7.3 Fri Aug 4 19:41:39 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

**SPECfp2006 = 95.1**

Lenovo System x3250 M6  
(3.00 GHz, Intel Xeon E3-1220 v6)

**SPECfp\_base2006 = 93.6**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2017

### Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1220 v6 @ 3.00GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
 cache size : 8192 KB

```

```

From /proc/meminfo
MemTotal:      65932404 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

```

```

uname -a:
Linux miaoli-01-rhel7.3 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT
2016 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Aug 4 11:35

```

SPEC is set to: /home/cpu2006-1.2-ic17.0u3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   689G  5.1G  684G   1% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO -[M3E123AUS-2.10]- 06/15/2017

Memory:

4x Samsung M378A2K43BB1-CRC 16 GB 2 rank 2400 MHz

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 95.1

Lenovo System x3250 M6  
(3.00 GHz, Intel Xeon E3-1220 v6)

SPECfp\_base2006 = 93.6

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages disabled with:

echo never > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 95.1

Lenovo System x3250 M6  
(3.00 GHz, Intel Xeon E3-1220 v6)

SPECfp\_base2006 = 93.6

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

## Peak Compiler Invocation

C benchmarks:  
icc -m64  
C++ benchmarks:  
icpc -m64  
Fortran benchmarks:  
ifort -m64  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
433.milc: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp2006 = 95.1

Lenovo System x3250 M6  
(3.00 GHz, Intel Xeon E3-1220 v6)

SPECfp\_base2006 = 93.6

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
-auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

Lenovo System x3250 M6  
(3.00 GHz, Intel Xeon E3-1220 v6)

**SPECfp2006 = 95.1**

**SPECfp\_base2006 = 93.6**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Aug-2017

**Hardware Availability:** Apr-2017

**Software Availability:** Apr-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-KBL-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-KBL-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Aug 23 13:37:54 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 August 2017.