



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECfp[®]2006 = 154

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECfp_base2006 = 148

CPU2006 license: 9066


Test date: Sep-2017

Test sponsor: H3C

Hardware Availability: Jul-2017

Tested by: H3C

Software Availability: Apr-2017

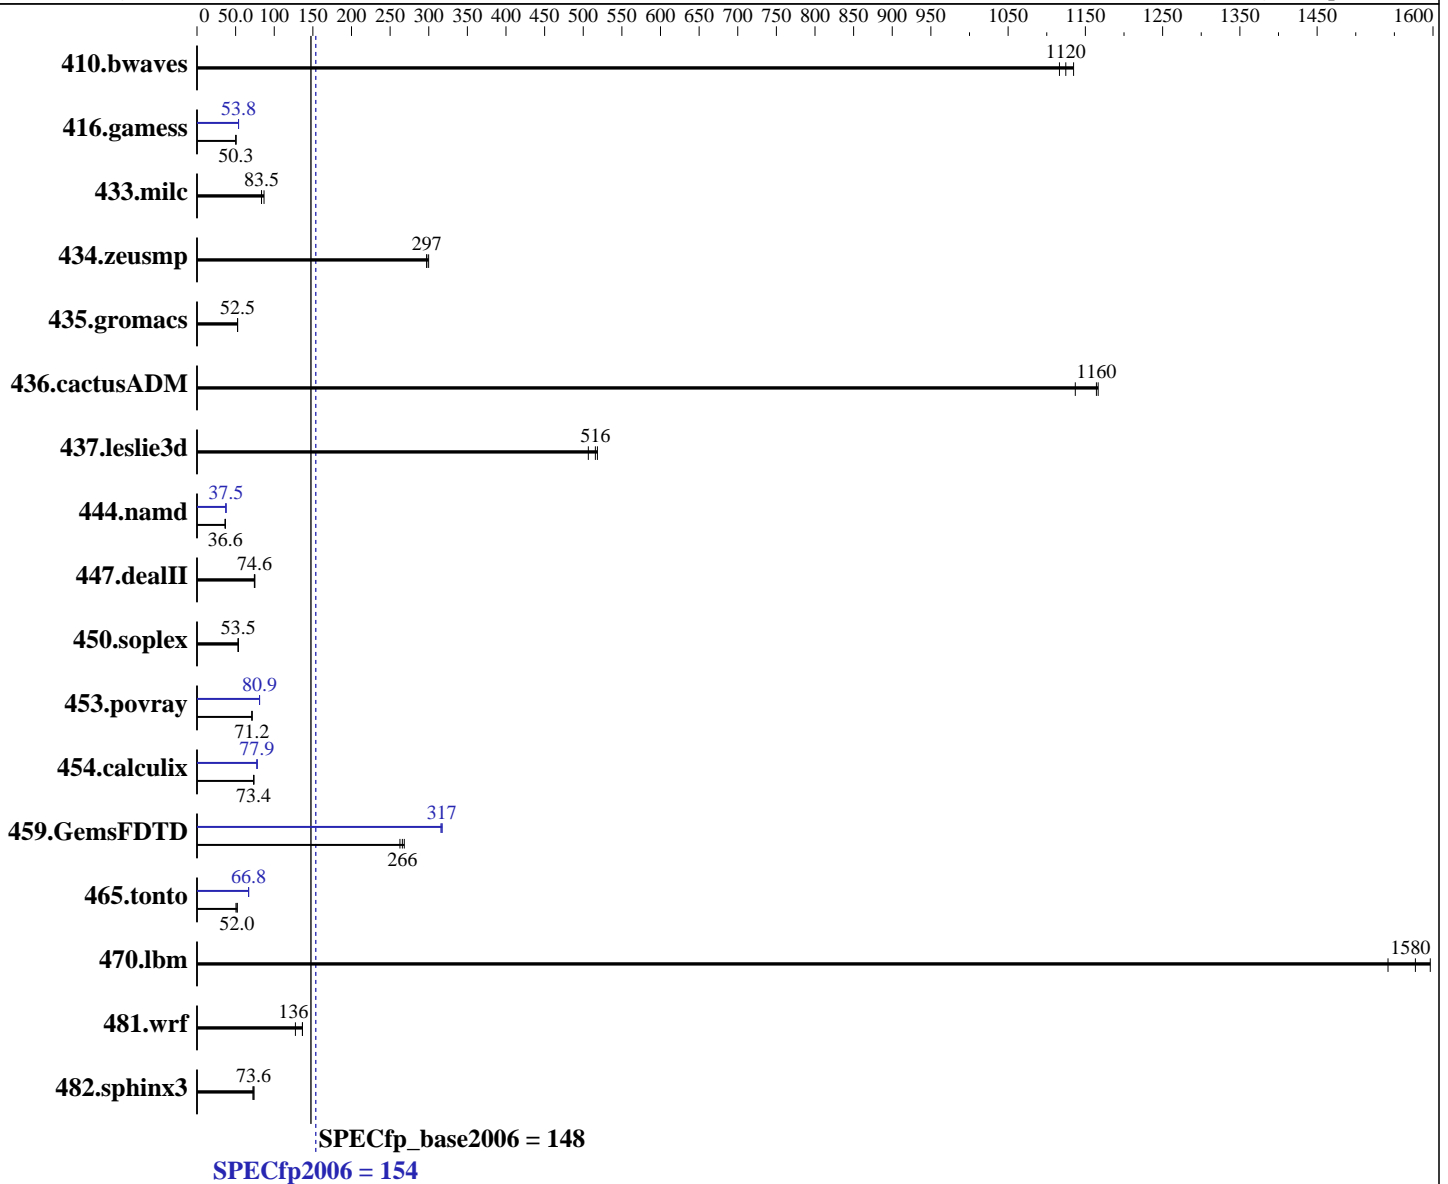

Hardware

CPU Name: Intel Xeon Platinum 8180
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 3.10.0-514.26.2.el7.x86_64
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECfp2006 = **154**

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECfp_base2006 = **148**

CPU2006 license: 9066

Test date: Sep-2017

Test sponsor: H3C

Hardware Availability: Jul-2017

Tested by: H3C

Software Availability: Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Disk Subsystem: 1 x 480 GB SATA SSD
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12.0	1130	<u>12.1</u>	<u>1120</u>	12.2	1120	12.0	1130	<u>12.1</u>	<u>1120</u>	12.2	1120
416.gamess	<u>389</u>	<u>50.3</u>	389	50.3	389	50.4	<u>364</u>	<u>53.8</u>	364	53.8	364	53.7
433.milc	<u>110</u>	<u>83.5</u>	106	86.8	110	83.5	<u>110</u>	<u>83.5</u>	106	86.8	110	83.5
434.zeusmp	30.3	300	<u>30.6</u>	<u>297</u>	30.6	297	30.3	300	<u>30.6</u>	<u>297</u>	30.6	297
435.gromacs	136	52.4	<u>136</u>	<u>52.5</u>	136	52.6	136	52.4	<u>136</u>	<u>52.5</u>	136	52.6
436.cactusADM	10.2	1170	<u>10.3</u>	<u>1160</u>	10.5	1140	10.2	1170	<u>10.3</u>	<u>1160</u>	10.5	1140
437.leslie3d	18.6	507	18.1	518	<u>18.2</u>	<u>516</u>	18.6	507	18.1	518	<u>18.2</u>	<u>516</u>
444.namd	<u>219</u>	<u>36.6</u>	219	36.6	219	36.6	214	37.5	214	37.5	<u>214</u>	<u>37.5</u>
447.dealII	<u>153</u>	<u>74.6</u>	154	74.2	153	74.8	<u>153</u>	<u>74.6</u>	154	74.2	153	74.8
450.soplex	157	53.1	<u>156</u>	<u>53.5</u>	155	53.6	157	53.1	<u>156</u>	<u>53.5</u>	155	53.6
453.povray	<u>74.7</u>	<u>71.2</u>	74.9	71.0	74.6	71.3	65.6	81.0	65.8	80.9	<u>65.7</u>	<u>80.9</u>
454.calculix	112	73.6	<u>112</u>	<u>73.4</u>	113	73.3	<u>106</u>	<u>77.9</u>	107	77.5	106	77.9
459.GemsFDTD	39.5	268	<u>39.9</u>	<u>266</u>	40.4	263	33.6	316	33.4	317	<u>33.5</u>	<u>317</u>
465.tonto	189	52.0	<u>189</u>	<u>52.0</u>	195	50.4	147	66.8	<u>147</u>	<u>66.8</u>	147	66.8
470.lbm	8.91	1540	<u>8.71</u>	<u>1580</u>	8.61	1600	8.91	1540	<u>8.71</u>	<u>1580</u>	8.61	1600
481.wrf	<u>81.8</u>	<u>136</u>	87.7	127	81.8	136	<u>81.8</u>	<u>136</u>	87.7	127	81.8	136
482.sphinx3	269	72.4	<u>265</u>	<u>73.6</u>	265	73.6	269	72.4	<u>265</u>	<u>73.6</u>	265	73.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Set SNC to Disabled
 Set Hyper-Threading to disabled
 Set Patrol Scrub to disabled
 Set C1E to disabled
 Sysinfo program /home/spec/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on localhost.localdomain Sun Sep 3 08:10:07 2017

This section contains SUT (System Under Test) info as seen by
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECfp2006 = 154

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECfp_base2006 = 148

CPU2006 license: 9066

Test date: Sep-2017

Test sponsor: H3C

Hardware Availability: Jul-2017

Tested by: H3C

Software Availability: Apr-2017

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores     : 28
  siblings      : 28
  physical 0:   cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
                25 26 27 28 29 30
  physical 1:   cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
                25 26 27 28 29 30
cache size     : 39424 KB

```

From /proc/meminfo

```

MemTotal:      394654688 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

```

uname -a:

```

Linux localhost.localdomain 3.10.0-514.26.2.el7.x86_64 #1 SMP Tue Jul 4
15:04:05 UTC 2017 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Sep 2 03:22

SPEC is set to: /home/spec

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3        xfs       439G  42G  398G  10% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECfp2006 = 154

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECfp_base2006 = 148

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: Sep-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

Platform Notes (Continued)

BIOS American Megatrends Inc. 1.00.17 08/01/2017

Memory:

24x Micron 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/spec/lib/ia32:/home/spec/lib/intel64:/home/spec/sh10.2"

OMP_NUM_THREADS = "56"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECfp2006 = 154

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECfp_base2006 = 148

CPU2006 license: 9066

Test date: Sep-2017

Test sponsor: H3C

Hardware Availability: Jul-2017

Tested by: H3C

Software Availability: Apr-2017

Base Portability Flags (Continued)

```

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

```

Peak Compiler Invocation

```

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

```

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECfp2006 = 154

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECfp_base2006 = 148

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: Sep-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECfp2006 = 154

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECfp_base2006 = 148

CPU2006 license: 9066

Test date: Sep-2017

Test sponsor: H3C

Hardware Availability: Jul-2017

Tested by: H3C

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/H3C-Platform-Settings-SKL-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/H3C-Platform-Settings-SKL-V1.1.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 20 11:01:39 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 September 2017.