



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180M, 2.50 GHz)

SPECfp®2006 = 150

SPECfp_base2006 = 144

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

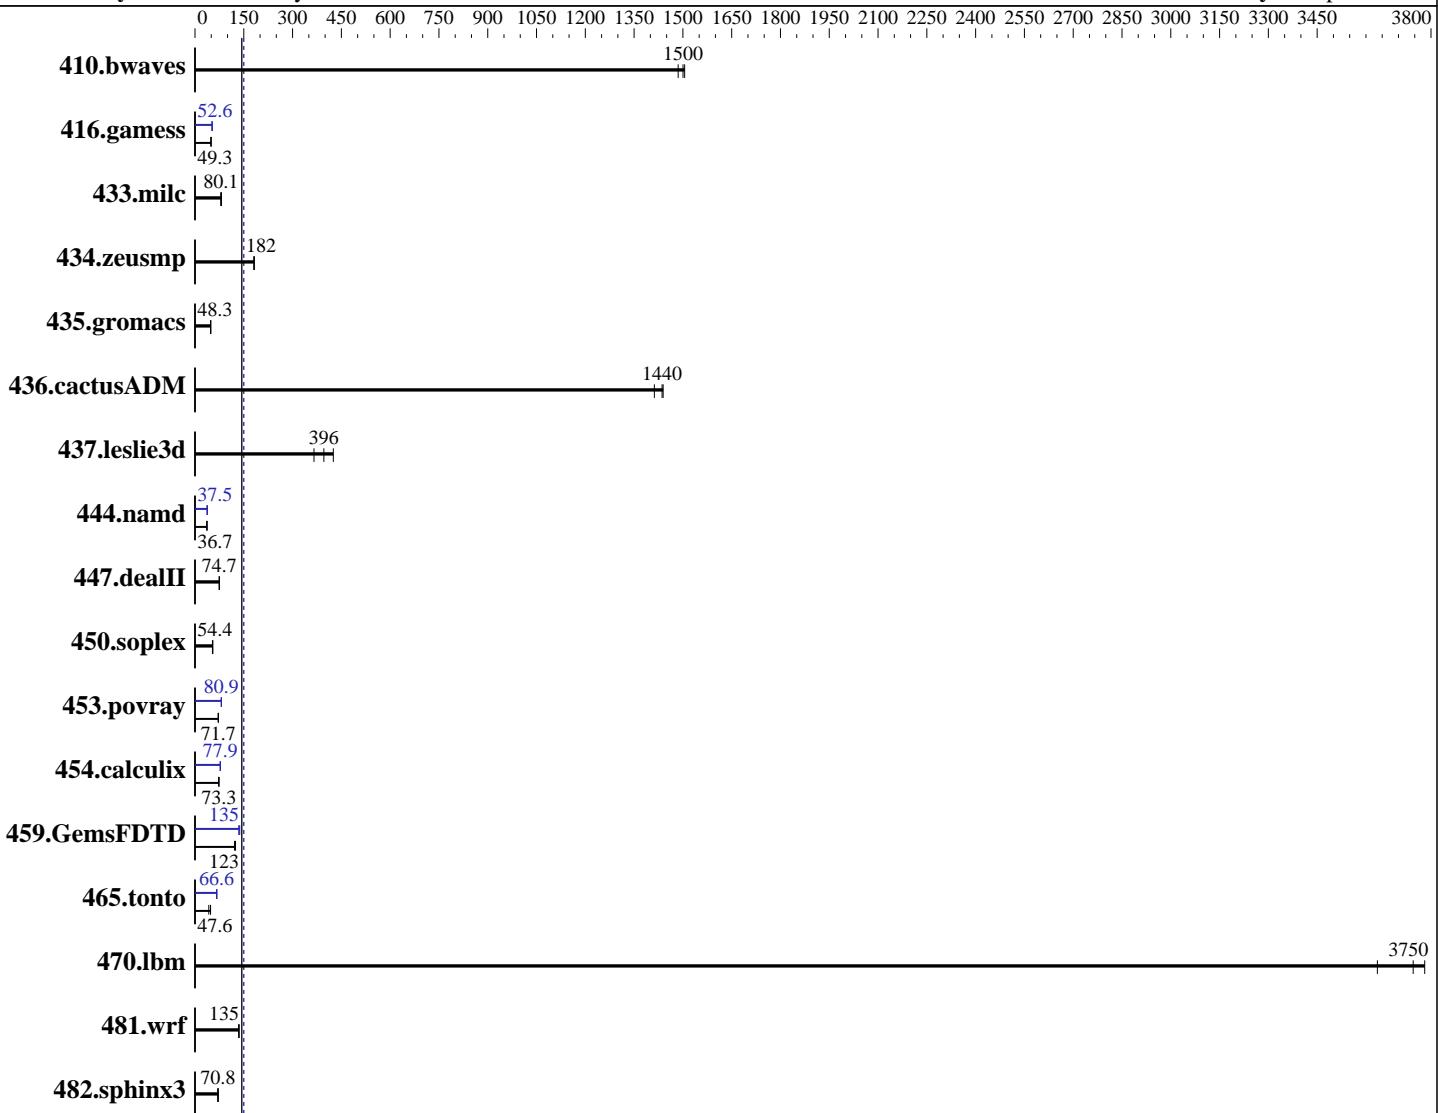

Hardware

CPU Name: Intel Xeon Platinum 8180M
CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz: 2500
FPU: Integrated
CPU(s) enabled: 112 cores, 4 chips, 28 cores/chip
CPU(s) orderable: 2,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64)
4.4.21-69-default
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 5 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180M, 2.50 GHz)

SPECfp2006 = 150

SPECfp_base2006 = 144

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

L3 Cache:	38.5 MB I+D on chip per chip
Other Cache:	None
Memory:	768 GB (48 x 16 GB 2Rx4 PC4-2666V-R)
Disk Subsystem:	1 x 1 TB SAS HDD, 7.2K RPM
Other Hardware:	None

Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	9.15	1490	9.06	1500	9.03	1510	9.15	1490	9.06	1500	9.03	1510
416.gamess	398	49.1	398	49.3	397	49.3	373	52.5	372	52.6	372	52.7
433.milc	115	80.1	115	79.5	113	81.4	115	80.1	115	79.5	113	81.4
434.zeusmp	50.0	182	50.0	182	50.2	181	50.0	182	50.0	182	50.2	181
435.gromacs	148	48.3	148	48.3	148	48.1	148	48.3	148	48.3	148	48.1
436.cactusADM	8.30	1440	8.46	1410	8.32	1440	8.30	1440	8.46	1410	8.32	1440
437.leslie3d	23.7	396	22.1	425	25.7	366	23.7	396	22.1	425	25.7	366
444.namd	219	36.7	219	36.7	219	36.7	214	37.6	214	37.5	214	37.5
447.dealII	153	74.7	153	74.8	153	74.7	153	74.7	153	74.8	153	74.7
450.soplex	153	54.5	153	54.4	155	53.7	153	54.5	153	54.4	155	53.7
453.povray	74.1	71.8	74.3	71.6	74.2	71.7	65.7	80.9	65.5	81.2	65.7	80.9
454.calculix	112	73.5	112	73.3	113	73.1	106	77.9	106	77.9	106	77.6
459.GemsFDTD	87.2	122	85.1	125	86.1	123	78.6	135	78.5	135	77.1	138
465.tonto	207	47.6	205	47.9	232	42.4	148	66.6	148	66.5	146	67.3
470.lbm	3.67	3750	3.78	3640	3.63	3780	3.67	3750	3.78	3640	3.63	3780
481.wrf	82.8	135	83.0	135	82.5	135	82.8	135	83.0	135	82.5	135
482.sphinx3	275	70.8	272	71.6	278	70.0	275	70.8	272	71.6	278	70.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Disabled

CPU performance set to Enterprise

Power Performance Tuning set to OS

SNC set to Disabled

IMC Interleaving set to Auto

Patrol Scrub set to Disabled

Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-g4f1 Sat Dec 9 22:23:28 2017

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180M, 2.50 GHz)

SPECfp2006 = 150

SPECfp_base2006 = 144

CPU2006 license: 9019

Test date: Dec-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8180M CPU @ 2.50GHz
        4 "physical id"s (chips)
        112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 28
    siblings : 28
    physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
cache size : 39424 KB
```

```
From /proc/meminfo
MemTotal:      790968340 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-g4f1 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180M, 2.50 GHz)

SPECfp2006 = 150

SPECfp_base2006 = 144

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

Platform Notes (Continued)

run-level 5 Jan 8 18:45

```
SPEC is set to: /home/cpu2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda6        xfs   871G  253G  618G  30%  /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Cisco Systems, Inc. C480M5.3.1.0.248.0518171057 05/18/2017
Memory:
 48x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"

OMP_NUM_THREADS = "112"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180M, 2.50 GHz)

SPECfp2006 = 150

SPECfp_base2006 = 144

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180M, 2.50 GHz)

SPECfp2006 = 150

SPECfp_base2006 = 144

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180M, 2.50 GHz)

SPECfp2006 = 150

SPECfp_base2006 = 144

CPU2006 license: 9019

Test date: Dec-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Dec 28 13:37:06 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 December 2017.