



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8176)

**SPECfp®2006 = 143**

**SPECfp\_base2006 = 135**

CPU2006 license: 9017


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Jul-2017

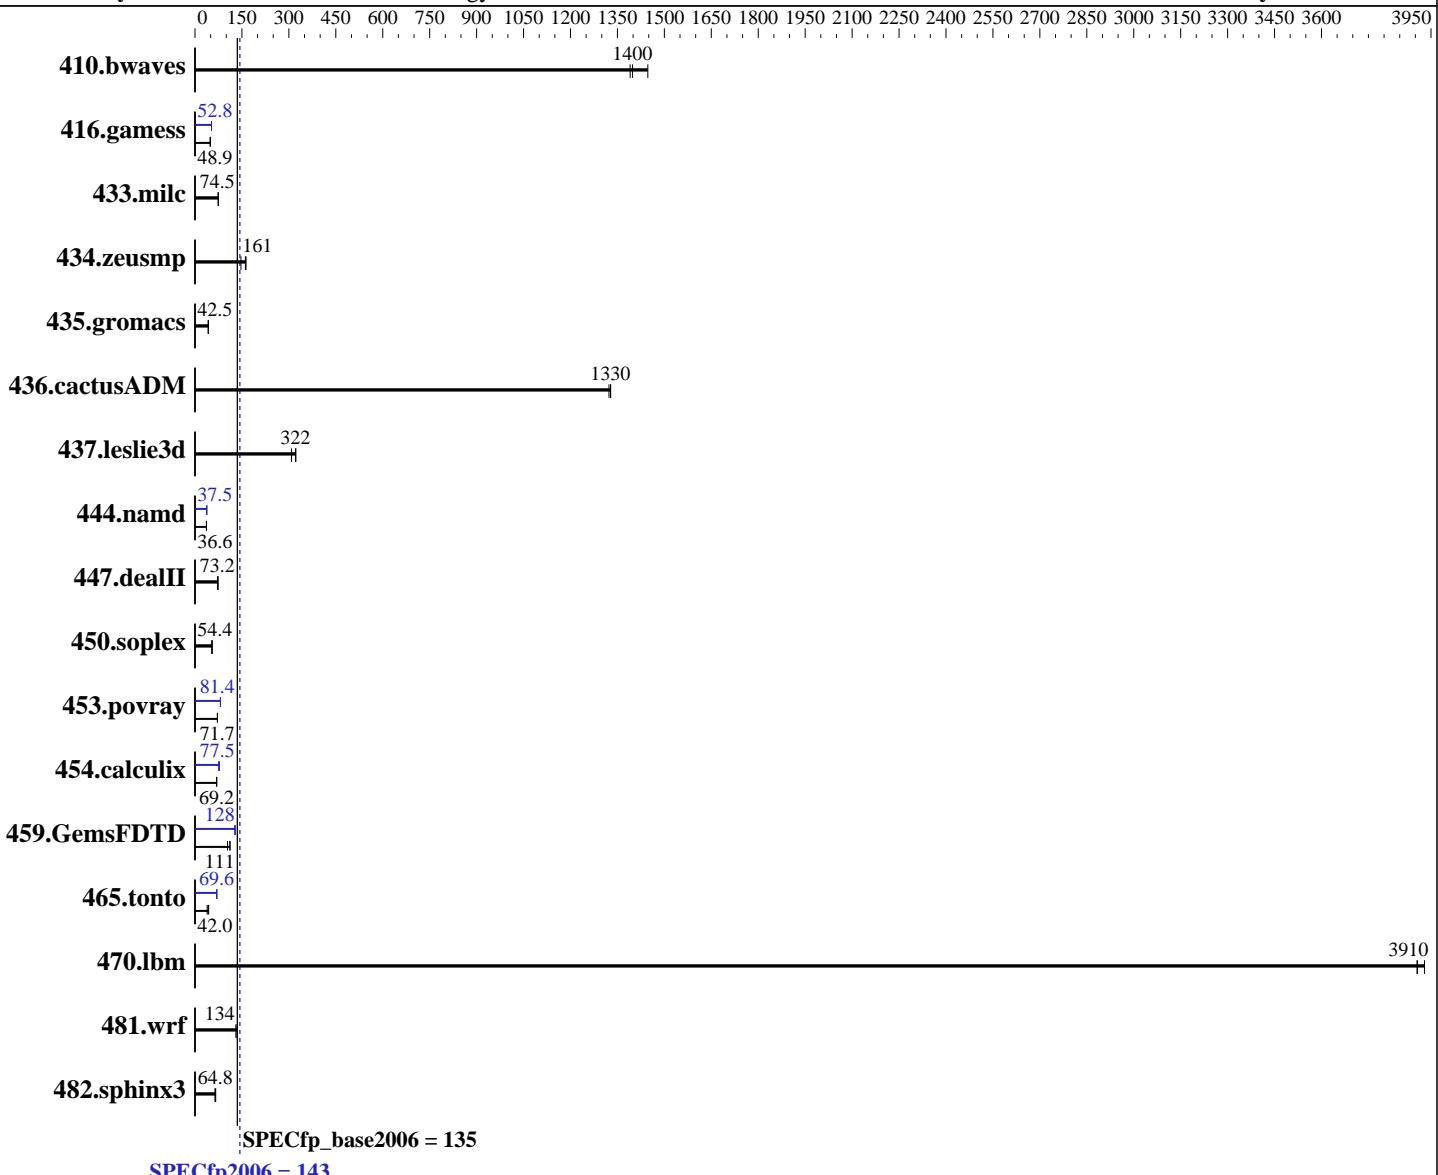

### Hardware

CPU Name: Intel Xeon Platinum 8176  
CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 112 cores, 4 chips, 28 cores/chip  
CPU(s) orderable: 2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
Compiler: Kernel 4.4.73-5-default  
C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8176)

**SPECfp2006 = 143**

**SPECfp\_base2006 = 135**

CPU2006 license: 9017

Test date: Dec-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Jul-2017

L3 Cache: 38.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
Disk Subsystem: 1 x 800 GB SAS SSD  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>9.72</b>	<b>1400</b>	9.77	1390	9.39	1450	<b>9.72</b>	<b>1400</b>	9.77	1390	9.39	1450
416.gamess	<b>400</b>	<b>48.9</b>	401	48.8	399	49.0	<b>371</b>	<b>52.8</b>	371	52.8	371	52.7
433.milc	124	74.1	<b>123</b>	<b>74.5</b>	123	74.8	<b>124</b>	<b>74.1</b>	<b>123</b>	<b>74.5</b>	123	74.8
434.zeusmp	<b>56.5</b>	<b>161</b>	55.8	163	62.0	147	<b>56.5</b>	<b>161</b>	55.8	163	62.0	147
435.gromacs	167	42.7	<b>168</b>	<b>42.5</b>	168	42.5	167	42.7	<b>168</b>	<b>42.5</b>	168	42.5
436.cactusADM	9.00	1330	9.03	1320	<b>9.00</b>	<b>1330</b>	9.00	1330	9.03	1320	<b>9.00</b>	<b>1330</b>
437.leslie3d	30.5	309	29.2	322	<b>29.2</b>	<b>322</b>	30.5	309	29.2	322	<b>29.2</b>	<b>322</b>
444.namd	219	36.6	<b>219</b>	<b>36.6</b>	219	36.6	214	37.5	<b>214</b>	<b>37.5</b>	214	37.5
447.dealII	<b>156</b>	<b>73.2</b>	158	72.5	156	73.3	<b>156</b>	<b>73.2</b>	158	72.5	156	73.3
450.soplex	153	54.6	<b>153</b>	<b>54.4</b>	154	54.2	<b>153</b>	<b>54.6</b>	<b>153</b>	<b>54.4</b>	154	54.2
453.povray	74.3	71.6	<b>74.2</b>	<b>71.7</b>	74.1	71.8	<b>65.3</b>	<b>81.4</b>	65.5	81.2	65.3	81.4
454.calculix	<b>119</b>	<b>69.2</b>	120	69.0	119	69.3	106	77.5	<b>106</b>	<b>77.5</b>	109	75.6
459.GemsFDTD	102	104	94.5	112	<b>95.4</b>	<b>111</b>	<b>82.9</b>	<b>128</b>	83.2	128	82.8	128
465.tonto	254	38.8	225	43.6	<b>234</b>	<b>42.0</b>	141	69.7	142	69.2	<b>141</b>	<b>69.6</b>
470.lbm	3.52	3910	3.50	3930	<b>3.52</b>	<b>3910</b>	3.52	3910	3.50	3930	<b>3.52</b>	<b>3910</b>
481.wrf	<b>83.3</b>	<b>134</b>	82.3	136	85.6	130	<b>83.3</b>	<b>134</b>	82.3	136	85.6	130
482.sphinx3	304	64.2	<b>301</b>	<b>64.8</b>	294	66.2	<b>304</b>	<b>64.2</b>	<b>301</b>	<b>64.8</b>	294	66.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Hyper-Threading set to Disable

Intel Virtualization Technology set to Disable

Adjacent Cache Prefetch set to Disable

DCA set to Enable

MONITORWAIT set to Enable

Snoop Preference set to home snoop

XPT Prefetcher set to Enable

Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8176)

SPECfp2006 =

143

SPECfp\_base2006 =

135

CPU2006 license: 9017

Test date: Dec-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Jul-2017

## Platform Notes (Continued)

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on SR860-01 Sat Dec 9 00:02:46 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
        4 "physical id"s (chips)
        112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 28
    siblings   : 28
    physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    cache size : 39424 KB
```

```
From /proc/meminfo
MemTotal:      792268052 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 3
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP3"
    VERSION_ID="12.3"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux SR860-01 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4)
x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8176)

**SPECfp2006 =**

**143**

**SPECfp\_base2006 =**

**135**

**CPU2006 license:** 9017

**Test date:** Dec-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Nov-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Jul-2017

## Platform Notes (Continued)

run-level 3 Dec 9 00:01

```
SPEC is set to: /home/cpu2006-1.2-ic17.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   686G  128G  558G  19% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE117I-1.10]- 10/19/2017

Memory:

48x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0/lib32:/home/cpu2006-1.2-ic17.0/lib64:/home/cpu2006-1.2-ic17.0/sh10.2"

OMP\_NUM\_THREADS = "112"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages disabled with:

```
echo never > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8176)

**SPECfp2006 =**

**143**

**SPECfp\_base2006 =**

**135**

**CPU2006 license:** 9017

**Test date:** Dec-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Nov-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Jul-2017

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8176)

**SPECfp2006 =**

**143**

**SPECfp\_base2006 =**

**135**

**CPU2006 license:** 9017

**Test date:** Dec-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Nov-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Jul-2017

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
-auto -unroll4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.10 GHz, Intel Xeon Platinum 8176)

**SPECfp2006 =** 143

**SPECfp\_base2006 =** 135

**CPU2006 license:** 9017

**Test date:** Dec-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Nov-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Jul-2017

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-E.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-E.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 27 12:05:37 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 December 2017.