



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(3.60 GHz, Intel Xeon Gold 5122)

**SPECint®2006 = 67.9**

**SPECint\_base2006 = 64.5**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Nov-2016

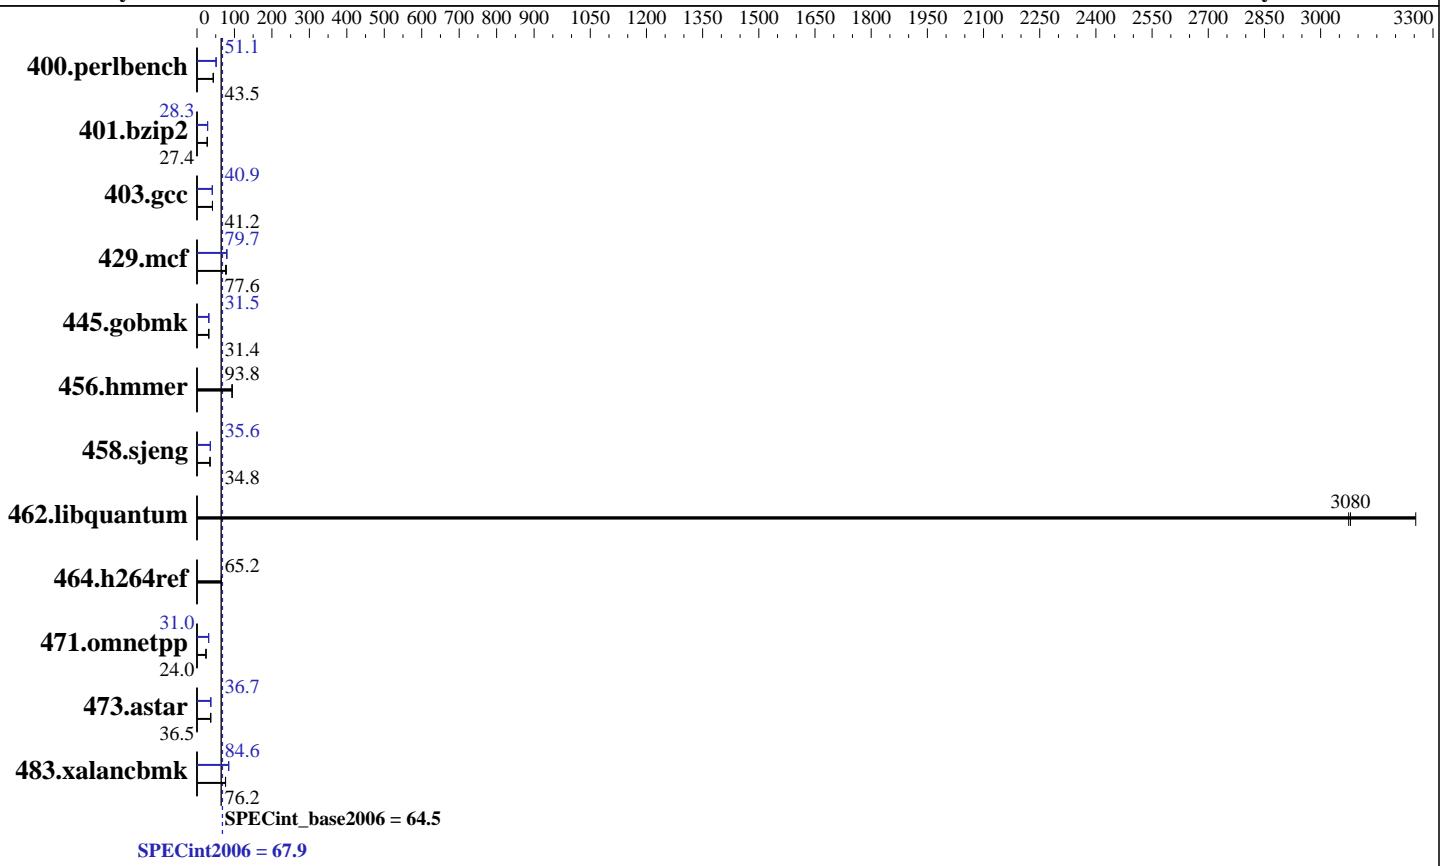

## Hardware

CPU Name: Intel Xeon Gold 5122  
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
CPU MHz: 3600  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1, 2 chip(s)  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core  
L3 Cache: 16.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)  
Disk Subsystem: 1 x 480 GB SATA SSD, RAID 0  
Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
Compiler: Kernel 3.10.0-514.el7.x86\_64  
Auto Parallel: C/C++: Version 17.0.1.132 of Intel C/C++ Compiler for Linux;  
File System: Fortran: Version 17.0.1.132 of Intel Fortran Compiler for Linux  
System State: Yes  
Base Pointers: xfs  
Peak Pointers: Run level 3 (multi-user)  
Other Software: 64-bit  
32/64-bit  
Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(3.60 GHz, Intel Xeon Gold 5122)

**SPECint2006 = 67.9**

**SPECint\_base2006 = 64.5**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Nov-2016

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	224	43.7	<b>225</b>	<b>43.5</b>	225	43.4	<b>192</b>	50.8	<b>191</b>	<b>51.1</b>	191	51.2
401.bzip2	352	27.4	352	27.4	<b>352</b>	<b>27.4</b>	<b>341</b>	28.3	<b>341</b>	<b>28.3</b>	340	28.3
403.gcc	<b>195</b>	<b>41.2</b>	195	41.2	195	41.4	<b>197</b>	41.0	197	40.9	<b>197</b>	<b>40.9</b>
429.mcf	116	78.4	<b>118</b>	<b>77.6</b>	119	76.3	<b>115</b>	79.2	114	79.8	<b>114</b>	<b>79.7</b>
445.gobmk	<b>334</b>	<b>31.4</b>	334	31.4	334	31.4	<b>333</b>	<b>31.5</b>	333	31.5	333	31.5
456.hmmer	<b>99.5</b>	<b>93.8</b>	99.0	94.3	99.9	93.4	<b>99.5</b>	<b>93.8</b>	99.0	94.3	99.9	93.4
458.sjeng	<b>348</b>	<b>34.8</b>	348	34.8	348	34.8	<b>339</b>	<b>35.6</b>	340	35.6	339	35.7
462.libquantum	6.37	3250	6.74	3070	<b>6.73</b>	<b>3080</b>	6.37	3250	6.74	3070	<b>6.73</b>	<b>3080</b>
464.h264ref	340	65.2	339	65.3	<b>339</b>	<b>65.2</b>	340	65.2	339	65.3	<b>339</b>	<b>65.2</b>
471.omnetpp	261	23.9	<b>260</b>	<b>24.0</b>	259	24.1	<b>201</b>	<b>31.0</b>	201	31.1	202	31.0
473.astar	<b>192</b>	<b>36.5</b>	192	36.5	192	36.6	<b>191</b>	<b>36.7</b>	191	36.7	191	36.8
483.xalancbmk	<b>90.6</b>	<b>76.2</b>	90.8	76.0	90.4	76.3	<b>81.6</b>	84.6	<b>81.6</b>	<b>84.6</b>	81.7	84.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

IRQ balance service was stop using "service irqbalance stop"

Tuned-adm profile was set to Throughput-Performance

## Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled

Thermal Configuration set to Maximum Cooling

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Peak Frequency Compute  
Energy/Performance Bias set to Maximum Performance

Workload Profile set to Custom

NUMA Group Size Optimization set to Flat

Sysinfo program /root/cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on localhost.localdomain Thu Dec 7 15:23:00 2017

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(3.60 GHz, Intel Xeon Gold 5122)

**SPECint2006 = 67.9**

**SPECint\_base2006 = 64.5**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Nov-2016

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 5122 CPU @ 3.60GHz
        2 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings   : 4
    physical 0: cores 1 5 9 13
    physical 1: cores 1 2 5 11
    cache size : 16896 kB
```

```
From /proc/meminfo
MemTotal:      197446384 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.3 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.3"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 7 15:13
```

```
SPEC is set to: /root/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   442G   28G  415G   7% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(3.60 GHz, Intel Xeon Gold 5122)

**SPECint2006 = 67.9**

**SPECint\_base2006 = 64.5**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Nov-2016

## Platform Notes (Continued)

BIOS HPE i41 09/29/2017

Memory:

4x UNKNOWN NOT AVAILABLE

12x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 192 GB and the dmidecode description should have one line reading as:

12x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/root/cpu2006/lib/ia32:/root/cpu2006/lib/intel64:/root/cpu2006/sh10.2"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(3.60 GHz, Intel Xeon Gold 5122)

**SPECint2006 = 67.9**

**SPECint\_base2006 = 64.5**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Nov-2016

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
-auto-p32
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

```
445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

```
473.astar: icpc -m64
```

## Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
403.gcc: -DSPEC_CPU_LP64
```

```
429.mcf: -DSPEC_CPU_LP64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -DSPEC_CPU_LP64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(3.60 GHz, Intel Xeon Gold 5122)

**SPECint2006 = 67.9**

**SPECint\_base2006 = 64.5**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Nov-2016

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -qopt-prefetch
```

```
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div -auto-ilp32 -qopt-prefetch
```

```
403.gcc: -xCORE-AVX512 -ipo -O3 -no-prec-div -inline-calloc
          -qopt-malloc-options=3 -auto-ilp32
```

```
429.mcf: -xCORE-AVX512 -ipo -O3 -no-prec-div -parallel
           -qopt-prefetch -auto-p32
```

```
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2)
```

```
456.hmmmer: basepeak = yes
```

```
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -unroll4
```

```
462.libquantum: basepeak = yes
```

```
464.h264ref: basepeak = yes
```

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
              -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -qopt-ra-region-strategy=block
              -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

```
473.astar: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
            -auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

```
483.xalancbmk: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
                 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(3.60 GHz, Intel Xeon Gold 5122)

**SPECint2006 = 67.9**

**SPECint\_base2006 = 64.5**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Nov-2016

## Peak Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 16 12:09:14 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 January 2018.