



SPEC® CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

Synergy 480 Gen10
(3.60 GHz, Intel Xeon Platinum 8156)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 542

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Apr-2017

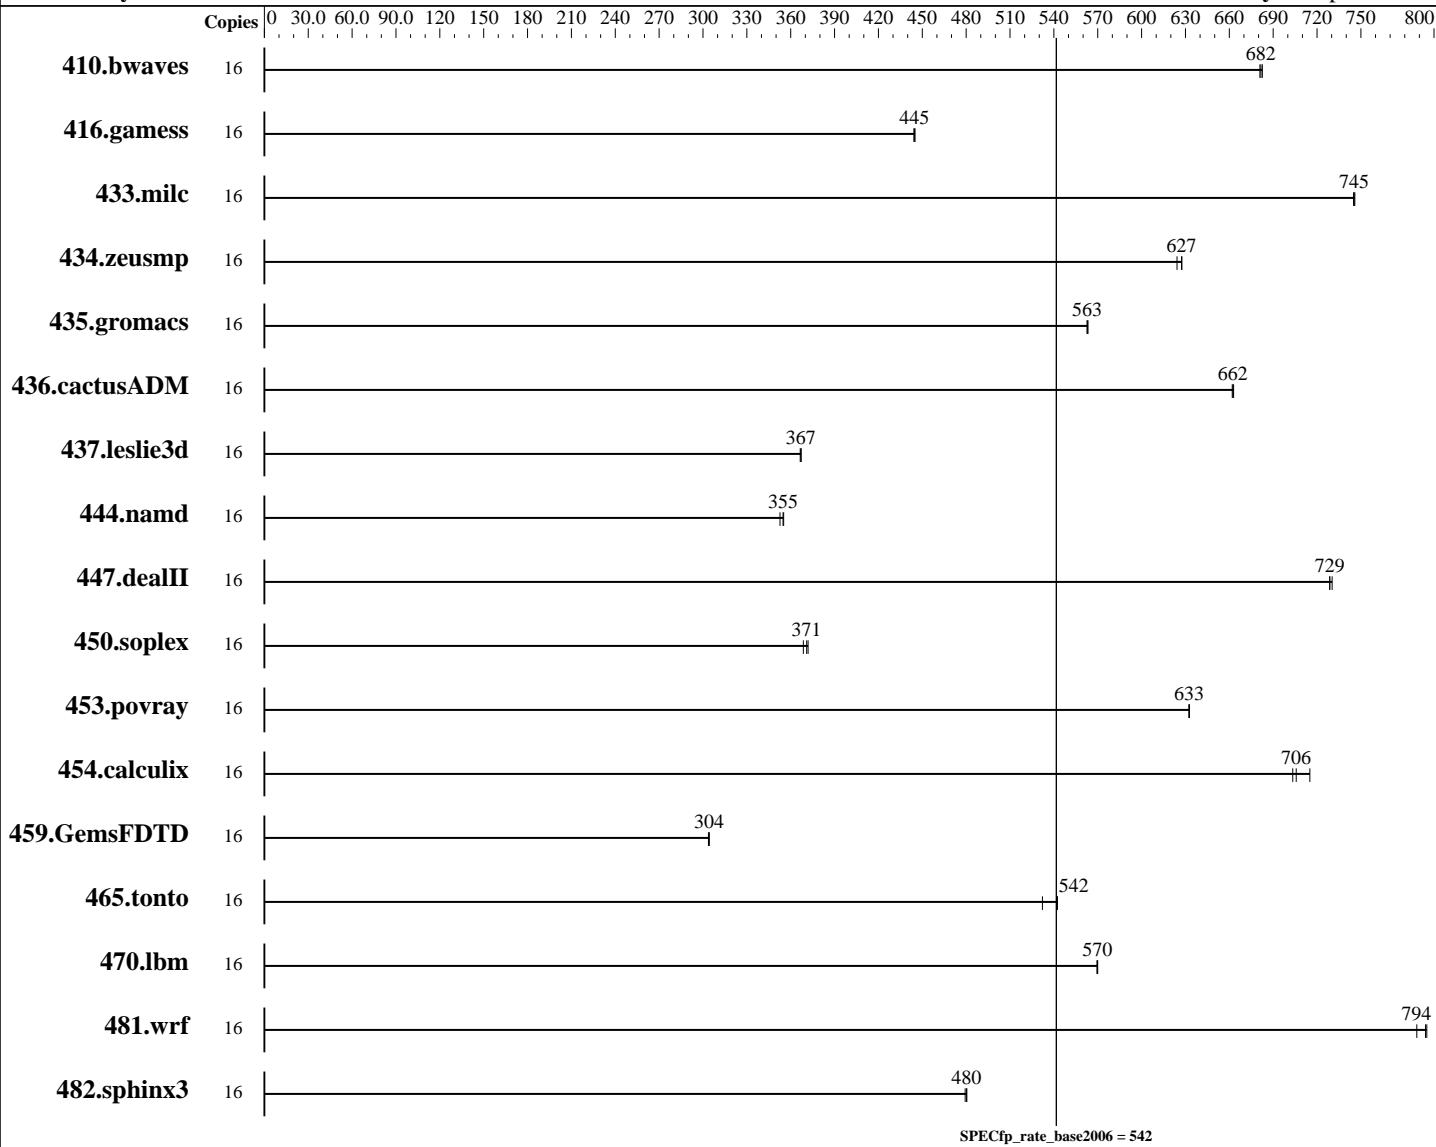

Hardware

CPU Name: Intel Xeon Platinum 8156
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 3600
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1, 2 chip(s)
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP2
Compiler: Kernel 4.4.21-69-default
C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.60 GHz, Intel Xeon Platinum 8156)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 542

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Apr-2017

L3 Cache: 16.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Disk Subsystem: 1 x 480 GB SATA SSD, RAID 0
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: Not Applicable
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	319	682	319	683	319	681							
416.gamess	16	704	445	705	445	705	444							
433.milc	16	197	745	197	746	197	745							
434.zeusmp	16	233	624	232	627	232	628							
435.gromacs	16	203	563	203	563	203	563							
436.cactusADM	16	289	662	289	662	288	663							
437.leslie3d	16	410	367	410	367	410	367							
444.namd	16	361	355	362	355	364	353							
447.dealII	16	251	730	251	729	251	729							
450.soplex	16	359	372	362	369	360	371							
453.povray	16	135	632	135	633	135	633							
454.calculix	16	188	703	185	715	187	706							
459.GemsFDTD	16	559	304	558	304	558	304							
465.tonto	16	296	532	290	542	290	542							
470.lbm	16	386	570	386	570	386	570							
481.wrf	16	227	788	225	795	225	794							
482.sphinx3	16	649	480	649	480	651	479							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

irqbalance disabled with "service irqbalance stop"

tuned profile set with "tuned-adm profile throughput-performance"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.60 GHz, Intel Xeon Platinum 8156)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 542

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Apr-2017

Operating System Notes (Continued)

VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel numa_balancing"

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Throughput Compute
Minimum Processor Idle Power Core C-State set to C1E State
Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on sy480_m3_sles Sun Dec 3 01:36:25 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8156 CPU @ 3.60GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 4
        siblings : 8
        physical 0: cores 1 2 5 11
        physical 1: cores 1 5 9 13
        cache size : 16896 KB
```

```
From /proc/meminfo
MemTotal:      395931372 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.60 GHz, Intel Xeon Platinum 8156)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 542

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Apr-2017

Platform Notes (Continued)

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux sy480_m3_sles 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 3 01:34

SPEC is set to: /home/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	405G	70G	336G	18%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I42 11/14/2017

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.60 GHz, Intel Xeon Platinum 8156)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 542

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Apr-2017

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.60 GHz, Intel Xeon Platinum 8156)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 542

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 16 12:09:41 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 January 2018.