



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6130, 2.10 GHz)

SPECfp<sup>®</sup>\_rate2006 = 2490

SPECfp\_rate\_base2006 = 2450

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

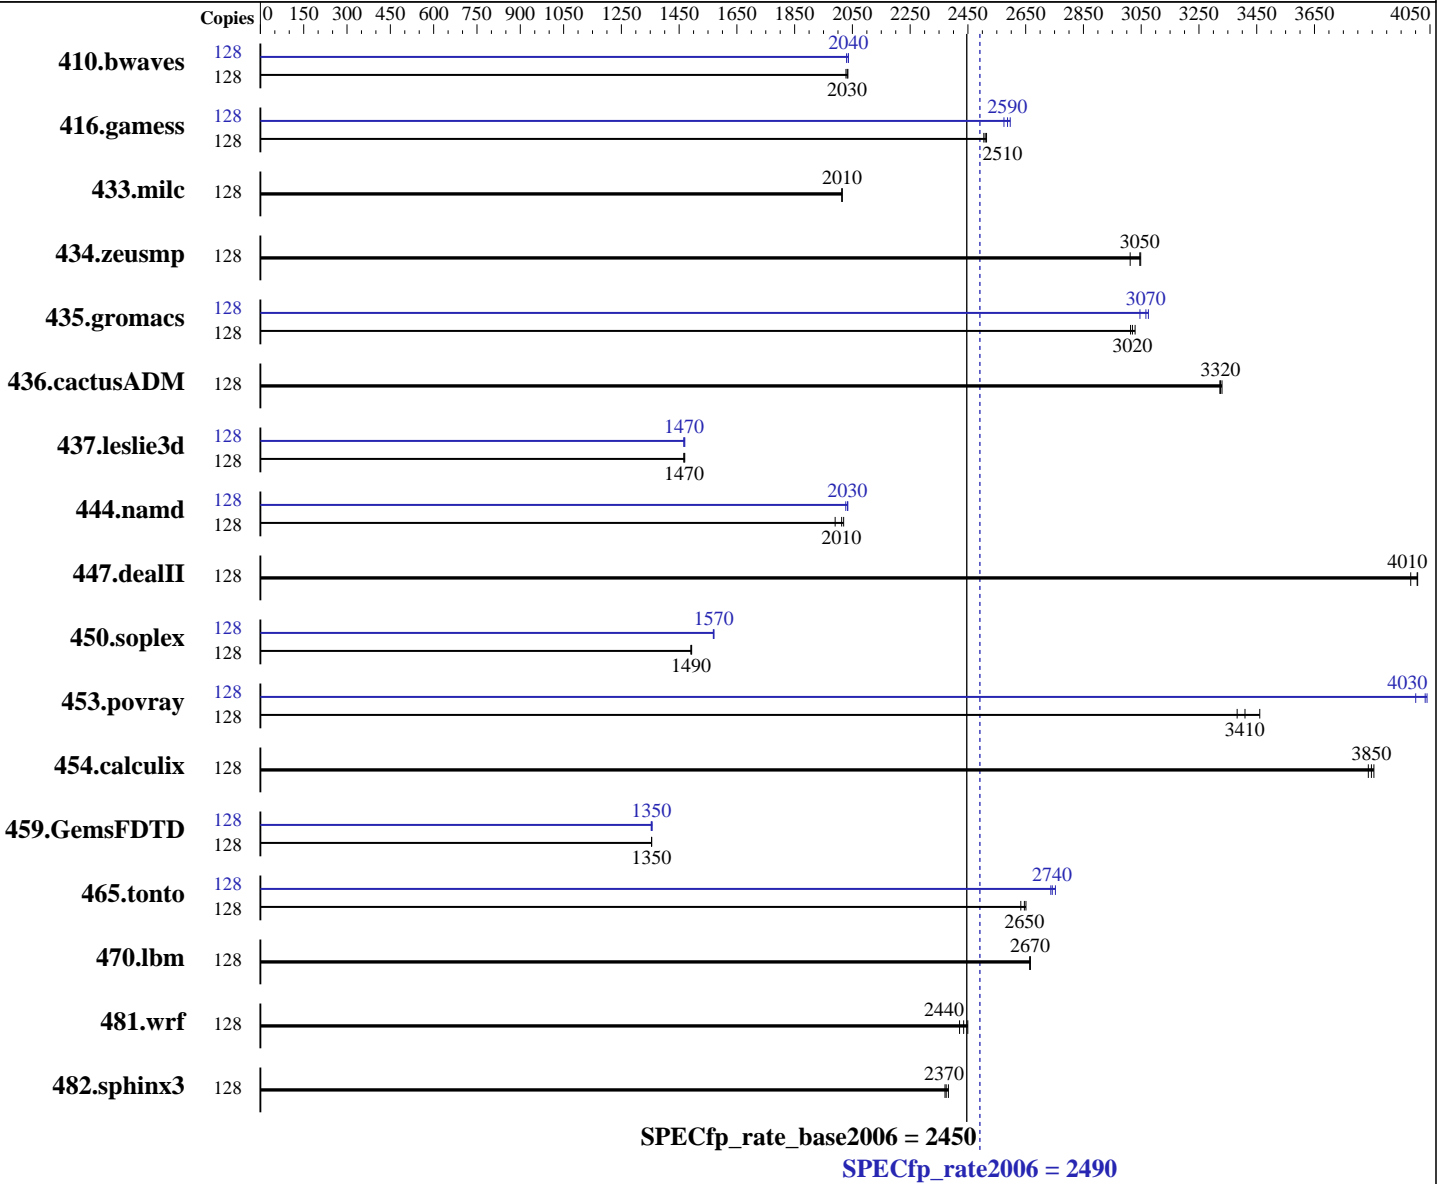

### Hardware

CPU Name: Intel Xeon Gold 6130  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64) 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6130, 2.10 GHz)

SPECfp\_rate2006 = 2490

SPECfp\_rate\_base2006 = 2450

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

L3 Cache: 22 MB I+D on chip per chip  
Other Cache: None  
Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2666V-R)  
Disk Subsystem: 1 x 600 GB SAS HDD, 10K RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	855	2030	858	2030	<b>856</b>	<b>2030</b>	128	<b>854</b>	<b>2040</b>	857	2030	854	2040
416.gamess	128	997	2510	1000	2510	<b>999</b>	<b>2510</b>	128	965	2600	<b>969</b>	<b>2590</b>	973	2570
433.milc	128	584	2010	583	2010	<b>583</b>	<b>2010</b>	128	584	2010	583	2010	<b>583</b>	<b>2010</b>
434.zeusmp	128	382	3050	<b>383</b>	<b>3050</b>	387	3010	128	382	3050	<b>383</b>	<b>3050</b>	387	3010
435.gromacs	128	302	3030	303	3010	<b>303</b>	<b>3020</b>	128	300	3050	<b>298</b>	<b>3070</b>	297	3070
436.cactusADM	128	460	3320	<b>460</b>	<b>3320</b>	459	3330	128	460	3320	<b>460</b>	<b>3320</b>	459	3330
437.leslie3d	128	<b>820</b>	<b>1470</b>	820	1470	819	1470	128	821	1470	819	1470	<b>820</b>	<b>1470</b>
444.namd	128	516	1990	<b>510</b>	<b>2010</b>	508	2020	128	506	2030	505	2030	<b>505</b>	<b>2030</b>
447.dealII	128	365	4010	<b>366</b>	<b>4010</b>	368	3980	128	365	4010	<b>366</b>	<b>4010</b>	368	3980
450.soplex	128	716	1490	715	1490	<b>715</b>	<b>1490</b>	128	680	1570	<b>680</b>	<b>1570</b>	681	1570
453.povray	128	<b>200</b>	<b>3410</b>	197	3460	201	3380	128	169	4040	170	4000	<b>169</b>	<b>4030</b>
454.calculix	128	<b>274</b>	<b>3850</b>	274	3860	275	3840	128	<b>274</b>	<b>3850</b>	274	3860	275	3840
459.GemsFDTD	128	1003	1350	1002	1350	<b>1003</b>	<b>1350</b>	128	1004	1350	1001	1360	<b>1003</b>	<b>1350</b>
465.tonto	128	478	2630	475	2650	<b>476</b>	<b>2650</b>	128	<b>459</b>	<b>2740</b>	460	2740	458	2750
470.lbm	128	<b>660</b>	<b>2670</b>	660	2660	660	2670	128	<b>660</b>	<b>2670</b>	660	2660	660	2670
481.wrf	128	591	2420	<b>587</b>	<b>2440</b>	584	2450	128	591	2420	<b>587</b>	<b>2440</b>	584	2450
482.sphinx3	128	<b>1051</b>	<b>2370</b>	1052	2370	1047	2380	128	<b>1051</b>	<b>2370</b>	1052	2370	1047	2380

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Intel HyperThreading Technology set to Enabled  
CPU performance set to Enterprise

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6130, 2.10 GHz)

SPECfp\_rate2006 = 2490

SPECfp\_rate\_base2006 = 2450

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Dec-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

Power Performance Tuning set to OS Controls  
SNC set to Enabled  
IMC Interleaving set to 1-way Interleave  
Patrol Scrub set to Disabled  
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-vb5q Fri Jan 1 06:36:03 2010

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
 4 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 16
  siblings  : 32
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 22528 KB
```

```
From /proc/meminfo
MemTotal:      791027716 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-vb5q 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6130, 2.10 GHz)

SPECfp\_rate2006 = 2490

SPECfp\_rate\_base2006 = 2450

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Dec-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

run-level 3 Dec 31 19:19

SPEC is set to: /opt/cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	xfs	280G	118G	162G	43%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. B480M5.3.2.2a.0.0919171641 09/19/2017

Memory:

48x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/lib/ia32:/opt/cpu2006-1.2/lib/intel64:/opt/cpu2006-1.2/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6130, 2.10 GHz)

SPECfp\_rate2006 = 2490

SPECfp\_rate\_base2006 = 2450

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Dec-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### General Notes (Continued)

and software available as of the publication date.

### Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

### Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6130, 2.10 GHz)

SPECfp\_rate2006 = 2490

SPECfp\_rate\_base2006 = 2450

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -D\_FILE\_OFFSET\_BITS=64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6130, 2.10 GHz)

SPECfp\_rate2006 = 2490

SPECfp\_rate\_base2006 = 2450

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Peak Optimization Flags

### C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32  
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

### Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6130, 2.10 GHz)

SPECfp\_rate2006 = 2490

SPECfp\_rate\_base2006 = 2450

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Mon Feb 26 10:21:54 2018 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 February 2018.