



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

**SPECrate®2017\_int\_base = 272**

**SPECrate®2017\_int\_peak = 300**

CPU2017 License: 3


**Test Date:** Nov-2017

**Test Sponsor:** HPE

**Hardware Availability:** Nov-2017

**Tested by:** HPE

**Software Availability:** Sep-2017

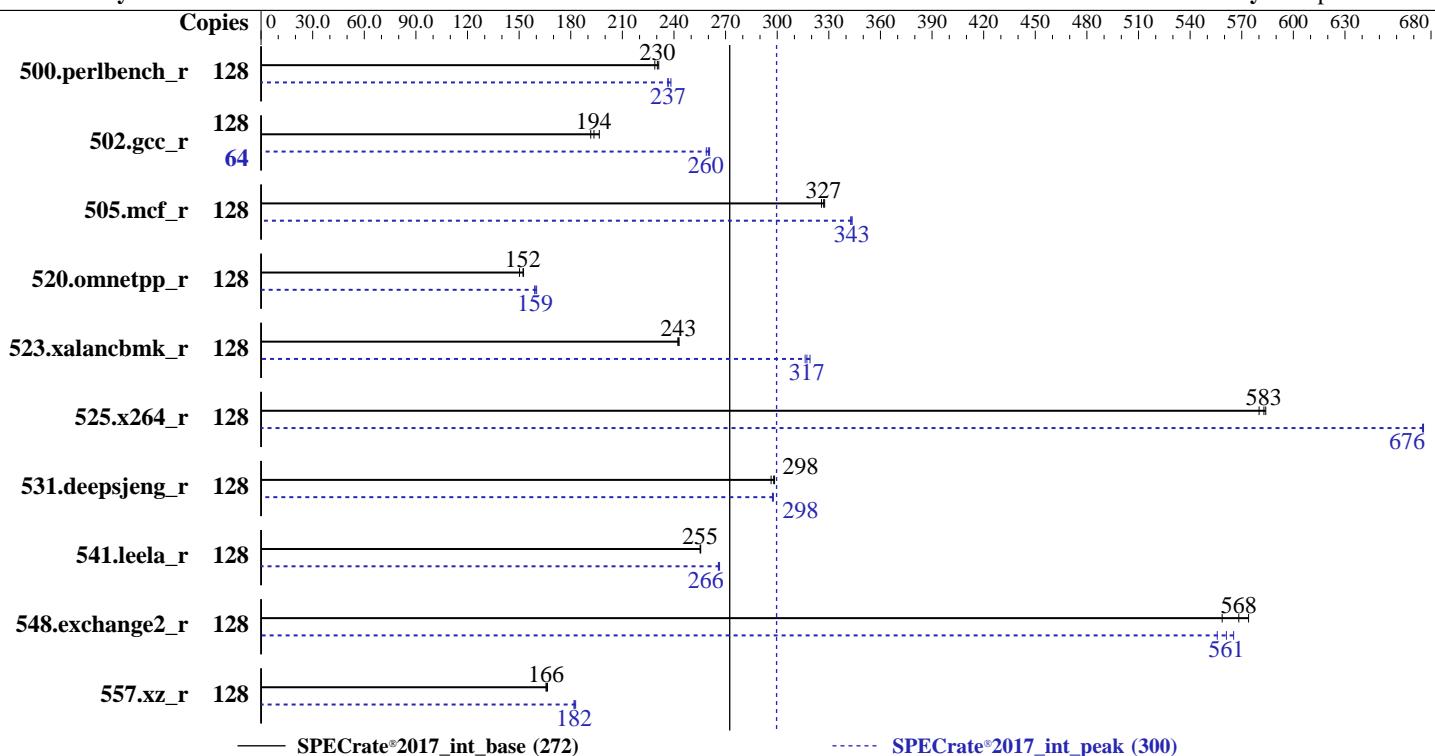

## Hardware

CPU Name: AMD EPYC 7601  
 Max MHz: 3200  
 Nominal: 2200  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)  
 Storage: 1 x 300 GB 15 K RPM SAS, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.73-5-default  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: HPE BIOS Version A40 released Nov-2017 (tested with A40 10/13/2017)  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc general purpose malloc implementation v4.5.0  
 Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

**SPECrate®2017\_int\_base = 272**

**SPECrate®2017\_int\_peak = 300**

CPU2017 License: 3

**Test Date:** Nov-2017

Test Sponsor: HPE

**Hardware Availability:** Nov-2017

Tested by: HPE

**Software Availability:** Sep-2017

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	882	231	890	229	<b>885</b>	<b>230</b>	128	<b>861</b>	<b>237</b>	855	238	862	236		
502.gcc_r	128	946	192	922	197	<b>937</b>	<b>194</b>	64	<b>349</b>	<b>260</b>	350	259	348	261		
505.mcf_r	128	631	328	<b>633</b>	<b>327</b>	635	326	128	604	343	<b>602</b>	<b>343</b>	602	343		
520.omnetpp_r	128	1101	153	<b>1103</b>	<b>152</b>	1118	150	128	1048	160	1056	159	<b>1054</b>	<b>159</b>		
523.xalancbmk_r	128	556	243	558	242	<b>557</b>	<b>243</b>	128	427	316	<b>426</b>	<b>317</b>	424	319		
525.x264_r	128	<b>385</b>	<b>583</b>	386	580	384	584	128	<b>332</b>	<b>676</b>	332	676	332	675		
531.deepsjeng_r	128	<b>492</b>	<b>298</b>	491	298	495	296	128	493	298	<b>493</b>	<b>298</b>	494	297		
541.leela_r	128	830	255	829	256	<b>830</b>	<b>255</b>	128	797	266	795	266	<b>797</b>	<b>266</b>		
548.exchange2_r	128	584	574	600	559	<b>590</b>	<b>568</b>	128	<b>598</b>	<b>561</b>	593	565	603	556		
557.xz_r	128	830	166	834	166	<b>834</b>	<b>166</b>	128	<b>759</b>	<b>182</b>	760	182	756	183		

**SPECrate®2017\_int\_base = 272**

**SPECrate®2017\_int\_peak = 300**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory

sync then drop\_caches=3 to reset caches before invoking runcpu

Linux governor set to performance with cpupower "cpupower frequency-set -r -g performance"

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECrate®2017\_int\_base = 272

SPECrate®2017\_int\_peak = 300

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:"  
MALLOC_CONF = "lg_chunk:26"
```

The AMD64 AOCC Compiler Suite is available at

<http://developer.amd.com/tools-and-sdks/cpu-development/amd-optimizing-cc-compiler/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at  
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing  
of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to  $2^{21} = 2\text{MiB}$ .

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers  
with gfortran. It is available here:

<http://developer.amd.com/amd-aocc/>

## Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

Performance Determinism set to Power Deterministic

Processor Power and Utilization Monitoring set to Disabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C6 State

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-d9tl Wed Nov 1 12:20:39 2017
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7601 32-Core Processor
```

```
 2 "physical id"s (chips)
```

```
 128 "processors"
```

```
cores, siblings (Caution: counting these is hw and system dependent. The following
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECrate®2017\_int\_base = 272

SPECrate®2017\_int\_peak = 300

CPU2017 License: 3

Test Date: Nov-2017

Test Sponsor: HPE

Hardware Availability: Nov-2017

Tested by: HPE

Software Availability: Sep-2017

## Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 32
siblings   : 64
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             2
NUMA node(s):          8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7601 32-Core Processor
Stepping:               2
CPU MHz:               2200.000
CPU max MHz:           2200.0000
CPU min MHz:           1200.0000
BogoMIPS:              4391.66
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:               512K
L3 cache:               8192K
NUMA node0 CPU(s):     0-7,64-71
NUMA node1 CPU(s):     8-15,72-79
NUMA node2 CPU(s):     16-23,80-87
NUMA node3 CPU(s):     24-31,88-95
NUMA node4 CPU(s):     32-39,96-103
NUMA node5 CPU(s):     40-47,104-111
NUMA node6 CPU(s):     48-55,112-119
NUMA node7 CPU(s):     56-63,120-127
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpfperf eagerfpu dni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skininit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap
clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf overflow_recov succor smca
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECrate®2017\_int\_base = 272

SPECrate®2017\_int\_peak = 300

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 128846 MB
node 0 free: 128637 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 129021 MB
node 1 free: 128794 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 129021 MB
node 2 free: 128811 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 129021 MB
node 3 free: 128811 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 129021 MB
node 4 free: 128857 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 129021 MB
node 5 free: 128861 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 129021 MB
node 6 free: 128851 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 129020 MB
node 7 free: 128857 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 16 16 16 32 32 32 32
  1: 16 10 16 16 32 32 32 32
  2: 16 16 10 16 32 32 32 32
  3: 16 16 16 10 32 32 32 32
  4: 32 32 32 32 10 16 16 16
  5: 32 32 32 32 16 10 16 16
  6: 32 32 32 32 16 16 10 16
  7: 32 32 32 32 16 16 16 10
```

From /proc/meminfo

```
MemTotal: 1056761416 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECrate®2017\_int\_base = 272

SPECrate®2017\_int\_peak = 300

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 3
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP3"
    VERSION_ID="12.3"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux linux-d9tl 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Nov 1 11:55

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   238G  112G  126G  48%  /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS HPE A40 10/14/2017
Memory:
16x UNKNOWN NOT AVAILABLE
16x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2666

(End of data from sysinfo program)
```

## Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECrate®2017\_int\_base = 272

SPECrate®2017\_int\_peak = 300

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

C	500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
	525.x264_r(base, peak) 557.xz_r(base, peak)

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

C	502.gcc_r(peak)
---	-----------------

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

C	500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
	525.x264_r(base, peak) 557.xz_r(base, peak)

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

C++	523.xalancbmk_r(peak)
-----	-----------------------

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECrate®2017\_int\_base = 272

SPECrate®2017\_int\_peak = 300

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
```

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

```
-----
```

```
=====
C++      | 523.xalancbmk_r(peak)
-----
```

```
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
```

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

```
-----
```

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
```

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

```
-----
```

```
=====
Fortran | 548.exchange2_r(base, peak)
-----
```

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

```
-----
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECrate®2017\_int\_base = 272

SPECrate®2017\_int\_peak = 300

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-flicht -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math  
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100  
-fremap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flicht -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3  
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive  
-fremap-arrays -inline-threshold=1000 -z muldefs -ljemalloc
```

Fortran benchmarks:

```
-flicht -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -mavx -madx  
-funroll-loops -ffast-math -z muldefs -Ofast -fdefault-integer-8  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-lsr-in-nested-loop -enable-iv-split"
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECrate®2017\_int\_base = 272

SPECrate®2017\_int\_peak = 300

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran  
-lamdlibm
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
clang gfortran
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECrate®2017\_int\_base = 272

SPECrate®2017\_int\_peak = 300

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

502.gcc\_r: -m32 -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -fgnu89-inline  
-D\_FILE\_OFFSET\_BITS=64(\*) -ljemalloc

505.mcf\_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000 -ljemalloc

523.xalancbmk\_r: -m32 -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000  
-D\_FILE\_OFFSET\_BITS=64(\*) -ljemalloc

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm  
-unroll-count=8 -unroll-threshold=100 -ljemalloc

Fortran benchmarks:

-flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3 -mavx2 -madx -funroll-loops  
-ffast-math -Ofast -fdefault-integer-8 -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-lsr-in-nested-loop -enable-iv-split  
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran  
-lamdlibm

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECrate®2017\_int\_base = 272

SPECrate®2017\_int\_peak = 300

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

(\*) Indicates an optimization flag that was found in a portability variable.

## Peak Other Flags

C benchmarks:

502.gcc\_r: -L/root/work/lib/jemalloc/lib32

C++ benchmarks:

523.xalancbmk\_r: -L/root/work/lib/jemalloc/lib32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.html>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.xml>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.2 on 2017-11-01 13:20:38-0400.

Report generated on 2020-05-15 15:04:53 by CPU2017 PDF formatter v6255.

Originally published on 2017-11-29.