



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu


PRIMEQUEST 3800B, Intel Xeon Platinum 8158, 3.00GHz

SPECrate2017\_int\_base = 619

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Oct-2017  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

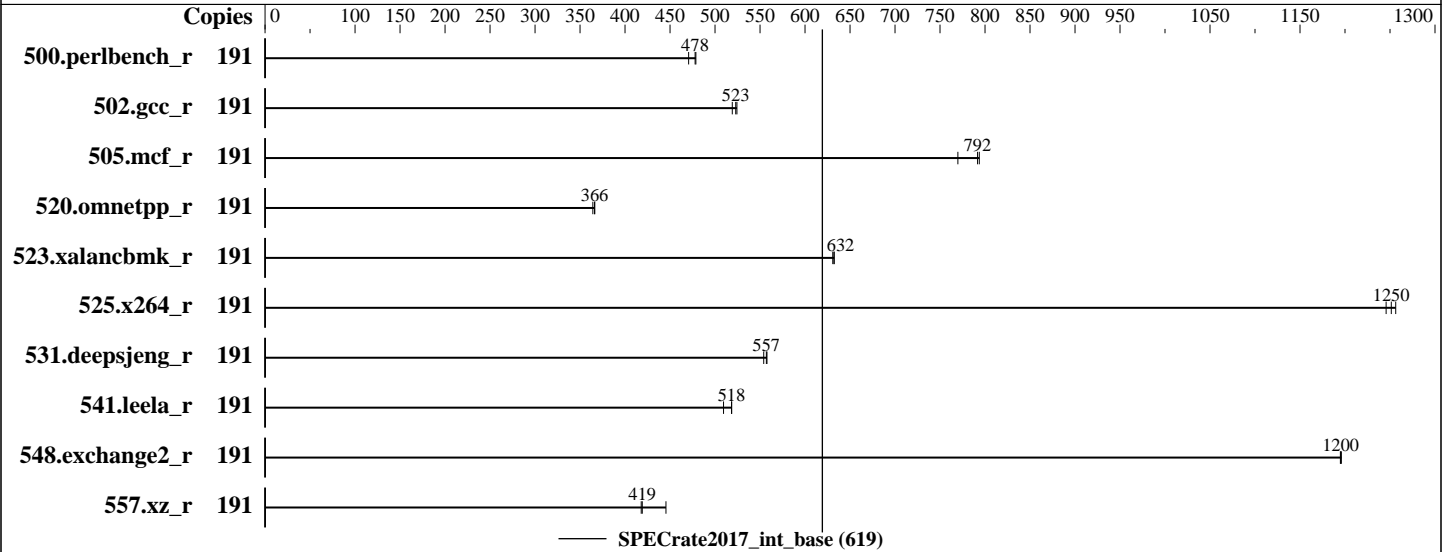

### Hardware

CPU Name: Intel Xeon Platinum 8158  
 Max MHz.: 3700  
 Nominal: 3000  
 Enabled: 96 cores, 8 chips, 2 threads/core  
 Orderable: 2,4,6,8 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (96 x 16 GB 2Rx4 PC4-2666V-R)  
 Storage: 768 GB tmpfs  
 Other: 1 x SAS HDD, 600 GB, 10.5K RPM, used for swap

### Software

OS: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.21.0 for D3858-A1x. Released Dec-2017  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc: jemalloc memory allocator library V5.0.1;  
 jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
 jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
 jemalloc: sources available from jemalloc.net or releases



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8158, 3.00GHz

SPECrate2017\_int\_base = 619

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Oct-2017  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	191	635	479	<b>636</b>	<b>478</b>	646	471							
502.gcc_r	191	516	524	521	519	<b>517</b>	<b>523</b>							
505.mcf_r	191	389	794	<b>390</b>	<b>792</b>	401	770							
520.omnetpp_r	191	684	366	<b>684</b>	<b>366</b>	688	364							
523.xalancbmk_r	191	<b>319</b>	<b>632</b>	320	631	319	632							
525.x264_r	191	<b>267</b>	<b>1250</b>	268	1250	266	1260							
531.deepsjeng_r	191	395	554	392	558	<b>393</b>	<b>557</b>							
541.leela_r	191	621	509	<b>610</b>	<b>518</b>	610	518							
548.exchange2_r	191	418	1200	419	1190	<b>419</b>	<b>1200</b>							
557.xz_r	191	463	445	<b>492</b>	<b>419</b>	494	418							

SPECrate2017\_int\_base = 619

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter: nohz_full=1-191 isolcpus=1-191
Set tmpfs filesystem with:
mkdir /home/memory
mount -t tmpfs -o size=768g,rw tmpfs /home/memory
Process tuning setting:
echo 0 > /proc/sys/kernel/numa_balancing
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
Set affinity of rcu threads to the cpu0:
for i in `pgrep rcu` ; do taskset -pc 0 $i ; done
```

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/memory/speccpu/je5.0.1-32:/home/memory/speccpu/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8158, 3.00GHz

SPECrate2017\_int\_base = 619

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## General Notes (Continued)

```

memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

```

## Platform Notes

```

BIOS configuration:
DCU Streamer Prefetcher = Disabled
Sub NUMA Clustering = Enabled
Stale AtoS = Enabled
LLC Dead Line Alloc = Disabled
Fan Control = Full
Sysinfo program /home/memory/speccpu/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-k55j Fri Oct 20 19:01:46 2017

```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz
      8 "physical id"s (chips)
      192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings  : 24
physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26
physical 1: cores 0 1 2 3 9 10 11 17 19 25 26 27
physical 2: cores 1 2 3 4 8 9 10 11 19 24 25 27
physical 3: cores 0 1 2 3 4 8 9 11 17 18 19 20
physical 4: cores 0 1 2 3 4 9 10 16 18 19 25 26
physical 5: cores 0 1 2 3 4 9 10 16 18 19 25 26
physical 6: cores 0 1 2 3 4 8 10 11 18 24 25 27
physical 7: cores 0 3 4 5 6 7 16 18 19 20 21 22

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 192

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8158, 3.00GHz

SPECrate2017\_int\_base = 619

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2017  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

On-line CPU(s) list:    0-191
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):              8
NUMA node(s):          16
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz
Stepping:               4
CPU MHz:                3600.000
CPU max MHz:            3700.0000
CPU min MHz:            1200.0000
BogoMIPS:               6000.34
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                25344K
NUMA node0 CPU(s):     0-2,5,7,10,96-98,101,103,106
NUMA node1 CPU(s):     3,4,6,8,9,11,99,100,102,104,105,107
NUMA node2 CPU(s):     12-14,16,19,21,108-110,112,115,117
NUMA node3 CPU(s):     15,17,18,20,22,23,111,113,114,116,118,119
NUMA node4 CPU(s):     24,25,28,29,33,34,120,121,124,125,129,130
NUMA node5 CPU(s):     26,27,30-32,35,122,123,126-128,131
NUMA node6 CPU(s):     36-38,41,42,44,132-134,137,138,140
NUMA node7 CPU(s):     39,40,43,45-47,135,136,139,141-143
NUMA node8 CPU(s):     48-50,53,55,58,144-146,149,151,154
NUMA node9 CPU(s):     51,52,54,56,57,59,147,148,150,152,153,155
NUMA node10 CPU(s):    60-62,65,67,70,156-158,161,163,166
NUMA node11 CPU(s):    63,64,66,68,69,71,159,160,162,164,165,167
NUMA node12 CPU(s):    72-74,77,81,82,168-170,173,177,178
NUMA node13 CPU(s):    75,76,78-80,83,171,172,174-176,179
NUMA node14 CPU(s):    84-86,90-92,180-182,186-188
NUMA node15 CPU(s):    87-89,93-95,183-185,189-191
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm hwp
hwp_act_window hwp_epp hwp_pkg_req intel_pt tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 cqm_llc cqm_occup_llc

```

/proc/cpuinfo cache data

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8158, 3.00GHz

SPECrate2017\_int\_base = 619

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Oct-2017  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

### Platform Notes (Continued)

cache size : 25344 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 5 7 10 96 97 98 101 103 106
node 0 size: 95377 MB
node 0 free: 85738 MB
node 1 cpus: 3 4 6 8 9 11 99 100 102 104 105 107
node 1 size: 96763 MB
node 1 free: 96494 MB
node 2 cpus: 12 13 14 16 19 21 108 109 110 112 115 117
node 2 size: 96763 MB
node 2 free: 96495 MB
node 3 cpus: 15 17 18 20 22 23 111 113 114 116 118 119
node 3 size: 96763 MB
node 3 free: 96495 MB
node 4 cpus: 24 25 28 29 33 34 120 121 124 125 129 130
node 4 size: 96763 MB
node 4 free: 96493 MB
node 5 cpus: 26 27 30 31 32 35 122 123 126 127 128 131
node 5 size: 96763 MB
node 5 free: 96488 MB
node 6 cpus: 36 37 38 41 42 44 132 133 134 137 138 140
node 6 size: 96763 MB
node 6 free: 96496 MB
node 7 cpus: 39 40 43 45 46 47 135 136 139 141 142 143
node 7 size: 96763 MB
node 7 free: 96503 MB
node 8 cpus: 48 49 50 53 55 58 144 145 146 149 151 154
node 8 size: 96763 MB
node 8 free: 96493 MB
node 9 cpus: 51 52 54 56 57 59 147 148 150 152 153 155
node 9 size: 96763 MB
node 9 free: 96497 MB
node 10 cpus: 60 61 62 65 67 70 156 157 158 161 163 166
node 10 size: 96763 MB
node 10 free: 96487 MB
node 11 cpus: 63 64 66 68 69 71 159 160 162 164 165 167
node 11 size: 96763 MB
node 11 free: 96489 MB
node 12 cpus: 72 73 74 77 81 82 168 169 170 173 177 178
node 12 size: 96763 MB
node 12 free: 96492 MB
node 13 cpus: 75 76 78 79 80 83 171 172 174 175 176 179
node 13 size: 96763 MB
node 13 free: 96492 MB

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8158, 3.00GHz

SPECrate2017\_int\_base = 619

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Oct-2017  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

### Platform Notes (Continued)

```

node 14 cpus: 84 85 86 90 91 92 180 181 182 186 187 188
node 14 size: 96763 MB
node 14 free: 96481 MB
node 15 cpus: 87 88 89 93 94 95 183 184 185 189 190 191
node 15 size: 96613 MB
node 15 free: 96345 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
 0:  10 11 35 35 35 35 40 40 40 40 40 40 35 35 40 40
 1:  11 10 35 35 35 35 40 40 40 40 40 40 40 35 35 40 40
 2:  35 35 10 11 40 40 35 35 40 40 35 35 40 40 40 40 40
 3:  35 35 11 10 40 40 35 35 40 40 35 35 40 40 40 40 40
 4:  35 35 40 40 10 11 35 35 35 35 40 40 40 40 40 40 40
 5:  35 35 40 40 11 10 35 35 35 35 40 40 40 40 40 40 40
 6:  40 40 35 35 35 35 10 11 40 40 40 40 40 40 40 35 35
 7:  40 40 35 35 35 35 11 10 40 40 40 40 40 40 40 35 35
 8:  40 40 40 40 35 35 40 40 10 11 35 35 35 35 40 40 40
 9:  40 40 40 40 35 35 40 40 11 10 35 35 35 35 40 40 40
10:  40 40 35 35 40 40 40 40 35 35 10 11 40 40 35 35 35
11:  40 40 35 35 40 40 40 40 35 35 11 10 40 40 35 35 35
12:  35 35 40 40 40 40 40 40 35 35 40 40 10 11 35 35 35
13:  35 35 40 40 40 40 40 40 35 35 40 40 11 10 35 35 35
14:  40 40 40 40 40 40 35 35 40 40 35 35 35 35 10 11 11
15:  40 40 40 40 40 40 35 35 40 40 35 35 35 35 11 10 10

```

From /proc/meminfo

```

MemTotal:      1583801256 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

uname -a:

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8158, 3.00GHz

SPECrate2017\_int\_base = 619

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2017  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```
Linux linux-k55j 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 20 00:46
```

```
SPEC is set to: /home/memory/speccpu
```

```
Filesystem      Type      Size      Used Avail Use% Mounted on
tmpfs            tmpfs     768G      8.8G   760G    2% /home/memory
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU V1.0.0.0 R1.21.0 for D3858-A1x 09/15/2017
```

Memory:

```
48x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666
48x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMEQUEST 3800B, Intel Xeon Platinum 8158,  
3.00GHz

SPECrate2017\_int\_base = 619

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2017  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8158,  
3.00GHz

SPECrate2017\_int\_base = 619

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-10-20 06:01:45-0400.

Report generated on 2018-10-31 13:05:16 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.