



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_int_base = 9.15

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

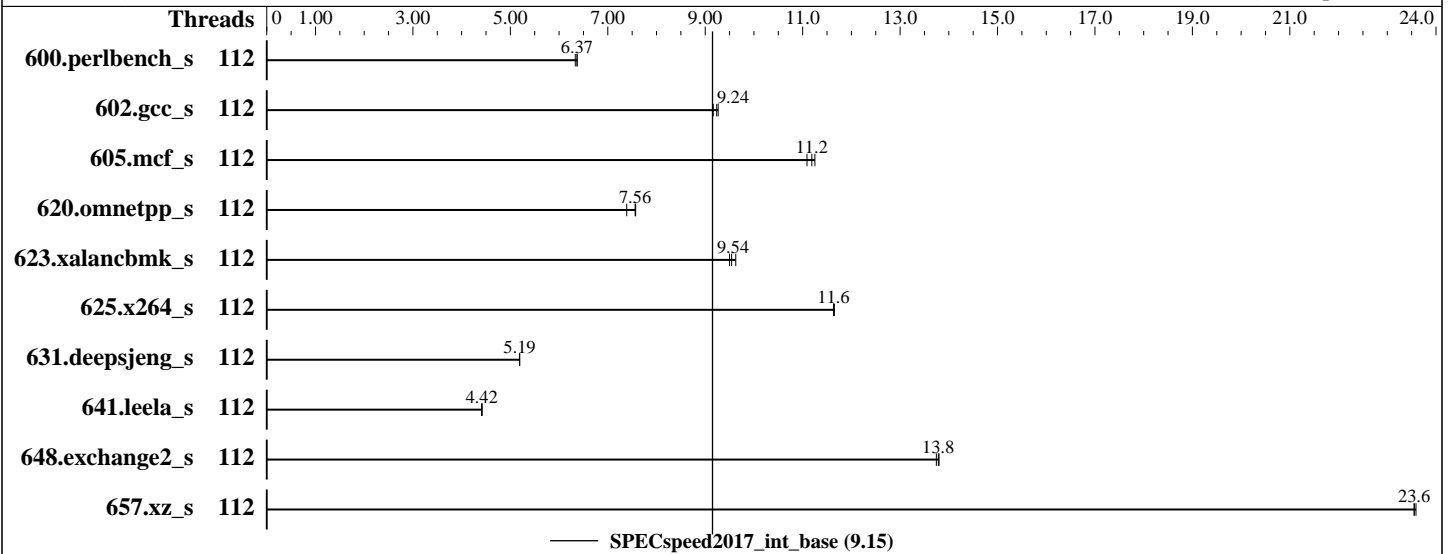

Hardware

CPU Name: Intel Xeon Platinum 8180M
 Max MHz.: 3800
 Nominal: 2500
 Enabled: 112 cores, 4 chips
 Orderable: 1, 2, 4 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 480 GB SATA SSD, RAID 0
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo),
 Kernel 4.4.73-5-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: HPE BIOS Version U34 released Oct-2017 (tested with U34 9/29/2017)
 File System: xfs
 System State: Run level 3 (mult-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc: jemalloc memory allocator library V5.0.1;
 jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
 jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
 jemalloc: sources available via jemalloc.net



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_int_base = 9.15

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	112	280	6.33	279	6.37	<u>279</u>	<u>6.37</u>									
602.gcc_s	112	434	9.16	430	9.27	<u>431</u>	<u>9.24</u>									
605.mcf_s	112	<u>422</u>	<u>11.2</u>	420	11.3	426	11.1									
620.omnetpp_s	112	<u>216</u>	<u>7.56</u>	215	7.57	221	7.39									
623.xalancbmk_s	112	149	9.50	147	9.63	<u>149</u>	<u>9.54</u>									
625.x264_s	112	<u>152</u>	<u>11.6</u>	151	11.7	152	11.6									
631.deepsjeng_s	112	276	5.19	276	5.19	<u>276</u>	<u>5.19</u>									
641.leela_s	112	386	4.42	386	4.41	<u>386</u>	<u>4.42</u>									
648.exchange2_s	112	214	13.7	213	13.8	<u>213</u>	<u>13.8</u>									
657.xz_s	112	262	23.6	<u>262</u>	<u>23.6</u>	262	23.6									

SPECspeed2017_int_base = 9.15

SPECspeed2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
irqbalance disabled with "systemctl stop irqbalance"
tuned profile set with "tuned-adm profile throughput-performance"

General Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/cpu2017/lib/ia32:/cpu2017/lib/intel64:/cpu2017/je5.0.1-32:/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

Platform Notes

BIOS Configuration:
Intel Hyperthreading set to Disabled
Thermal Configuration set to Maximum Cooling
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Stale A to S set to Enabled
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Peak Frequency Compute

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_int_base = 9.15

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Platform Notes (Continued)

Energy/Performance Bias set to Maximum Performance
 Workload Profile set to Custom
 NUMA Group Size Optimization set to Flat
 Sysinfo program /cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on DL560-Gen10 Fri Nov 10 13:31:57 2017

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8180M CPU @ 2.50GHz
 4 "physical id"s (chips)
 112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 28
  siblings     : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 112
On-line CPU(s) list:   0-111
Thread(s) per core:    1
Core(s) per socket:    28
Socket(s):              4
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8180M CPU @ 2.50GHz
Stepping:               4
CPU MHz:                2500.000
BogoMIPS:               5007.34
Virtualization:        VT-x
L1d cache:              32K

```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_int_base = 9.15

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Platform Notes (Continued)

L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
NUMA node2 CPU(s): 56-83
NUMA node3 CPU(s): 84-111

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 196266 MB
node 0 free: 191204 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 196608 MB
node 1 free: 192271 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 2 size: 196608 MB
node 2 free: 192114 MB
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 196607 MB
node 3 free: 192189 MB
node distances:
node 0 1 2 3
0: 10 21 21 21
1: 21 10 21 21
2: 21 21 10 21
3: 21 21 21 10
```

```
From /proc/meminfo
MemTotal: 792066452 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_int_base = 9.15

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Platform Notes (Continued)

VERSION_ID="7.3"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:

Linux DL560-Gen10 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Nov 10 13:31

SPEC is set to: /cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1       xfs   447G   32G  416G   8% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 09/29/2017

Memory:

48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base)
657.xz_s(base)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
641.leela_s(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_int_base = 9.15

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

=====
FC 648.exchange2_s(base)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_int_base = 9.15

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-10 14:31:56-0500.

Report generated on 2018-10-31 17:12:16 by CPU2017 PDF formatter v6067.

Originally published on 2018-01-14.