



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 44.1

eterio 220 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_int_peak = 46.9

CPU2017 License: 9081


Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

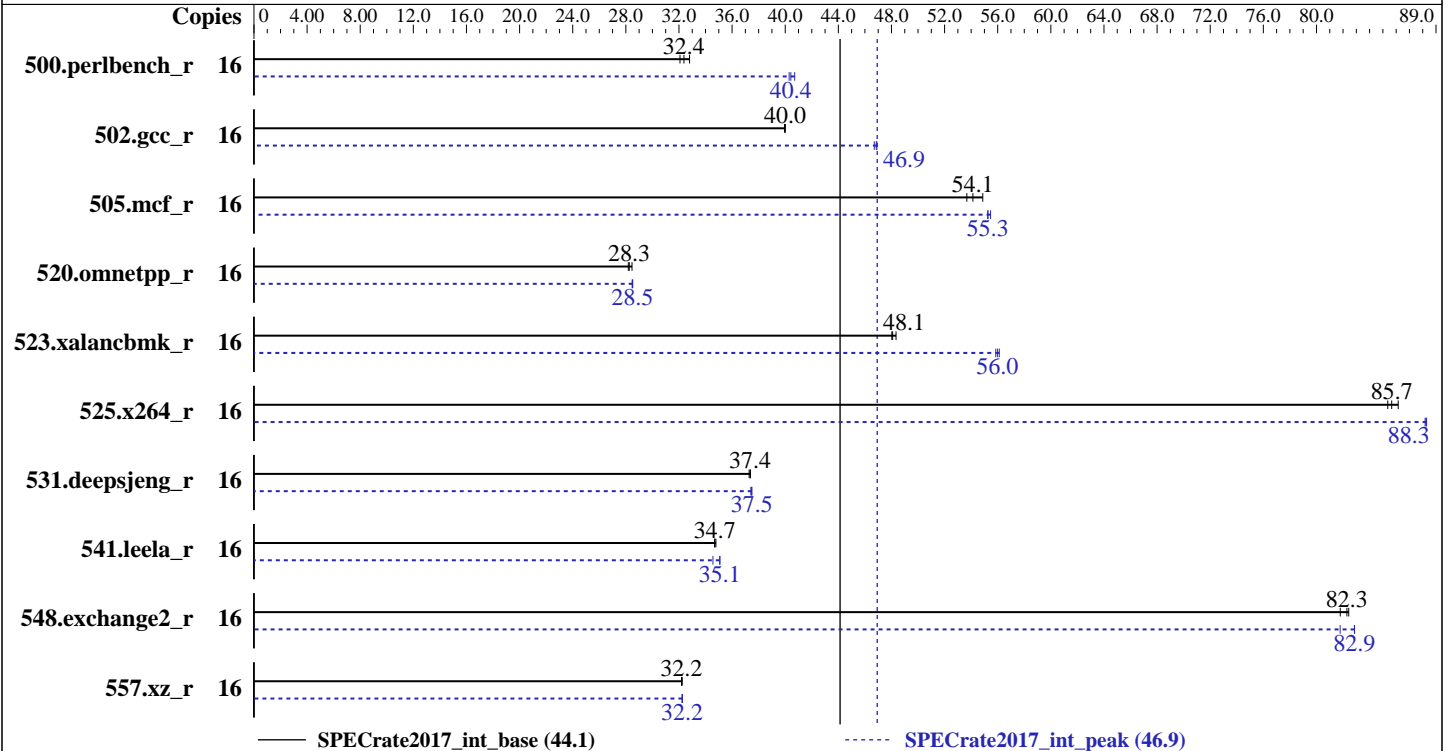

Hardware

CPU Name: Intel Xeon Silver 4112
 Max MHz.: 3000
 Nominal: 2600
 Enabled: 8 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 8.25 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R, running at 2400)
 Storage: 1 x 960 GB SSD SATA III
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3
 4.4.73-5-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version BIOSR0009 released Oct-2017
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator library V5.0.1;



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 44.1

eterio 220 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_int_peak = 46.9

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	777	32.8	<u>787</u>	<u>32.4</u>	794	32.1	16	626	40.7	<u>630</u>	<u>40.4</u>	632	40.3
502.gcc_r	16	567	39.9	<u>567</u>	<u>40.0</u>	566	40.0	16	483	46.9	<u>484</u>	<u>46.9</u>	485	46.7
505.mcf_r	16	471	54.9	482	53.7	<u>478</u>	<u>54.1</u>	16	<u>468</u>	<u>55.3</u>	466	55.5	468	55.3
520.omnetpp_r	16	737	28.5	<u>743</u>	<u>28.3</u>	745	28.2	16	736	28.5	<u>737</u>	<u>28.5</u>	737	28.5
523.xalancbmk_r	16	<u>351</u>	<u>48.1</u>	349	48.3	352	48.0	16	302	55.9	301	56.1	<u>302</u>	<u>56.0</u>
525.x264_r	16	<u>327</u>	<u>85.7</u>	328	85.4	325	86.2	16	317	88.3	<u>317</u>	<u>88.3</u>	318	88.2
531.deepsjeng_r	16	<u>491</u>	<u>37.4</u>	492	37.3	491	37.4	16	490	37.4	<u>489</u>	<u>37.5</u>	489	37.5
541.leela_r	16	<u>764</u>	<u>34.7</u>	764	34.7	762	34.8	16	755	35.1	767	34.6	<u>755</u>	<u>35.1</u>
548.exchange2_r	16	513	81.8	<u>509</u>	<u>82.3</u>	509	82.4	16	<u>506</u>	<u>82.9</u>	513	81.8	506	82.9
557.xz_r	16	<u>537</u>	<u>32.2</u>	537	32.2	536	32.2	16	<u>536</u>	<u>32.2</u>	536	32.3	536	32.2

SPECrate2017_int_base = 44.1

SPECrate2017_int_peak = 46.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH="/cpu2017.1.0.2/lib/ia32:/cpu2017.1.0.2/lib/intel64:/cpu2017.1.0.2/je5.0.1-32:/cpu2017.1.0.2/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32 GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 44.1

eterio 220 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_int_peak = 46.9

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc:

configured and built at default for 32bit (i686) and 64bit (x86_64) targets;

built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

sources available via jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Intel(R) Hyper-Threading Tech = Enabled

CPU Power and Performance Policy = Performance

Intel(R) Turbo Boost Technology = Enabled

ClE = Disabled

Processor C6 = Disabled

IMC Interleaving = Auto

Sub_NUMA Cluster = Disabled

Set FAN Profile = Performance

Patrol Scrub = Disabled

Sysinfo program /cpu2017.1.0.2/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-pz9d Fri Feb 2 14:11:48 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4112 CPU @ 2.60GHz

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 8

physical 0: cores 1 2 4 5

physical 1: cores 1 2 4 5

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 16

On-line CPU(s) list: 0-15

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 44.1

eterio 220 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_int_peak = 46.9

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Platform Notes (Continued)

```

Thread(s) per core:      2
Core(s) per socket:     4
Socket(s):               2
NUMA node(s):           2
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Silver 4112 CPU @ 2.60GHz
Stepping:                4
CPU MHz:                 2899.731
CPU max MHz:             3000.0000
CPU min MHz:             800.0000
BogoMIPS:                5188.05
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                8448K
NUMA node0 CPU(s):      0-3,8-11
NUMA node1 CPU(s):      4-7,12-15
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm hwp
hwp_act_window hwp_epp hwp_pkg_req intel_pt tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 8448 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 8 9 10 11
node 0 size: 192058 MB
node 0 free: 191738 MB
node 1 cpus: 4 5 6 7 12 13 14 15
node 1 size: 193382 MB
node 1 free: 193069 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 44.1

eterio 220 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_int_peak = 46.9

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      394691832 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/usr/bin/lsb_release -d

```
SUSE Linux Enterprise Server 12 SP3
```

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
```

```
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-pz9d 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Feb 2 14:08

SPEC is set to: /cpu2017.1.0.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  851G   20G  831G   3% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C620.86B.00.01.0009.101920170742 10/19/2017

Memory:

24x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 44.1

eterio 220 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_int_peak = 46.9

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
    525.x264_r(base, peak) 557.xz_r(base, peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
    541.leela_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
    541.leela_r(peak)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 44.1

eterio 220 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_int_peak = 46.9

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 44.1

eterio 220 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_int_peak = 46.9

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Base Other Flags (Continued)

Fortran benchmarks:

-m64

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 44.1

eterio 220 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_int_peak = 46.9

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk_r: -m32

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 44.1

eterio 220 RA1 (Intel Xeon Silver 4112, 2.60 GHz)

SPECrate2017_int_peak = 46.9

CPU2017 License: 9081

Test Date: Feb-2018

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Sep-2017

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Sep-2017

Peak Other Flags (Continued)

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Feb-2018-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Feb-2018-For-Intel-Platform.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-02-02 08:11:48-0500.

Report generated on 2018-10-31 17:10:52 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-29.