



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6144, 3.50 GHz)

SPECrate2017_int_base = 94.0

SPECrate2017_int_peak = 96.8

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

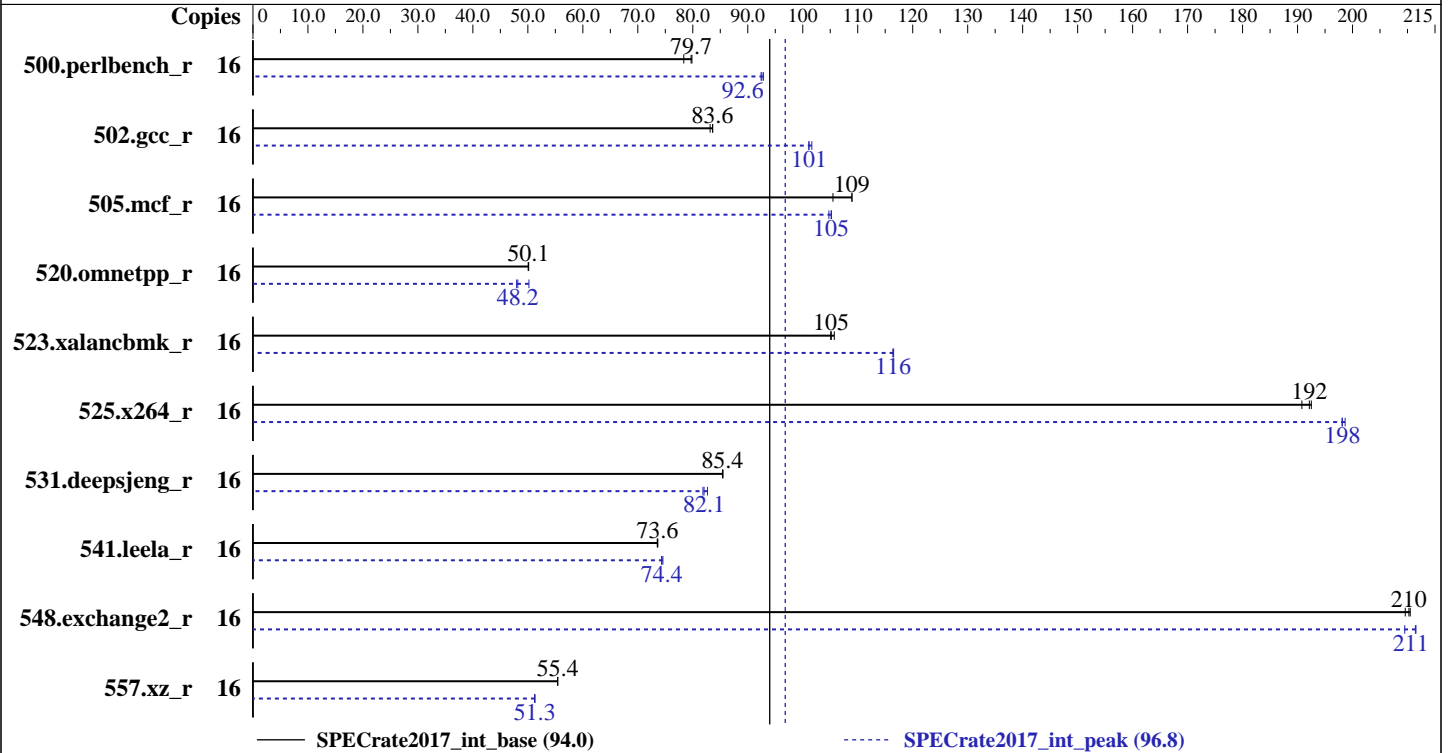

Hardware

CPU Name: Intel Xeon Gold 6144
 Max MHz.: 4200
 Nominal: 3500
 Enabled: 16 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 TB SATA 7200 RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64) 4.4.114-94.11-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 1.3.7 released Feb-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator library, version 5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6144, 3.50 GHz)

SPECrate2017_int_base = 94.0

SPECrate2017_int_peak = 96.8

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2018
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	319	79.8	<u>320</u>	<u>79.7</u>	325	78.4	16	274	92.9	<u>275</u>	<u>92.6</u>	276	92.4
502.gcc_r	16	271	83.6	<u>271</u>	<u>83.6</u>	272	83.2	16	223	102	<u>224</u>	<u>101</u>	224	101
505.mcf_r	16	<u>237</u>	<u>109</u>	237	109	245	105	16	246	105	<u>246</u>	<u>105</u>	247	105
520.omnetpp_r	16	<u>419</u>	<u>50.1</u>	419	50.1	419	50.2	16	418	50.2	438	48.0	<u>436</u>	<u>48.2</u>
523.xalancbmk_r	16	160	106	161	105	<u>161</u>	<u>105</u>	16	<u>145</u>	<u>116</u>	145	116	145	117
525.x264_r	16	<u>146</u>	<u>192</u>	146	193	147	191	16	141	199	<u>141</u>	<u>198</u>	141	198
531.deepsjeng_r	16	215	85.5	<u>215</u>	<u>85.4</u>	215	85.4	16	222	82.7	224	81.8	<u>223</u>	<u>82.1</u>
541.leela_r	16	360	73.6	<u>360</u>	<u>73.6</u>	360	73.5	16	355	74.6	356	74.4	<u>356</u>	<u>74.4</u>
548.exchange2_r	16	199	210	200	210	<u>199</u>	<u>210</u>	16	200	209	<u>198</u>	<u>211</u>	198	212
557.xz_r	16	312	55.4	<u>312</u>	<u>55.4</u>	312	55.4	16	<u>337</u>	<u>51.3</u>	337	51.2	337	51.3

SPECrate2017_int_base = 94.0

SPECrate2017_int_peak = 96.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets; jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available via jemalloc.net

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6144,
3.50 GHz)

SPECrate2017_int_base = 94.0

SPECrate2017_int_peak = 96.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1EE disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-jfqv Thu Mar 1 11:03:46 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6144 CPU @ 3.50GHz

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 8

physical 0: cores 0 2 3 9 16 19 26 27

physical 1: cores 0 2 3 9 16 19 26 27

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 16

On-line CPU(s) list: 0-15

Thread(s) per core: 1

Core(s) per socket: 8

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6144, 3.50 GHz)

SPECrate2017_int_base = 94.0

SPECrate2017_int_peak = 96.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

```

Socket(s):                2
NUMA node(s):             4
Vendor ID:                GenuineIntel
CPU family:               6
Model:                   85
Model name:               Intel(R) Xeon(R) Gold 6144 CPU @ 3.50GHz
Stepping:                 4
CPU MHz:                  3491.794
BogoMIPS:                 6983.58
Virtualization:          VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                 1024K
L3 cache:                 25344K
NUMA node0 CPU(s):       0,4,8,12
NUMA node1 CPU(s):       1,5,9,13
NUMA node2 CPU(s):       2,6,10,14
NUMA node3 CPU(s):       3,7,11,15

```

```

Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12
node 0 size: 46978 MB
node 0 free: 46797 MB
node 1 cpus: 1 5 9 13
node 1 size: 48376 MB
node 1 free: 48204 MB
node 2 cpus: 2 6 10 14
node 2 size: 48376 MB
node 2 free: 48218 MB
node 3 cpus: 3 7 11 15
node 3 size: 48373 MB
node 3 free: 48226 MB

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6144,
3.50 GHz)

SPECrate2017_int_base = 94.0

SPECrate2017_int_peak = 96.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

node distances:

node	0	1	2	3
0:	10	21	11	21
1:	21	10	21	11
2:	11	21	10	21
3:	21	11	21	10

From /proc/meminfo

```
MemTotal:      196714988 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
```

```
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-jfqv 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 1 11:01

SPEC is set to: /root/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	928G	25G	903G	3%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.3.7 02/09/2018

Memory:

```
12x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666
4x Not Specified Not Specified
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6144,
3.50 GHz)

SPECrate2017_int_base = 94.0

SPECrate2017_int_peak = 96.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
   525.x264_r(base, peak) 557.xz_r(base, peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
     541.leela_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalanbmk_r(peak) 531.deepsjeng_r(peak)
     541.leela_r(peak)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6144,
3.50 GHz)

SPECrate2017_int_base = 94.0

SPECrate2017_int_peak = 96.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6144,
3.50 GHz)

SPECrate2017_int_base = 94.0

SPECrate2017_int_peak = 96.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6144,
3.50 GHz)

SPECrate2017_int_base = 94.0

SPECrate2017_int_peak = 96.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib

-ljemalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -fno-alias

-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6144,
3.50 GHz)

SPECrate2017_int_base = 94.0

SPECrate2017_int_peak = 96.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Other Flags (Continued)

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-03-01 12:03:46-0500.

Report generated on 2018-10-31 17:07:15 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-20.