



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 187

Huawei 5288 V5 (Intel Xeon Gold 6140)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

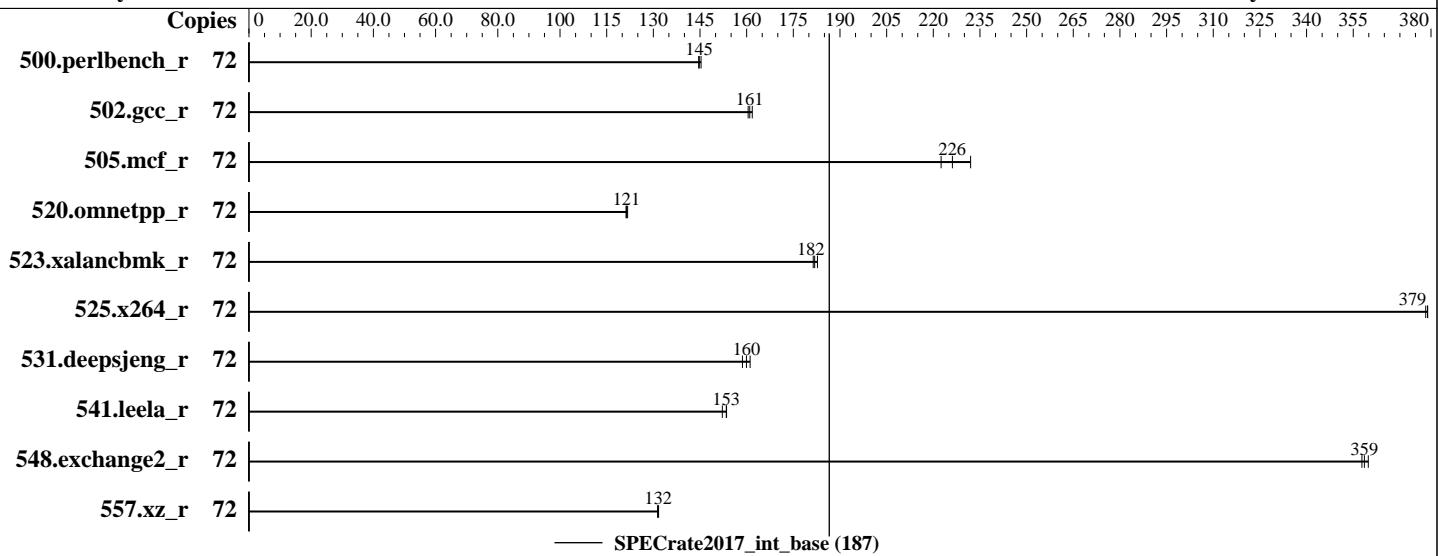

## Hardware

CPU Name: Intel Xeon Gold 6140  
Max MHz.: 3700  
Nominal: 2300  
Enabled: 36 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 24.75 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
Storage: 1 x 1200 GB SAS, 10000 RPM  
Other: None

## Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
Compiler: 3.10.0-693.11.6.el7.x86\_64  
C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Version 0.62 Released Apr-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc: jemalloc memory allocator library V5.0.1;



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 187

Huawei 5288 V5 (Intel Xeon Gold 6140)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	72	793	145	<b>792</b>	<b>145</b>	789	145									
502.gcc_r	72	630	162	<b>633</b>	<b>161</b>	635	160									
505.mcf_r	72	502	232	523	223	<b>515</b>	<b>226</b>									
520.omnetpp_r	72	776	122	<b>778</b>	<b>121</b>	779	121									
523.xalancbmk_r	72	416	183	<b>418</b>	<b>182</b>	419	181									
525.x264_r	72	<b>333</b>	<b>379</b>	333	378	333	379									
531.deepsjeng_r	72	512	161	520	159	<b>516</b>	<b>160</b>									
541.leela_r	72	784	152	<b>777</b>	<b>153</b>	777	154									
548.exchange2_r	72	<b>526</b>	<b>359</b>	527	358	524	360									
557.xz_r	72	591	132	<b>591</b>	<b>132</b>	592	131									

SPECrate2017\_int\_base = 187

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for

32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 187

Huawei 5288 V5 (Intel Xeon Gold 6140)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC Interleaving Set to 1-way Interleave

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on localhost.localdomain Tue May 15 17:04:56 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz

2 "physical id"s (chips)

72 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 36

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 72

On-line CPU(s) list: 0-71

Thread(s) per core: 2

Core(s) per socket: 18

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Huawei**

**SPECrate2017\_int\_base = 187**

**Huawei 5288 V5 (Intel Xeon Gold 6140)**

**SPECrate2017\_int\_peak = Not Run**

**CPU2017 License:** 3175

**Test Date:** May-2018

**Test Sponsor:** Huawei

**Hardware Availability:** Jul-2017

**Tested by:** Huawei

**Software Availability:** Jan-2018

## Platform Notes (Continued)

```

Model: 85
Model name: Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz
Stepping: 4
CPU MHz: 2300.000
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-2,5,6,9,10,14,15,36-38,41,42,45,46,50,51
NUMA node1 CPU(s): 3,4,7,8,11-13,16,17,39,40,43,44,47-49,52,53
NUMA node2 CPU(s): 18-20,23,24,27,28,32,33,54-56,59,60,63,64,68,69
NUMA node3 CPU(s): 21,22,25,26,29-31,34,35,57,58,61,62,65-67,70,71
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 fma cx16 xtpr
pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
f16c rdrand lahf_lm abm 3dnowprefetch epb cat_13 cdp_13 invpcid_single intel_pt
spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmil hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq rdseed adx
smmap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc
cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln pts

```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 9 10 14 15 36 37 38 41 42 45 46 50 51
node 0 size: 96437 MB
node 0 free: 93158 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 39 40 43 44 47 48 49 52 53
node 1 size: 98304 MB
node 1 free: 95420 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 54 55 56 59 60 63 64 68 69
node 2 size: 98304 MB
node 2 free: 95466 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 57 58 61 62 65 66 67 70 71
node 3 size: 98304 MB
node 3 free: 94937 MB
node distances:
node    0    1    2    3
      0: 10   11   21   21
      1: 11   10   21   21

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 187

Huawei 5288 V5 (Intel Xeon Gold 6140)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Platform Notes (Continued)

```
2: 21 21 10 11  
3: 21 21 11 10
```

```
From /proc/meminfo  
MemTotal:      394174812 kB  
HugePages_Total:       0  
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux Server"  
  VERSION="7.4 (Maipo)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VARIANT="Server"  
  VARIANT_ID="server"  
  VERSION_ID="7.4"  
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"  
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:  
Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST  
2017 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 14 20:28
```

```
SPEC is set to: /spec2017  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda2        xfs   781G   31G   751G   4%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.62 04/03/2018

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 187

Huawei 5288 V5 (Intel Xeon Gold 6140)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Compiler Version Notes (Continued)

557.xz\_r(base)

```
-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
541.leela_r(base)  
=====
```

```
-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
FC 548.exchange2_r(base)  
=====
```

```
-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 187

Huawei 5288 V5 (Intel Xeon Gold 6140)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Base Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -fno-standard-realloc-lhs -falign array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 187

Huawei 5288 V5 (Intel Xeon Gold 6140)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-05-15 17:04:55-0400.

Report generated on 2018-10-31 17:59:21 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-12.