



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 221

Huawei XH321 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = 236

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

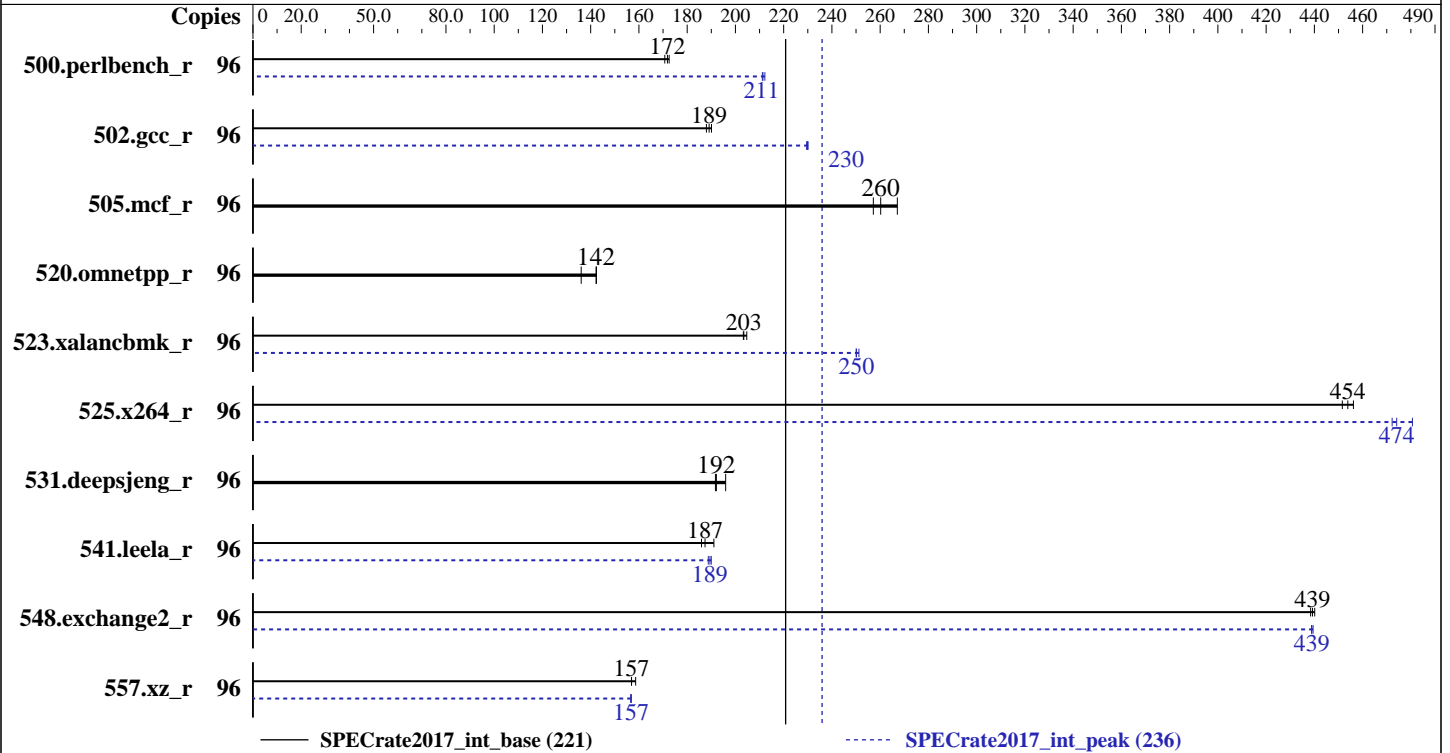

Hardware

CPU Name: Intel Xeon Platinum 8160
 Max MHz.: 3700
 Nominal: 2100
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 33 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 1200 GB SAS, 10000 RPM
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 0.59 Released Feb-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library V5.0.1;



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 221

Huawei XH321 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = 236

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|------------|------------|------------|------------|------------|------------|--------|---------|-------|------------|------------|------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 96 | 886 | 173 | 889 | 172 | 895 | 171 | 96 | 720 | 212 | 724 | 211 | 723 | 211 |
| 502.gcc_r | 96 | 715 | 190 | 719 | 189 | 723 | 188 | 96 | 592 | 230 | 591 | 230 | 591 | 230 |
| 505.mcf_r | 96 | 581 | 267 | 596 | 260 | 603 | 257 | 96 | 581 | 267 | 596 | 260 | 603 | 257 |
| 520.omnetpp_r | 96 | 885 | 142 | 886 | 142 | 926 | 136 | 96 | 885 | 142 | 886 | 142 | 926 | 136 |
| 523.xalancbmk_r | 96 | 495 | 205 | 498 | 203 | 499 | 203 | 96 | 405 | 250 | 405 | 250 | 404 | 251 |
| 525.x264_r | 96 | 368 | 456 | 372 | 452 | 370 | 454 | 96 | 350 | 481 | 355 | 474 | 356 | 472 |
| 531.deepsjeng_r | 96 | 561 | 196 | 573 | 192 | 574 | 192 | 96 | 561 | 196 | 573 | 192 | 574 | 192 |
| 541.leela_r | 96 | 832 | 191 | 848 | 187 | 855 | 186 | 96 | 837 | 190 | 842 | 189 | 839 | 189 |
| 548.exchange2_r | 96 | 573 | 439 | 571 | 440 | 574 | 438 | 96 | 572 | 439 | 573 | 439 | 573 | 439 |
| 557.xz_r | 96 | 654 | 159 | 661 | 157 | 661 | 157 | 96 | 661 | 157 | 662 | 157 | 661 | 157 |

SPECrate2017_int_base = 221

SPECrate2017_int_peak = 236

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec/lib/ia32:/spec/lib/intel64:/spec/je5.0.1-32:/spec/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc: configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4,
and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 221

Huawei XH321 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = 236

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC Interleaving Set to 1-way Interleave

XPT Prefetch Set to Enabled

ADDDC Sparing Set to Disabled

Sysinfo program /spec/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on localhost.localdomain Fri May 25 11:03:42 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

On-line CPU(s) list: 0-95

Thread(s) per core: 2

Core(s) per socket: 24

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 221

Huawei XH321 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = 236

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Platform Notes (Continued)

```

CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
Stepping:             4
CPU MHz:              2100.000
BogoMIPS:             4204.54
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             33792K
NUMA node0 CPU(s):   0-2,6-8,12-14,18-20,48-50,54-56,60-62,66-68
NUMA node1 CPU(s):   3-5,9-11,15-17,21-23,51-53,57-59,63-65,69-71
NUMA node2 CPU(s):   24-26,30-32,36-38,42-44,72-74,78-80,84-86,90-92
NUMA node3 CPU(s):   27-29,33-35,39-41,45-47,75-77,81-83,87-89,93-95

```

```
/proc/cpuinfo cache data
cache size : 33792 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 48 49 50 54 55 56 60 61 62 66 67 68
node 0 size: 96437 MB
node 0 free: 93108 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 51 52 53 57 58 59 63 64 65 69 70 71
node 1 size: 98304 MB
node 1 free: 95881 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 72 73 74 78 79 80 84 85 86 90 91 92
node 2 size: 98304 MB
node 2 free: 96024 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 75 76 77 81 82 83 87 88 89 93 94 95
node 3 size: 98304 MB
node 3 free: 95944 MB
node distances:
node  0  1  2  3
0:  10  11  21  21
1:  11  10  21  21
2:  21  21  10  11
3:  21  21  11  10

```

```

From /proc/meminfo
MemTotal:      394174484 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```
From /etc/*release* /etc/*version*
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 221

Huawei XH321 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = 236

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Platform Notes (Continued)

```

os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.3 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.3"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST
2017 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 May 25 10:24

```

SPEC is set to: /spec
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda8        xfs       325G      29G   297G   9% /

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

BIOS INSYDE Corp. 0.59 02/24/2018
Memory:
  4x NO DIMM NO DIMM
  12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
   525.x264_r(base, peak) 557.xz_r(base, peak)
-----

```

```

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

```

```

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 221

Huawei XH321 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = 236

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Compiler Version Notes (Continued)

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 221

Huawei XH321 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = 236

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Base Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 221

Huawei XH321 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = 236

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 221

Huawei XH321 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = 236

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Peak Optimization Flags (Continued)

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):

```
-m64
```

523.xalancbmk_r: -m32

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 221

Huawei XH321 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = 236

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-05-25 11:03:41-0400.

Report generated on 2018-10-31 17:52:48 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-12.