



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 904

Huawei 9008 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = Not Run

CPU2017 License: 3175


Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2018

Tested by: Huawei

Software Availability: Mar-2018

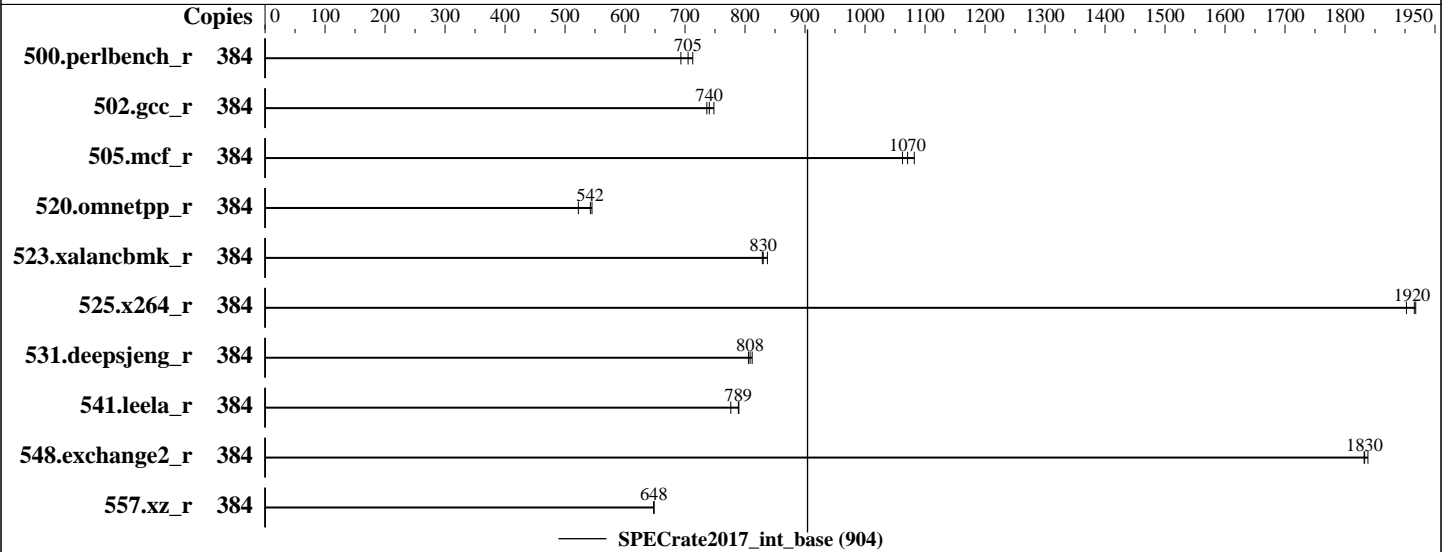

Hardware

CPU Name: Intel Xeon Platinum 8160
 Max MHz.: 3700
 Nominal: 2100
 Enabled: 192 cores, 8 chips, 2 threads/core
 Orderable: 2,4,6,8 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 33 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 2 x 900 GB SAS HDD 10K RPM, RAID 1
 Other: None

Software

OS: SUSE Linux Enterprise Server for SAP Applications
 12 SP2
 4.4.120-92.70-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 0.80 released Feb-2018
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 904

Huawei 9008 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2018
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	882	693	<u>867</u>	<u>705</u>	858	713							
502.gcc_r	384	738	736	727	748	<u>734</u>	<u>740</u>							
505.mcf_r	384	573	1080	<u>579</u>	<u>1070</u>	584	1060							
520.omnetpp_r	384	925	545	<u>929</u>	<u>542</u>	965	522							
523.xalancbmk_r	384	484	837	<u>488</u>	<u>830</u>	489	829							
525.x264_r	384	<u>351</u>	<u>1920</u>	353	1900	351	1920							
531.deepsjeng_r	384	542	812	<u>544</u>	<u>808</u>	546	806							
541.leela_r	384	819	776	<u>806</u>	<u>789</u>	805	790							
548.exchange2_r	384	547	1840	<u>549</u>	<u>1830</u>	549	1830							
557.xz_r	384	640	648	<u>640</u>	<u>648</u>	640	648							

SPECrate2017_int_base = 904

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4,

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 904

Huawei 9008 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2018
Software Availability: Mar-2018

General Notes (Continued)

and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>;
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Sub NUMA Cluster (SNC) set to enabled
IMC (Integrated memory controller) Interleaving set to 1 way interleave
Xtended Prediction Table (XPT) Prefetch set to Enable
Memory Patrol Scrub set to Disable
Last Level Cache (LLC) Prefetch set to Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-6n7q Fri Jun 1 02:37:42 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
8 "physical id"s (chips)
384 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 904

Huawei 9008 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2018
Software Availability: Mar-2018

Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    384
On-line CPU(s) list:      0-383
Thread(s) per core:       2
Core(s) per socket:      24
Socket(s):                 8
NUMA node(s):             16
Vendor ID:                 GenuineIntel
CPU family:                6
Model:                     85
Model name:                Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
Stepping:                  4
CPU MHz:                   2100.026
BogoMIPS:                  4200.05
Virtualization:           VT-x
L1d cache:                 32K
L1i cache:                 32K
L2 cache:                  1024K
L3 cache:                  33792K
NUMA node0 CPU(s):        0-2,6-8,12-14,18-20,192-194,198-200,204-206,210-212
NUMA node1 CPU(s):        3-5,9-11,15-17,21-23,195-197,201-203,207-209,213-215
NUMA node2 CPU(s):        24-26,30-32,36-38,42-44,216-218,222-224,228-230,234-236
NUMA node3 CPU(s):        27-29,33-35,39-41,45-47,219-221,225-227,231-233,237-239
NUMA node4 CPU(s):        48-50,54-56,60-62,66-68,240-242,246-248,252-254,258-260
NUMA node5 CPU(s):        51-53,57-59,63-65,69-71,243-245,249-251,255-257,261-263
NUMA node6 CPU(s):        72-74,78-80,84-86,90-92,264-266,270-272,276-278,282-284
NUMA node7 CPU(s):        75-77,81-83,87-89,93-95,267-269,273-275,279-281,285-287
NUMA node8 CPU(s):        96-98,102-104,108-110,114-116,288-290,294-296,300-302,306-308
NUMA node9 CPU(s):        99-101,105-107,111-113,117-119,291-293,297-299,303-305,309-311
NUMA node10 CPU(s):       120-122,126-128,132-134,138-140,312-314,318-320,324-326,330-332
NUMA node11 CPU(s):       123-125,129-131,135-137,141-143,315-317,321-323,327-329,333-335
NUMA node12 CPU(s):       144-146,150-152,156-158,162-164,336-338,342-344,348-350,354-356
NUMA node13 CPU(s):       147-149,153-155,159-161,165-167,339-341,345-347,351-353,357-359
NUMA node14 CPU(s):       168-170,174-176,180-182,186-188,360-362,366-368,372-374,378-380
NUMA node15 CPU(s):       171-173,177-179,183-185,189-191,363-365,369-371,375-377,381-383
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pbs rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 904

Huawei 9008 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2018
Software Availability: Mar-2018

Platform Notes (Continued)

avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```
/proc/cpuinfo cache data
cache size : 33792 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 192 193 194 198 199 200 204 205 206 210 211
212
node 0 size: 94994 MB
node 0 free: 94596 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 195 196 197 201 202 203 207 208 209 213
214 215
node 1 size: 96762 MB
node 1 free: 96559 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 216 217 218 222 223 224 228 229 230
234 235 236
node 2 size: 96762 MB
node 2 free: 96565 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 219 220 221 225 226 227 231 232 233
237 238 239
node 3 size: 96762 MB
node 3 free: 96542 MB
node 4 cpus: 48 49 50 54 55 56 60 61 62 66 67 68 240 241 242 246 247 248 252 253 254
258 259 260
node 4 size: 96762 MB
node 4 free: 96591 MB
node 5 cpus: 51 52 53 57 58 59 63 64 65 69 70 71 243 244 245 249 250 251 255 256 257
261 262 263
node 5 size: 96762 MB
node 5 free: 96601 MB
node 6 cpus: 72 73 74 78 79 80 84 85 86 90 91 92 264 265 266 270 271 272 276 277 278
282 283 284
node 6 size: 96762 MB
node 6 free: 96573 MB
node 7 cpus: 75 76 77 81 82 83 87 88 89 93 94 95 267 268 269 273 274 275 279 280 281
285 286 287
node 7 size: 96762 MB
node 7 free: 96597 MB
node 8 cpus: 96 97 98 102 103 104 108 109 110 114 115 116 288 289 290 294 295 296 300
301 302 306 307 308
node 8 size: 96762 MB
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 904

Huawei 9008 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2018
Software Availability: Mar-2018

Platform Notes (Continued)

```

node 8 free: 96309 MB
node 9 cpus: 99 100 101 105 106 107 111 112 113 117 118 119 291 292 293 297 298 299 303
304 305 309 310 311
node 9 size: 96762 MB
node 9 free: 96595 MB
node 10 cpus: 120 121 122 126 127 128 132 133 134 138 139 140 312 313 314 318 319 320
324 325 326 330 331 332
node 10 size: 96762 MB
node 10 free: 96454 MB
node 11 cpus: 123 124 125 129 130 131 135 136 137 141 142 143 315 316 317 321 322 323
327 328 329 333 334 335
node 11 size: 96762 MB
node 11 free: 96559 MB
node 12 cpus: 144 145 146 150 151 152 156 157 158 162 163 164 336 337 338 342 343 344
348 349 350 354 355 356
node 12 size: 96762 MB
node 12 free: 96561 MB
node 13 cpus: 147 148 149 153 154 155 159 160 161 165 166 167 339 340 341 345 346 347
351 352 353 357 358 359
node 13 size: 96762 MB
node 13 free: 96502 MB
node 14 cpus: 168 169 170 174 175 176 180 181 182 186 187 188 360 361 362 366 367 368
372 373 374 378 379 380
node 14 size: 96762 MB
node 14 free: 96578 MB
node 15 cpus: 171 172 173 177 178 179 183 184 185 189 190 191 363 364 365 369 370 371
375 376 377 381 382 383
node 15 size: 96605 MB
node 15 free: 96451 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
0: 10 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20
1: 20 10 20 20 20 20 20 20 20 20 20 20 20 20 20 20
2: 20 20 10 20 20 20 20 20 20 20 20 20 20 20 20 20
3: 20 20 20 10 20 20 20 20 20 20 20 20 20 20 20 20
4: 20 20 20 20 10 20 20 20 20 20 20 20 20 20 20 20
5: 20 20 20 20 20 10 20 20 20 20 20 20 20 20 20 20
6: 20 20 20 20 20 20 10 20 20 20 20 20 20 20 20 20
7: 20 20 20 20 20 20 20 10 20 20 20 20 20 20 20 20
8: 20 20 20 20 20 20 20 20 10 20 20 20 20 20 20 20
9: 20 20 20 20 20 20 20 20 20 10 20 20 20 20 20 20
10: 20 20 20 20 20 20 20 20 20 20 10 20 20 20 20 20
11: 20 20 20 20 20 20 20 20 20 20 20 10 20 20 20 20
12: 20 20 20 20 20 20 20 20 20 20 20 20 10 20 20 20
13: 20 20 20 20 20 20 20 20 20 20 20 20 20 10 20 20
14: 20 20 20 20 20 20 20 20 20 20 20 20 20 20 10 20
15: 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 10

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 904

Huawei 9008 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2018
Software Availability: Mar-2018

Platform Notes (Continued)

```

From /proc/meminfo
  MemTotal:      1583378316 kB
  HugePages_Total:      0
  Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server for SAP Applications 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES_SAP"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server for SAP Applications 12 SP2"
  ID="sles_sap"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles_sap:12:sp2"

uname -a:
  Linux linux-6n7q 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
  x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Jun 1 02:24

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       ext4  745G  17G  728G   3% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS INSYDE Corp. 0.80 02/24/2018
  Memory:
    48x NO DIMM NO DIMM
    48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 904

Huawei 9008 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2018
Software Availability: Mar-2018

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 904

Huawei 9008 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2018
Software Availability: Mar-2018

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 904

Huawei 9008 V5 (Intel Xeon Platinum 8160)

SPECrate2017_int_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Jun-2018

Hardware Availability: Jul-2018

Software Availability: Mar-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-01 02:37:40-0400.

Report generated on 2018-10-31 17:21:12 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.