



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 88.0

PowerEdge R740 (Intel Xeon Gold 6137, 3.90GHz)

SPECspeed2017_fp_peak = 84.0

CPU2017 License: 55


Test Date: Jun-2018

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

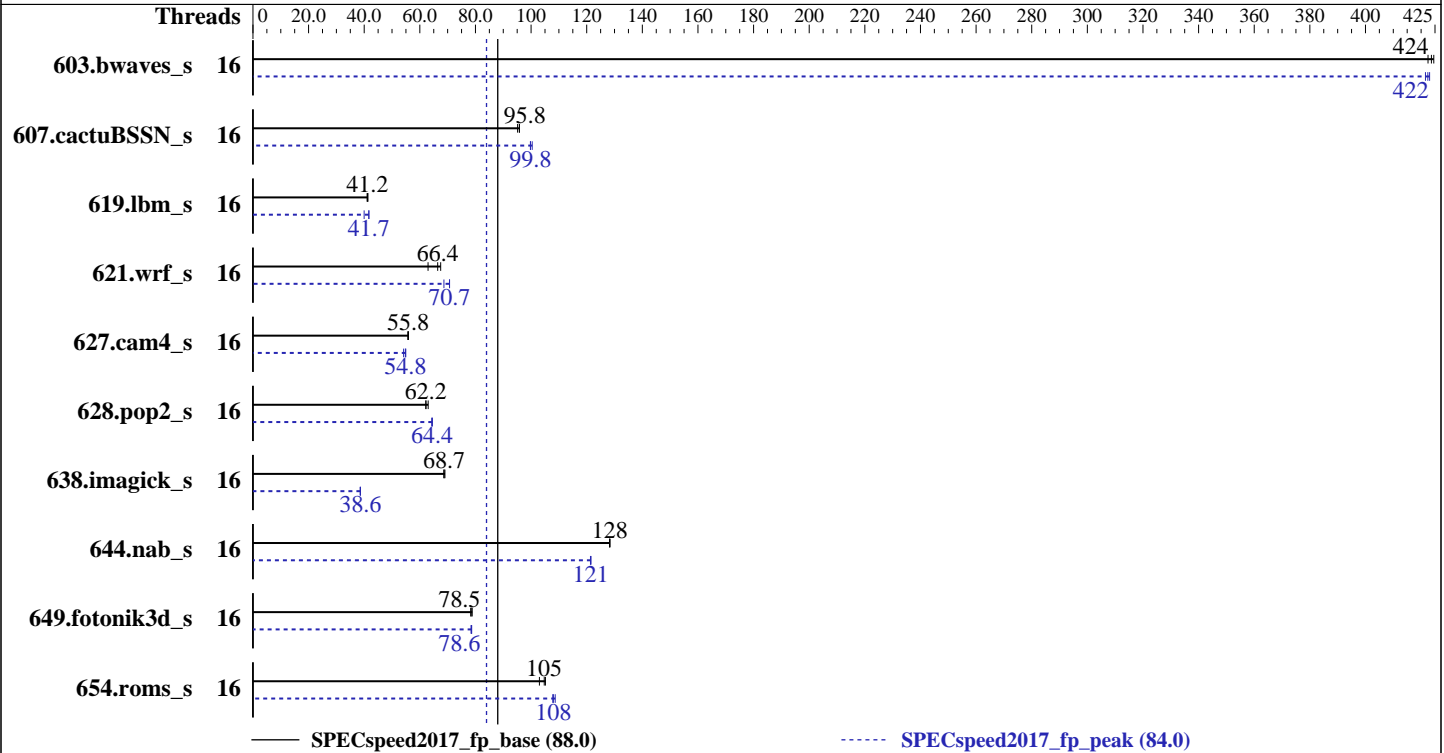

Hardware

CPU Name: Intel Xeon Gold 6137
 Max MHz.: 4100
 Nominal: 3900
 Enabled: 16 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2
 kernel 4.4.126-94.22-default
 Compiler: C/C++: Version 18.0.2.20180210 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.20180210 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Version 1.4.5 released May-2018 tested as Mar-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed2017_fp_base = 88.0

PowerEdge R740 (Intel Xeon Gold 6137, 3.90GHz)

SPECSpeed2017_fp_peak = 84.0

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2018
Hardware Availability: Jun-2018
Software Availability: Apr-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	139	425	140	422	139	424	16	140	422	139	423	140	422
607.cactuBSSN_s	16	174	95.8	175	95.1	174	95.8	16	166	100	167	99.8	167	99.8
619.lbm_s	16	127	41.2	128	41.0	127	41.3	16	131	40.0	126	41.7	126	41.7
621.wrf_s	16	210	63.0	196	67.5	199	66.4	16	193	68.7	187	70.7	187	70.7
627.cam4_s	16	159	55.7	159	55.8	159	55.9	16	162	54.8	161	54.9	164	54.2
628.pop2_s	16	191	62.2	188	63.0	191	62.2	16	184	64.5	185	64.3	184	64.4
638.imagick_s	16	209	69.0	210	68.7	210	68.7	16	374	38.6	373	38.6	374	38.6
644.nab_s	16	136	128	136	128	136	128	16	144	121	144	122	144	121
649.fotonik3d_s	16	116	78.5	116	78.3	116	78.8	16	116	78.6	116	78.6	116	78.4
654.roms_s	16	153	103	150	105	150	105	16	146	108	146	108	145	109

SPECSpeed2017_fp_base = 88.0

SPECSpeed2017_fp_peak = 84.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Platform Notes

BIOS settings:

Sub NUMA Cluster disabled

Virtualization Technology disabled

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 88.0

PowerEdge R740 (Intel Xeon Gold 6137, 3.90GHz)

SPECspeed2017_fp_peak = 84.0

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Apr-2018

Platform Notes (Continued)

System Profile set to Custom
 CPU Performance set to Maximum Performance
 C States set to Autonomous
 C1E disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Performance
 Memory Patrol Scrub disabled
 Logical Processor disabled
 CPU Interconnect Bus Link Power Management disabled
 PCI ASPM L1 Link Power Management disabled
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-wwko Thu Jun 14 15:50:42 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6137 CPU @ 3.90GHz

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 8

physical 0: cores 0 2 3 9 16 19 26 27

physical 1: cores 0 2 3 9 16 19 26 27

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 16

On-line CPU(s) list: 0-15

Thread(s) per core: 1

Core(s) per socket: 8

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 6137 CPU @ 3.90GHz

Stepping: 4

CPU MHz: 3890.831

BogoMIPS: 7781.66

Virtualization: VT-x

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 88.0

PowerEdge R740 (Intel Xeon Gold 6137, 3.90GHz)

SPECspeed2017_fp_peak = 84.0

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2018
Hardware Availability: Jun-2018
Software Availability: Apr-2018

Platform Notes (Continued)

```

L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           25344K
NUMA node0 CPU(s):  0,2,4,6,8,10,12,14
NUMA node1 CPU(s):  1,3,5,7,9,11,13,15
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14
node 0 size: 192048 MB
node 0 free: 186882 MB
node 1 cpus: 1 3 5 7 9 11 13 15
node 1 size: 193370 MB
node 1 free: 190688 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

```

From /proc/meminfo
MemTotal:          394669984 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 88.0

PowerEdge R740 (Intel Xeon Gold 6137, 3.90GHz)

SPECspeed2017_fp_peak = 84.0

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Apr-2018

Platform Notes (Continued)

This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-wwko 4.4.126-94.22-default #1 SMP Wed Apr 11 07:45:03 UTC 2018 (9649989)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

run-level 3 Jun 14 11:01

SPEC is set to: /home/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 xfs 892G 167G 725G 19% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.4.5 03/30/2018

Memory:

```
20x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
4x 00AD063200AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 88.0

PowerEdge R740 (Intel Xeon Gold 6137, 3.90GHz)

SPECspeed2017_fp_peak = 84.0

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Apr-2018

Compiler Version Notes (Continued)

=====
CC 619.lbm_s(peak) 638.imagick_s(peak) 644.nab_s(peak)

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(base)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 88.0

PowerEdge R740 (Intel Xeon Gold 6137, 3.90GHz)

SPECspeed2017_fp_peak = 84.0

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Apr-2018

Compiler Version Notes (Continued)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

CC 621.wrf_s(peak) 627.cam4_s(peak) 628.pop2_s(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 88.0

PowerEdge R740 (Intel Xeon Gold 6137, 3.90GHz)

SPECspeed2017_fp_peak = 84.0

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Apr-2018

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 88.0

PowerEdge R740 (Intel Xeon Gold 6137, 3.90GHz)

SPECspeed2017_fp_peak = 84.0

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Apr-2018

Peak Optimization Flags

C benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch  
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch  
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch  
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-06-14 16:50:41-0400.

Report generated on 2018-10-31 18:51:30 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-10.