



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10


(2.40 GHz, AMD EPYC 7351)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2018
Hardware Availability: May-2018
Software Availability: May-2018

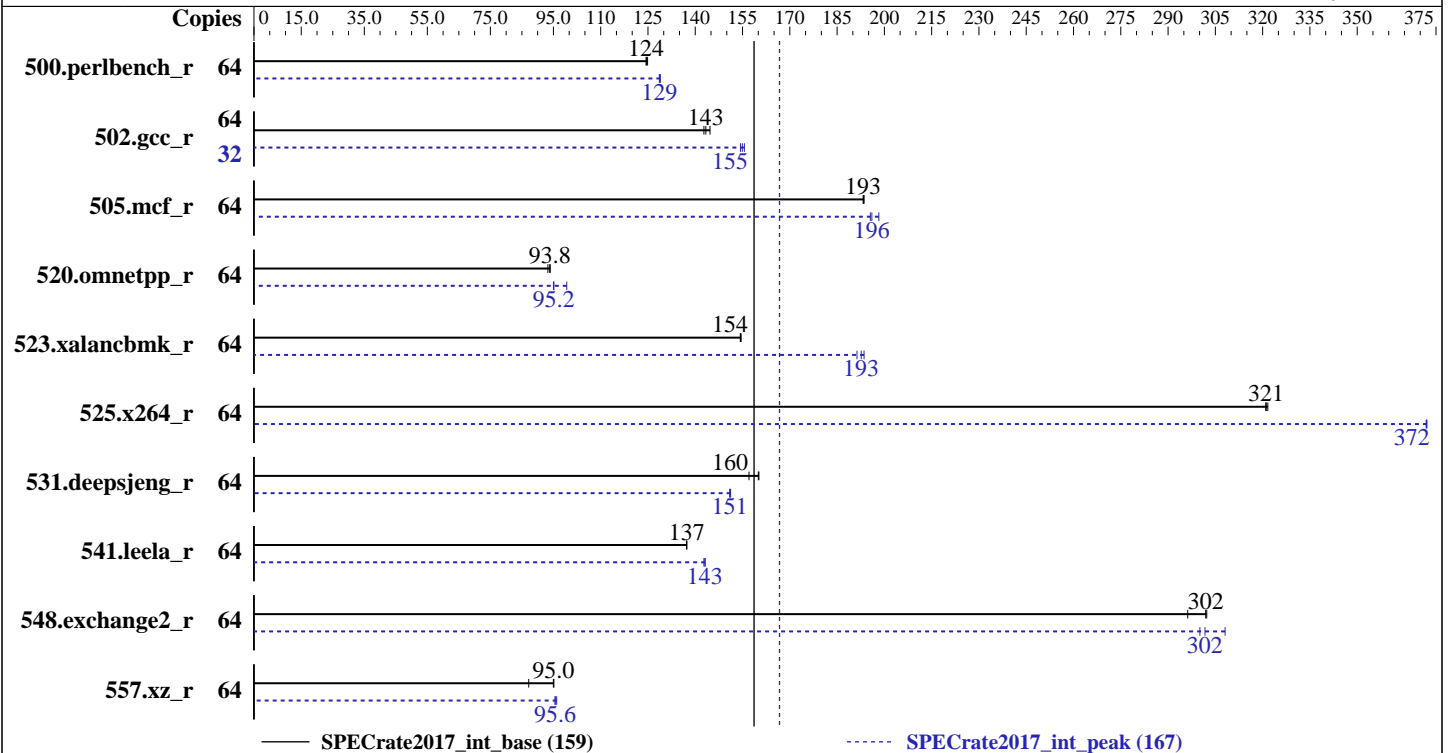

Hardware

CPU Name: AMD EPYC 7351
 Max MHz.: 2900
 Nominal: 2400
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 8 MB shared / 2 cores
 Other: None
 Memory: 256 GB (16 x 16 GB 1Rx4 PC4-2666V-R)
 Storage: 1 x 480 GB SATA SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP3
 Kernel 4.4.131-94.25-default
 Compiler: C/C++: Version 1.0.0 of AOCC
 Fortran: Version 4.8.2 of GCC
 Parallel: No
 Firmware: HPE BIOS Version A40 04/27/2018 released May-2018
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: general purpose malloc implementation v4.5.0



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2018
Hardware Availability: May-2018
Software Availability: May-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	819	124	819	124	816	125	64	792	129	790	129	792	129
502.gcc_r	64	632	143	626	145	635	143	32	291	156	292	155	294	154
505.mcf_r	64	534	194	535	193	535	193	64	522	198	528	196	529	196
520.omnetpp_r	64	900	93.2	895	93.8	893	94.0	64	846	99.2	884	95.0	882	95.2
523.xalancbmk_r	64	438	154	437	155	438	154	64	349	194	351	193	353	191
525.x264_r	64	349	321	349	321	348	322	64	301	372	301	372	301	372
531.deepsjeng_r	64	458	160	458	160	467	157	64	485	151	486	151	486	151
541.leela_r	64	772	137	772	137	772	137	64	742	143	740	143	741	143
548.exchange2_r	64	555	302	566	296	555	302	64	544	308	556	302	559	300
557.xz_r	64	728	95.0	726	95.2	793	87.2	64	720	96.0	724	95.5	723	95.6

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu
Linux governor set to performance with cpupower "cpupower frequency-set -r -g performance"
dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2017/amd1704-rate-libs-revC/64;/cpu2017/amd1704-rate-libs-revC/32:"  
MALLOCONF = "lg_chunk:28"
```

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:
<http://developer.amd.com/amd-aocc/>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation, was obtained at
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOCONF with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg_chunk: set the virtual memory chunk size (log base 2). For example,
lg_chunk:21 sets the default chunk size to 2²¹ = 2MiB.

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Performance Determinism set to Power Deterministic

Processor Power and Utilization Monitoring set to Disabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C6 State

Sysinfo program /cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-02cn Sun Dec 31 21:46:14 2000

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

Platform Notes (Continued)

From /proc/cpuinfo

model name : AMD EPYC 7351 16-Core Processor

2 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 64

On-line CPU(s) list: 0-63

Thread(s) per core: 2

Core(s) per socket: 16

Socket(s): 2

NUMA node(s): 8

Vendor ID: AuthenticAMD

CPU family: 23

Model: 1

Model name: AMD EPYC 7351 16-Core Processor

Stepping: 2

CPU MHz: 2400.000

CPU max MHz: 2400.0000

CPU min MHz: 1200.0000

BogoMIPS: 4791.02

Virtualization: AMD-V

L1d cache: 32K

L1i cache: 64K

L2 cache: 512K

L3 cache: 8192K

NUMA node0 CPU(s): 0-3,32-35

NUMA node1 CPU(s): 4-7,36-39

NUMA node2 CPU(s): 8-11,40-43

NUMA node3 CPU(s): 12-15,44-47

NUMA node4 CPU(s): 16-19,48-51

NUMA node5 CPU(s): 20-23,52-55

NUMA node6 CPU(s): 24-27,56-59

NUMA node7 CPU(s): 28-31,60-63

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm

constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

Platform Notes (Continued)

pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat
hw_pstate rds retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase
bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero
irperf ibpb overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 32002 MB
node 0 free: 31876 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 32254 MB
node 1 free: 32152 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 32254 MB
node 2 free: 32148 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 32254 MB
node 3 free: 32146 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 32254 MB
node 4 free: 32144 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 32254 MB
node 5 free: 32136 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 32254 MB
node 6 free: 32130 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 32121 MB
node 7 free: 32016 MB
node distances:
```

```
node  0  1  2  3  4  5  6  7
  0:  10  16  16  16  32  32  32  32
  1:  16  10  16  16  32  32  32  32
  2:  16  16  10  16  32  32  32  32
  3:  16  16  16  10  32  32  32  32
  4:  32  32  32  32  10  16  16  16
  5:  32  32  32  32  16  10  16  16
  6:  32  32  32  32  16  16  10  16
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

Platform Notes (Continued)

7: 32 32 32 32 16 16 16 10

From /proc/meminfo

MemTotal: 263832168 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12 SP3

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 3

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION_ID="12.3"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-02cn 4.4.131-94.25-default #1 SMP Mon May 7 11:22:19 UTC 2018 (9700bac)

x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB

run-level 3 Dec 31 18:01

SPEC is set to: /cpu2017

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda3 btrfs 445G 12G 433G 3% /

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE A40 04/27/2018

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2018
Hardware Availability: May-2018
Software Availability: May-2018

Platform Notes (Continued)

Memory:

16x UNKNOWN NOT AVAILABLE

16x UNKNOWN NOT AVAILABLE 16 GB 1 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 502.gcc_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 523.xalancbmk_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base) 557.xz_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
peak) 541.leela_r(base)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CC 500.perlbench_r(peak) 525.x264_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 541.leela_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
FC 548.exchange2_r(base, peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-freemap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-freemap-arrays -inline-threshold=1000 -z muldefs -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -mavx -madx
-funroll-loops -ffast-math -z muldefs -Ofast -fdefault-integer-8
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-lsr-in-nested-loop -enable-iv-split
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran
-lamdlibm
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

Peak Compiler Invocation (Continued)

Fortran benchmarks:

clang gfortran

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc

502 gcc_r: -m32 -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -fgnu89-inline
-D_FILE_OFFSET_BITS=64(*) -ljemalloc

505.mcf_r: -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc

525.x264_r: Same as 500.perlbench_r
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

Peak Optimization Flags (Continued)

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-freemap-arrays -inline-threshold=1000 -ljemalloc
```

```
523.xalancbmk_r: -m32 -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-freemap-arrays -inline-threshold=1000
-D_FILE_OFFSET_BITS=64(*) -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

```
541.leela_r: -flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm
-unroll-count=8 -unroll-threshold=100 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -O3 -mavx2 -madx -funroll-loops
-ffast-math -Ofast -fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-lsr-in-nested-loop -enable-iv-split
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran
-lamdlibm
```

(*) Indicates an optimization flag that was found in a portability variable.

Peak Other Flags

C benchmarks:

```
502.gcc_r: -L/root/work/lib/jemalloc/lib32
```

C++ benchmarks:

```
523.xalancbmk_r: -L/root/work/lib/jemalloc/lib32
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECrate2017_int_base = 159

SPECrate2017_int_peak = 167

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2018

Hardware Availability: May-2018

Software Availability: May-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.html>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.xml>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2000-12-31 22:46:13-0500.

Report generated on 2019-02-21 17:18:19 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-10.