



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro


SuperStorage 5029P-E1CTR12L (X11SPH-nCTF , Intel Xeon Gold 6130)

SPECspeed2017\_fp\_base = 58.1

SPECspeed2017\_fp\_peak = 58.5

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jul-2017  
Software Availability: Mar-2018

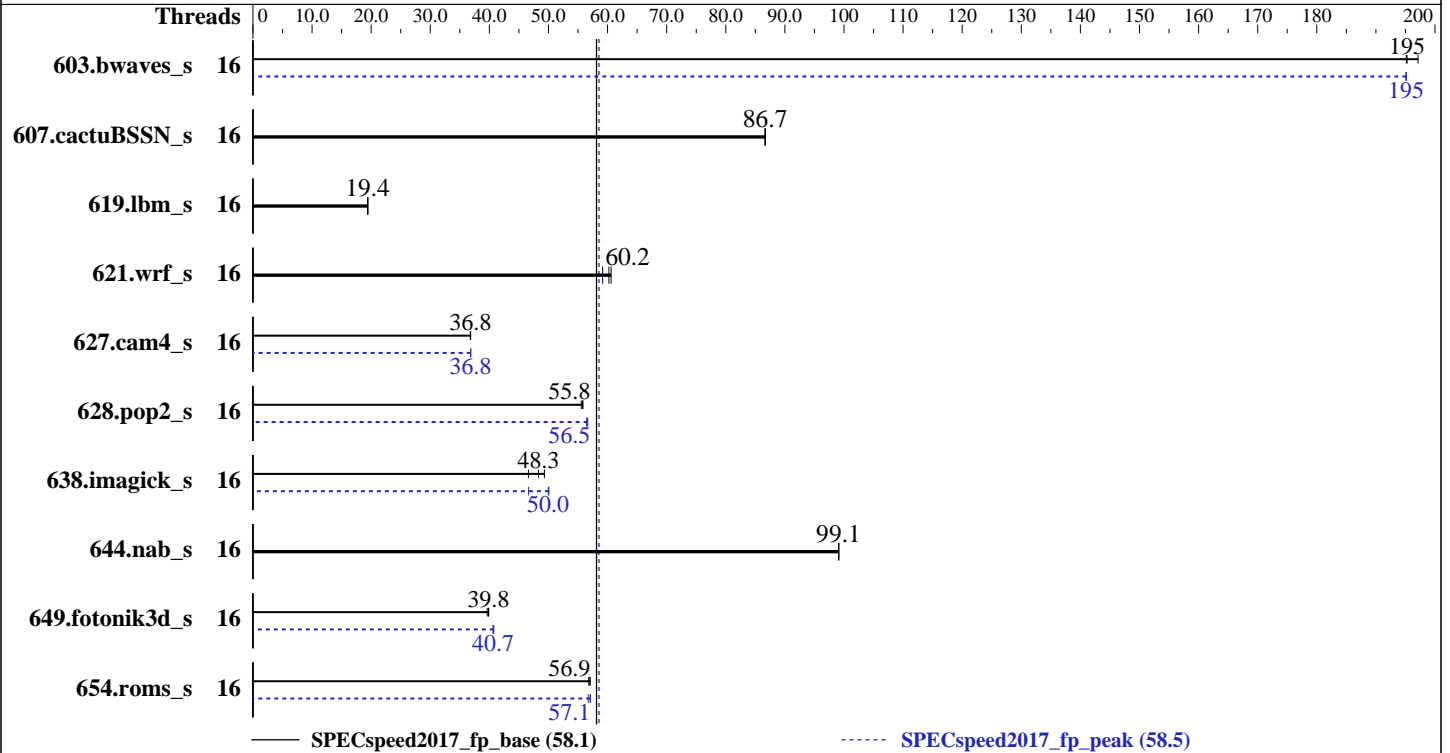

### Hardware

CPU Name: Intel Xeon Gold 6130  
Max MHz.: 3700  
Nominal: 2100  
Enabled: 16 cores, 1 chip  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 22 MB I+D on chip per chip  
Other: None  
Memory: 192 GB (6 x 32 GB 2Rx4 PC4-2666V-R)  
Storage: 1 x 2 TB NVMe SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3  
4.4.114-94.11-default  
Compiler: C/C++: Version 18.0.2.199 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 18.0.2.199 of Intel Fortran  
Compiler for Linux  
Parallel: Yes  
Firmware: Supermicro BIOS version 2.1 released Jun-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF, Intel Xeon Gold 6130)

SPECspeed2017\_fp\_base = 58.1

SPECspeed2017\_fp\_peak = 58.5

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jul-2017  
Software Availability: Mar-2018

## Results Table

| Benchmark       | Base    |            |             |            |             |            |             | Peak    |            |             |            |             |            |             |
|-----------------|---------|------------|-------------|------------|-------------|------------|-------------|---------|------------|-------------|------------|-------------|------------|-------------|
|                 | Threads | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Threads | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       |
| 603.bwaves_s    | 16      | 299        | 197         | 302        | 195         | <b>302</b> | <b>195</b>  | 16      | 302        | 195         | <b>302</b> | <b>195</b>  | 302        | 195         |
| 607.cactuBSSN_s | 16      | 192        | 86.7        | 192        | 86.7        | <b>192</b> | <b>86.7</b> | 16      | 192        | 86.7        | 192        | 86.7        | <b>192</b> | <b>86.7</b> |
| 619.lbm_s       | 16      | 269        | 19.5        | 270        | 19.4        | <b>270</b> | <b>19.4</b> | 16      | 269        | 19.5        | 270        | 19.4        | <b>270</b> | <b>19.4</b> |
| 621.wrf_s       | 16      | 218        | 60.6        | <b>220</b> | <b>60.2</b> | 224        | 59.2        | 16      | 218        | 60.6        | <b>220</b> | <b>60.2</b> | 224        | 59.2        |
| 627.cam4_s      | 16      | 241        | 36.8        | 241        | 36.8        | <b>241</b> | <b>36.8</b> | 16      | 241        | 36.8        | 241        | 36.8        | <b>241</b> | <b>36.8</b> |
| 628.pop2_s      | 16      | 214        | 55.5        | <b>213</b> | <b>55.8</b> | 213        | 55.8        | 16      | 210        | 56.6        | 210        | 56.5        | <b>210</b> | <b>56.5</b> |
| 638.imagick_s   | 16      | 293        | 49.3        | <b>299</b> | <b>48.3</b> | 310        | 46.6        | 16      | <b>289</b> | <b>50.0</b> | 288        | 50.1        | 309        | 46.6        |
| 644.nab_s       | 16      | <b>176</b> | <b>99.1</b> | 176        | 99.1        | 176        | 99.2        | 16      | <b>176</b> | <b>99.1</b> | 176        | 99.1        | 176        | 99.2        |
| 649.fotonik3d_s | 16      | <b>229</b> | <b>39.8</b> | 229        | 39.9        | 230        | 39.6        | 16      | 224        | 40.7        | <b>224</b> | <b>40.7</b> | 224        | 40.6        |
| 654.roms_s      | 16      | 276        | 57.1        | 277        | 56.9        | <b>277</b> | <b>56.9</b> | 16      | 276        | 57.1        | <b>276</b> | <b>57.1</b> | 278        | 56.7        |

SPECspeed2017\_fp\_base = 58.1

SPECspeed2017\_fp\_peak = 58.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc: jemalloc, a general purpose malloc implementation;

jemalloc: built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>;

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,  
Intel Xeon Gold 6130)

SPECspeed2017\_fp\_base = 58.1

SPECspeed2017\_fp\_peak = 58.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

## Platform Notes

BIOS Settings:

Hyper-Threading = Disable  
LLC prefetch = Enable  
Power Technology = Custom  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance  
Hardware P-state = Out of Band Mode  
XPT Prefetch = Enable  
Stale AtoS = Enable  
LLC dead line alloc = Disable  
SDDC Plus One = Disable  
ADDDC Sparing = Disable  
Patrol Scrub = Disable  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-liai Wed Jun 27 22:19:54 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
 1 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:   0-15
Thread(s) per core:    1
Core(s) per socket:    16
Socket(s):             1
NUMA node(s):         1
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
Stepping:              4
CPU MHz:               2100.004
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,  
Intel Xeon Gold 6130)

SPECspeed2017\_fp\_base = 58.1

SPECspeed2017\_fp\_peak = 58.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

```

BogoMIPS:          4200.00
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          1024K
L3 cache:          22528K
NUMA node0 CPU(s): 0-15
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp_epp intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 191880 MB
node 0 free: 184445 MB
node distances:
node    0
0:     10

```

```

From /proc/meminfo
MemTotal:          196486044 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF, Intel Xeon Gold 6130)

SPECspeed2017\_fp\_base = 58.1

SPECspeed2017\_fp\_peak = 58.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-liai 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 27 16:59
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p4  xfs   1.8T   60G  1.8T   4% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 2.1 06/11/2018
Memory:
 2x NO DIMM NO DIMM
 6x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)  
-----
```

```
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CC 619.lbm_s(peak)  
-----
```

```
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----  
=====
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF, Intel Xeon Gold 6130)

SPECspeed2017\_fp\_base = 58.1

SPECspeed2017\_fp\_peak = 58.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

### Compiler Version Notes (Continued)

FC 607.cactuBSSN\_s(base, peak)

-----  
icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base, peak)

-----  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 603.bwaves\_s(peak) 649.fotonik3d\_s(peak)

-----  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 621.wrf\_s(base) 627.cam4\_s(base, peak) 628.pop2\_s(base)

-----  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 621.wrf\_s(peak) 628.pop2\_s(peak)

-----  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF,  
Intel Xeon Gold 6130)

SPECspeed2017\_fp\_base = 58.1

SPECspeed2017\_fp\_peak = 58.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

## Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64  
607.cactuBSSN_s: -DSPEC_LP64  
619.lbm_s: -DSPEC_LP64  
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG  
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
-assume byterecl  
638.imagick_s: -DSPEC_LP64  
644.nab_s: -DSPEC_LP64  
649.fotonik3d_s: -DSPEC_LP64  
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,  
Intel Xeon Gold 6130)

SPECspeed2017\_fp\_base = 58.1

SPECspeed2017\_fp\_peak = 58.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: basepeak = yes
```

```
638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP
```

```
644.nab_s: basepeak = yes
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
```

(Continued on next page)





# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,  
Intel Xeon Gold 6130)

SPECspeed2017\_fp\_base = 58.1

SPECspeed2017\_fp\_peak = 58.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

## Peak Optimization Flags (Continued)

603.bwaves\_s (continued):

-qopenmp -nostandard-realloc-lhs

649.fotonik3d\_s: Same as 603.bwaves\_s

654.roms\_s: -DSPEC\_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3  
-qopenmp -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs

628.pop2\_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-27 10:19:54-0400.

Report generated on 2018-10-31 18:46:28 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-24.