



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017\_fp\_base = 170

H3C UniServer R6900 G3 (Intel Xeon Platinum 8160)

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 9066


Test Date: Jul-2018

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2018

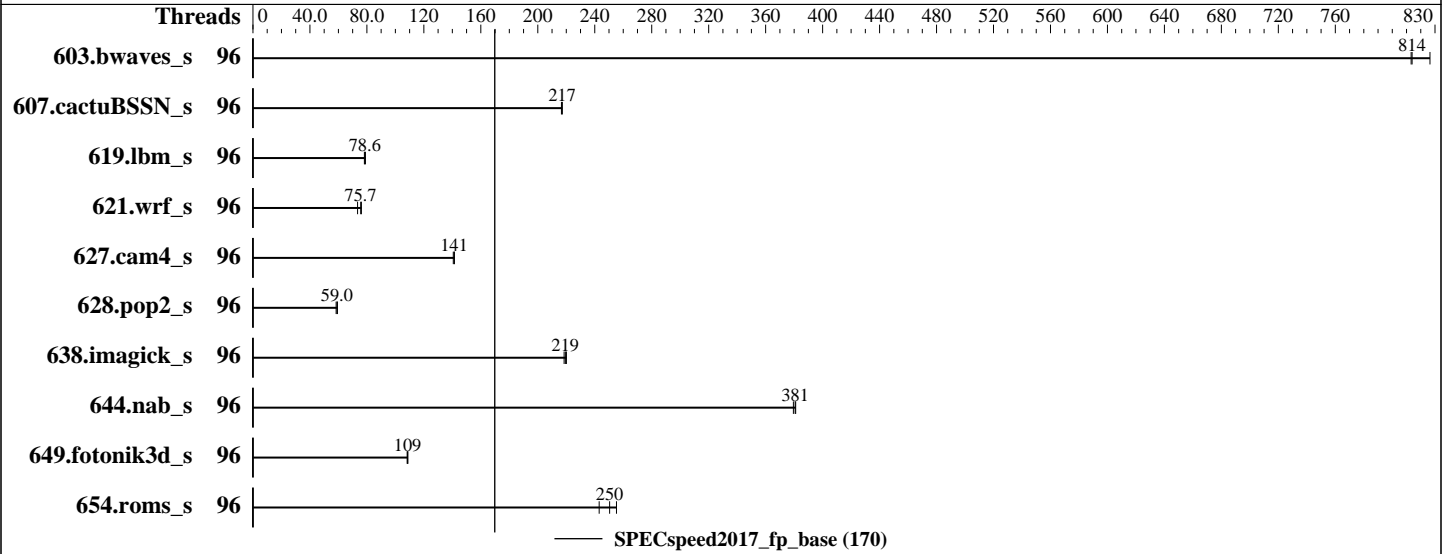

## Hardware

CPU Name: Intel Xeon Platinum 8160  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 96 cores, 4 chips  
 Orderable: 1,2,3,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 33 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 800 GB SATA SSD  
 Other: None

## Software

OS: CentOS Linux release 7.5.1804 (Core)  
 3.10.0-862.3.2.el7.x86\_64  
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.2.199 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: INSYDE Corp. BIOS Version 1.00.16 released May-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017\_fp\_base = 170

H3C UniServer R6900 G3 (Intel Xeon Platinum 8160)

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2018

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	<b><u>72.5</u></b>	<b><u>814</u></b>	71.4	826	72.5	813							
607.cactuBSSN_s	96	76.8	217	<b><u>76.8</u></b>	<b><u>217</u></b>	77.0	217							
619.lbm_s	96	<b><u>66.7</u></b>	<b><u>78.6</u></b>	66.3	79.0	66.9	78.2							
621.wrf_s	96	<b><u>175</u></b>	<b><u>75.7</u></b>	174	76.1	180	73.5							
627.cam4_s	96	63.0	141	62.7	141	<b><u>62.7</u></b>	<b><u>141</u></b>							
628.pop2_s	96	<b><u>201</u></b>	<b><u>59.0</u></b>	203	58.4	200	59.3							
638.imagick_s	96	66.0	218	65.5	220	<b><u>65.8</u></b>	<b><u>219</u></b>							
644.nab_s	96	46.0	379	<b><u>45.9</u></b>	<b><u>381</u></b>	45.8	381							
649.fotonik3d_s	96	83.8	109	84.2	108	<b><u>84.0</u></b>	<b><u>109</u></b>							
654.roms_s	96	64.8	243	61.7	255	<b><u>62.9</u></b>	<b><u>250</u></b>							

SPECspeed2017\_fp\_base = 170

SPECspeed2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/speccpu/lib/ia32:/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-32:/home/speccpu/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Set Sub NUMA Cluster to Disabled

Set IMC Interleaving to Auto

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017\_fp\_base = 170

H3C UniServer R6900 G3 (Intel Xeon Platinum 8160)

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2018

Hardware Availability: Sep-2017

Software Availability: May-2018

## Platform Notes (Continued)

```

Set Power Supply Mode to Performance
Set Workload Configuration to NUMA
Set Hyper Threading to Disabled
Set C1E to Disabled
Set Patrol Scrub to Disabled
Sysinfo program /home/speccpu/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on localhost.localdomain Tue Jul 10 00:46:46 2018

```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
 4 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 24
  siblings  : 24
 physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
 physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
 physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
 physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Thread(s) per core:    1
Core(s) per socket:    24
Socket(s):              4
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
Stepping:               4
CPU MHz:                1718.939
CPU max MHz:           3700.0000
CPU min MHz:           1000.0000
BogoMIPS:               4200.00
Virtualization:        VT-x
L1d cache:              32K

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017\_fp\_base = 170

H3C UniServer R6900 G3 (Intel Xeon Platinum 8160)

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2018

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2018

## Platform Notes (Continued)

```

L1i cache:          32K
L2 cache:           1024K
L3 cache:           33792K
NUMA node0 CPU(s): 0-23
NUMA node1 CPU(s): 24-47
NUMA node2 CPU(s): 48-71
NUMA node3 CPU(s): 72-95
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
intel_pt mba tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2
smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt
clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local ibpb ibrs stibp dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req pku ospke spec_ctrl intel_stibp

```

```

/proc/cpuinfo cache data
cache size : 33792 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
node 0 size: 194957 MB
node 0 free: 189226 MB
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
node 1 size: 196608 MB
node 1 free: 189772 MB
node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
node 2 size: 196608 MB
node 2 free: 190908 MB
node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
node 3 size: 196608 MB
node 3 free: 191372 MB
node distances:
node  0  1  2  3
 0:  10  21  21  21
 1:  21  10  21  21
 2:  21  21  10  21
 3:  21  21  21  10

```

```

From /proc/meminfo
MemTotal:          790695820 kB
HugePages_Total:      0

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017\_fp\_base = 170

H3C UniServer R6900 G3 (Intel Xeon Platinum 8160)

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2018

Hardware Availability: Sep-2017

Software Availability: May-2018

## Platform Notes (Continued)

Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
CentOS Linux release 7.5.1804 (Core)
```

```
From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 7.5.1804 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.5 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="7 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="7"
  PRETTY_NAME="CentOS Linux 7 (Core)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.5.1804 (Core)
system-release: CentOS Linux release 7.5.1804 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

```
uname -a:
Linux localhost.localdomain 3.10.0-862.3.2.el7.x86_64 #1 SMP Mon May 21 23:36:36 UTC
2018 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 9 18:55
```

```
SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/centos-home xfs   690G  13G  677G   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS INSYDE Corp. 1.00.16P00 05/30/2018
Memory:
  24x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666
  24x NO DIMM NO DIMM
```

(End of data from sysinfo program)

## Compiler Version Notes

```
====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017\_fp\_base = 170

H3C UniServer R6900 G3 (Intel Xeon Platinum 8160)

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2018

Hardware Availability: Sep-2017

Software Availability: May-2018

## Compiler Version Notes (Continued)

```
-----
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 607.cactuBSSN_s(base)
-----
```

```
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
-----
```

```
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
-----
```

```
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017\_fp\_base = 170

H3C UniServer R6900 G3 (Intel Xeon Platinum 8160)

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2018

Hardware Availability: Sep-2017

Software Availability: May-2018

## Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

```

Fortran benchmarks:

```

-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

```

Benchmarks using Fortran, C, and C++:

```

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

```

## Base Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed2017\_fp\_base = 170

H3C UniServer R6900 G3 (Intel Xeon Platinum 8160)

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 9066

**Test Sponsor:** New H3C Technologies Co., Ltd.

**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Jul-2018

**Hardware Availability:** Sep-2017

**Software Availability:** May-2018

## Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.3-SKL-RevC.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevC.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.3-SKL-RevC.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevC.xml)

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-07-09 12:46:45-0400.

Report generated on 2018-10-31 18:24:00 by CPU2017 PDF formatter v6067.

Originally published on 2018-08-07.