



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation


Format sp. z o.o.
ASUS RS500-E8-RS4 v2

SPECrate2017_int_base = 65.5

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032
Test Sponsor: Format sp. z o.o.
Tested by: Piotr Mankiewicz

Test Date: Aug-2018
Hardware Availability: Aug-2018
Software Availability: Apr-2018

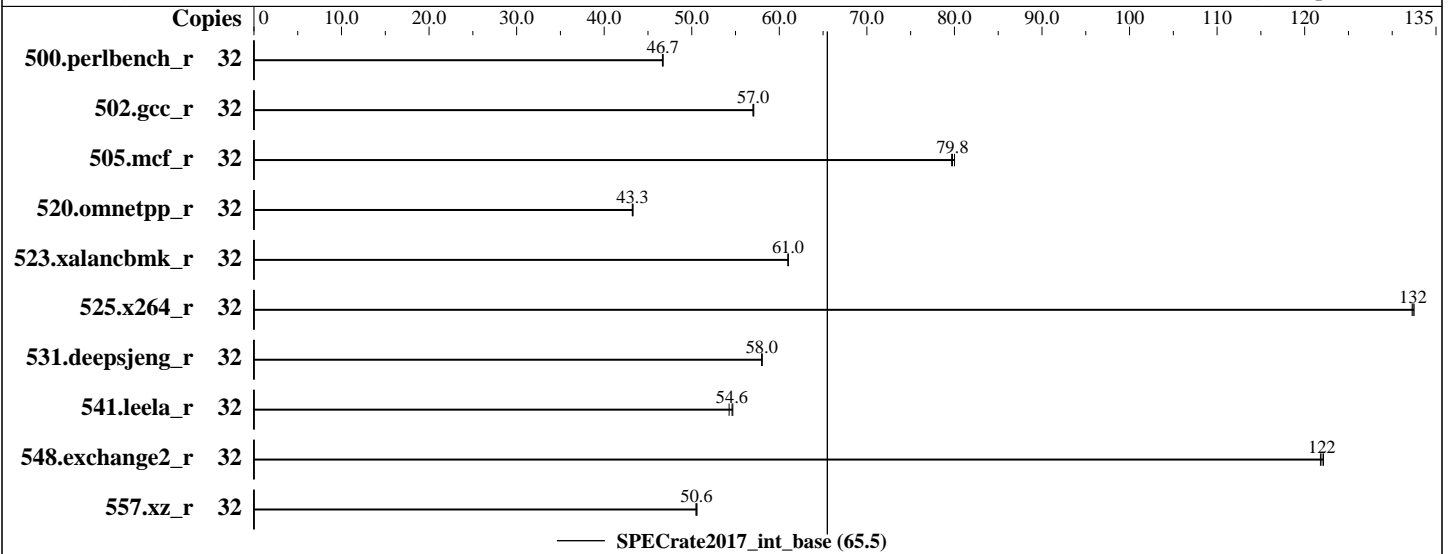

Hardware

CPU Name: Intel Xeon E5-2620 v4
Max MHz.: 3000
Nominal: 2100
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1,2 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 256 KB I+D on chip per core
L3: 20 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R, running at 2133)
Storage: 1x 800 GB PCIe SSD
Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.5 (Maipo)
3.10.0-862.9.1.el7.x86_64
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: Version 3401 released Jun-2017
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc: jemalloc memory allocator library V5.0.1;



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

SPECrate2017_int_base = 65.5

ASUS RS500-E8-RS4 v2

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032
Test Sponsor: Format sp. z o.o.
Tested by: Piotr Mankiewicz

Test Date: Aug-2018
Hardware Availability: Aug-2018
Software Availability: Apr-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	1092	46.6	<u>1091</u>	<u>46.7</u>	1090	46.7							
502.gcc_r	32	795	57.0	<u>795</u>	<u>57.0</u>	794	57.1							
505.mcf_r	32	<u>648</u>	<u>79.8</u>	649	79.7	646	80.0							
520.omnetpp_r	32	972	43.2	<u>971</u>	<u>43.3</u>	970	43.3							
523.xalancbmk_r	32	<u>554</u>	<u>61.0</u>	554	61.0	554	61.0							
525.x264_r	32	424	132	423	132	<u>423</u>	<u>132</u>							
531.deepsjeng_r	32	632	58.0	<u>632</u>	<u>58.0</u>	632	58.0							
541.leela_r	32	<u>971</u>	<u>54.6</u>	977	54.3	969	54.7							
548.exchange2_r	32	688	122	<u>687</u>	<u>122</u>	686	122							
557.xz_r	32	<u>683</u>	<u>50.6</u>	683	50.6	685	50.5							

SPECrate2017_int_base = 65.5

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2017/lib/ia32:/usr/cpu2017/lib/intel64:/usr/cpu2017/je5.0.1-32:/usr/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets; built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5
sources available via jemalloc.net;



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

SPECrate2017_int_base = 65.5

ASUS RS500-E8-RS4 v2

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032
Test Sponsor: Format sp. z o.o.
Tested by: Piotr Mankiewicz

Test Date: Aug-2018
Hardware Availability: Aug-2018
Software Availability: Apr-2018

Platform Notes

BIOS Configuration:
Hardware Prefetch: Enabled
Power Technology: Custom
Config TDP: Enabled
Config TDP Level: Nominal
Energy Performance BIAS setting.: Balanced Performance
Workload Configuration: I/O Sensitive
Power Boost: Enable
CPU C3 report: Disable
CPU C6 report: Enable
Hyper-Threading: Enable
Sysinfo program /usr/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Mon Aug 6 21:02:39 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 79
Model name: Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
Stepping: 1
CPU MHz: 2095.139
BogoMIPS: 4190.27

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

SPECrate2017_int_base = 65.5

ASUS RS500-E8-RS4 v2

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Date: Aug-2018

Test Sponsor: Format sp. z o.o.

Hardware Availability: Aug-2018

Tested by: Piotr Mankiewicz

Software Availability: Apr-2018

Platform Notes (Continued)

```

Virtualization:      VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           256K
L3 cache:           20480K
NUMA node0 CPU(s): 0-7,16-23
NUMA node1 CPU(s): 8-15,24-31
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmperf
eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin intel_pt ssbd
ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a rdseed adx smap xsaveopt cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts spec_ctrl
intel_stibp

```

```

/proc/cpuinfo cache data
cache size : 20480 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 262044 MB
node 0 free: 255974 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 262144 MB
node 1 free: 256282 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10

```

```

From /proc/meminfo
MemTotal:      528096776 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.5 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

SPECrate2017_int_base = 65.5

ASUS RS500-E8-RS4 v2

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032
Test Sponsor: Format sp. z o.o.
Tested by: Piotr Mankiewicz

Test Date: Aug-2018
Hardware Availability: Aug-2018
Software Availability: Apr-2018

Platform Notes (Continued)

```
VARIANT_ID="server"
VERSION_ID="7.5"
PRETTY_NAME="Red Hat Enterprise Linux"
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-862.9.1.el7.x86_64 #1 SMP Wed Jun 27 04:30:39 EDT
2018 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences
CVE-2017-5715 (Spectre variant 2): Mitigation: Full retpoline
```

```
run-level 3 Aug 6 20:59
```

```
SPEC is set to: /usr/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs 50G 35G 16G 69% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 3401 06/22/2017
Memory:
16x <BAD INDEX> <BAD INDEX> 32 GB 2 rank 2400, configured at 2133
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
557.xz_r(base)  
-----
```

```
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)  
541.leela_r(base)  
-----
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

ASUS RS500-E8-RS4 v2

SPECrate2017_int_base = 65.5

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Sponsor: Format sp. z o.o.

Tested by: Piotr Mankiewicz

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Apr-2018

Compiler Version Notes (Continued)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 548.exchange2_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

ASUS RS500-E8-RS4 v2

SPECrate2017_int_base = 65.5

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Sponsor: Format sp. z o.o.

Tested by: Piotr Mankiewicz

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Apr-2018

Base Optimization Flags (Continued)

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/FORMAT-RS500-E8-RS4-v2-Platform-Settings.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/FORMAT-RS500-E8-RS4-v2-Platform-Settings.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-08-06 21:02:38-0400.

Report generated on 2018-10-31 18:31:34 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-11.