



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Sep-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

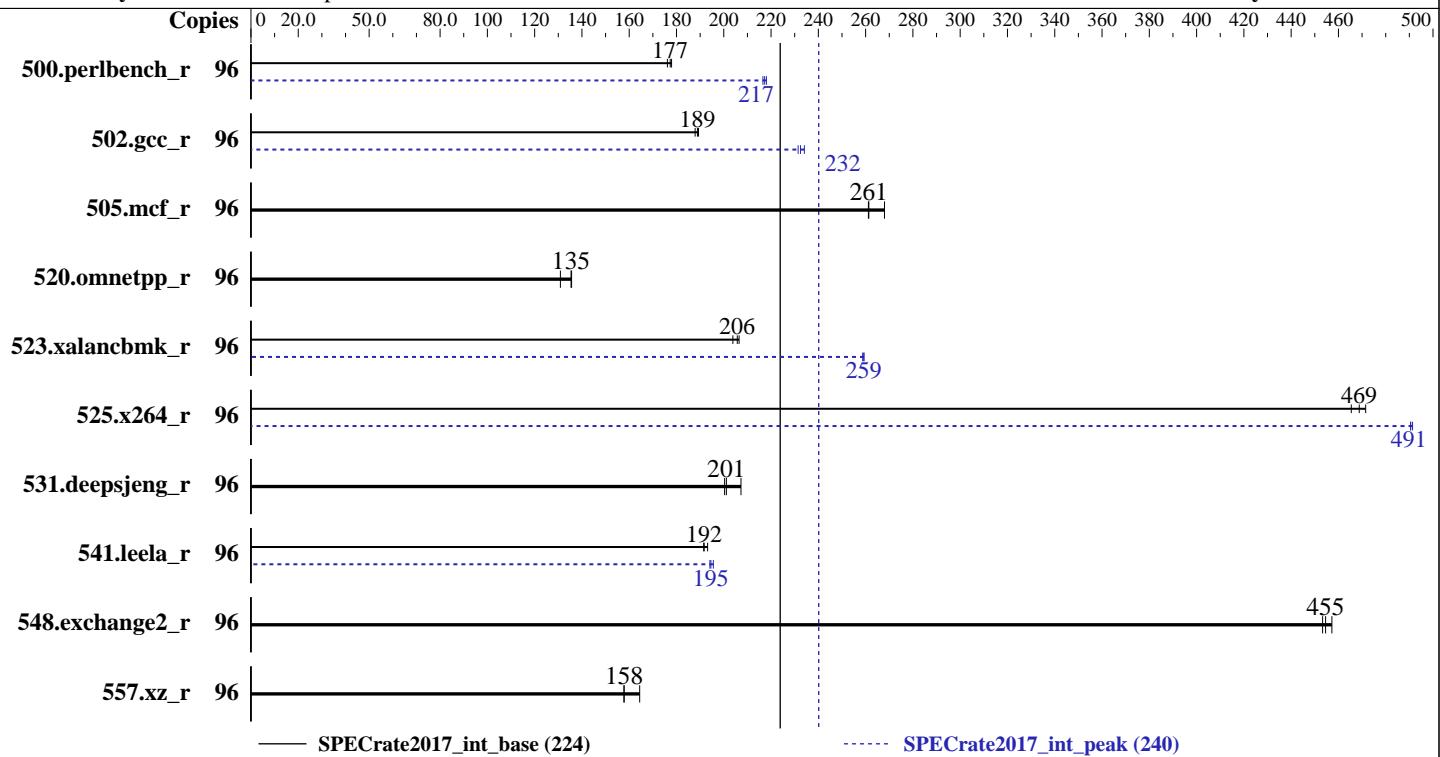

Hardware		Software	
CPU Name:	Intel Xeon Platinum 8160M	OS:	Red Hat Enterprise Linux Server release 7.4 (Maipo)
Max MHz.:	3700	Compiler:	Kernel 3.10.0-693.21.1.el7.x86_64 C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Nominal:	2100	Parallel:	No
Enabled:	48 cores, 2 chips, 2 threads/core	Firmware:	Version F21 02/22/2018 released Apr-2018
Orderable:	1,2 chips	File System:	ext4
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	Run level 3 (multi-user)
L2:	1 MB I+D on chip per core	Base Pointers:	64-bit
L3:	33 MB I+D on chip per chip	Peak Pointers:	32/64-bit
Other:	None	Other:	jemalloc memory allocator library V5.0.1
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)		
Storage:	1 x 1 TB SATA, 7200 RPM		
Other:	None		



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

SPECrate2017_int_base = 224

SPECrate2017_int_peak = 240

CPU2017 License: 9006

Test Date: Sep-2018

Test Sponsor: NEC Corporation

Hardware Availability: Jan-2018

Tested by: NEC Corporation

Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	862	177	859	178	868	176	96	701	218	706	217	703	217
502.gcc_r	96	720	189	718	189	724	188	96	581	234	587	231	585	232
505.mcf_r	96	579	268	594	261	594	261	96	579	268	594	261	594	261
520.omnetpp_r	96	930	135	929	136	962	131	96	930	135	929	136	962	131
523.xalancbmk_r	96	491	206	493	206	497	204	96	391	259	391	259	392	259
525.x264_r	96	356	472	359	469	361	465	96	343	491	342	491	343	491
531.deepsjeng_r	96	531	207	547	201	549	200	96	531	207	547	201	549	200
541.leela_r	96	830	192	829	192	823	193	96	817	195	819	194	813	196
548.exchange2_r	96	553	455	555	453	550	457	96	553	455	555	453	550	457
557.xz_r	96	631	164	657	158	657	158	96	631	164	657	158	657	158

SPECrate2017_int_base = 224

SPECrate2017_int_peak = 240

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

SPECrate2017_int_base = 224

SPECrate2017_int_peak = 240

CPU2017 License: 9006

Test Date: Sep-2018

Test Sponsor: NEC Corporation

Hardware Availability: Jan-2018

Tested by: NEC Corporation

Software Availability: Mar-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

ENERGY_PERF_BIAS_CFG mode: Performance

SNC: Enable

IMC Interleaving: 1-way Interleave

Stale AtoS: Enable

LLC dead line alloc: Disable

Patrol Scrub: Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on d120h Wed Sep 12 13:39:08 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8160M CPU @ 2.10GHz

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

On-line CPU(s) list: 0-95

Thread(s) per core: 2

Core(s) per socket: 24

Socket(s): 2

NUMA node(s): 4

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

SPECrate2017_int_base = 224

SPECrate2017_int_peak = 240

CPU2017 License: 9006

Test Date: Sep-2018

Test Sponsor: NEC Corporation

Hardware Availability: Jan-2018

Tested by: NEC Corporation

Software Availability: Mar-2018

Platform Notes (Continued)

```

Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8160M CPU @ 2.10GHz
Stepping: 4
CPU MHz: 2811.867
CPU max MHz: 3700.0000
CPU min MHz: 1000.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 33792K
NUMA node0 CPU(s): 0-2,6-8,12-14,18-20,48-50,54-56,60-62,66-68
NUMA node1 CPU(s): 3-5,9-11,15-17,21-23,51-53,57-59,63-65,69-71
NUMA node2 CPU(s): 24-26,30-32,36-38,42-44,72-74,78-80,84-86,90-92
NUMA node3 CPU(s): 27-29,33-35,39-41,45-47,75-77,81-83,87-89,93-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req

```

```
/proc/cpuinfo cache data
cache size : 33792 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 48 49 50 54 55 56 60 61 62 66 67 68
node 0 size: 96931 MB
node 0 free: 94071 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 51 52 53 57 58 59 63 64 65 69 70 71
node 1 size: 98304 MB
node 1 free: 95963 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 72 73 74 78 79 80 84 85 86 90 91 92
node 2 size: 98304 MB
node 2 free: 95982 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 75 76 77 81 82 83 87 88 89 93 94 95
node 3 size: 98304 MB

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

SPECrate2017_int_base = 224

SPECrate2017_int_peak = 240

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Sep-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Platform Notes (Continued)

```
node 3 free: 95958 MB
node distances:
node  0   1   2   3
 0: 10 11 21 21
 1: 11 10 21 21
 2: 21 21 10 11
 3: 21 21 11 10

From /proc/meminfo
MemTotal:      394643472 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:
Linux d120h 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Sep 12 13:33

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  909G  427G  436G  50%  /


Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS GIGABYTE F21 02/22/2018
Memory:
 4x NO DIMM NO DIMM
 12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate2017_int_base = 224

SPECrate2017_int_peak = 240

Test Date: Sep-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
    525.x264_r(base, peak) 557.xz_r(base, peak)
=====
```

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
=====
```

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
    541.leela_r(base)
=====
```

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
    541.leela_r(peak)
=====
```

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
=====
```

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

SPECrate2017_int_base = 224

SPECrate2017_int_peak = 240

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Sep-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=3 -L/usr/local/jet5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=3 -L/usr/local/jet5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=3 -fno-standard-realloc-lhs -falign array32byte
-L/usr/local/jet5.0.1-64/lib -ljemalloc

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECCrate2017_int_base = 224

SPECCrate2017_int_peak = 240

Test Date: Sep-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Base Other Flags (Continued)

Fortran benchmarks:

-m64

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate2017_int_base = 224

SPECrate2017_int_peak = 240

Test Date: Sep-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk_r: -m32

Fortran benchmarks:

-m64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

SPECrate2017_int_base = 224

SPECrate2017_int_peak = 240

CPU2017 License: 9006

Test Date: Sep-2018

Test Sponsor: NEC Corporation

Hardware Availability: Jan-2018

Tested by: NEC Corporation

Software Availability: Mar-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-D120h-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-D120h-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-09-12 00:39:07-0400.

Report generated on 2018-10-31 19:13:01 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-02.