



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Sep-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

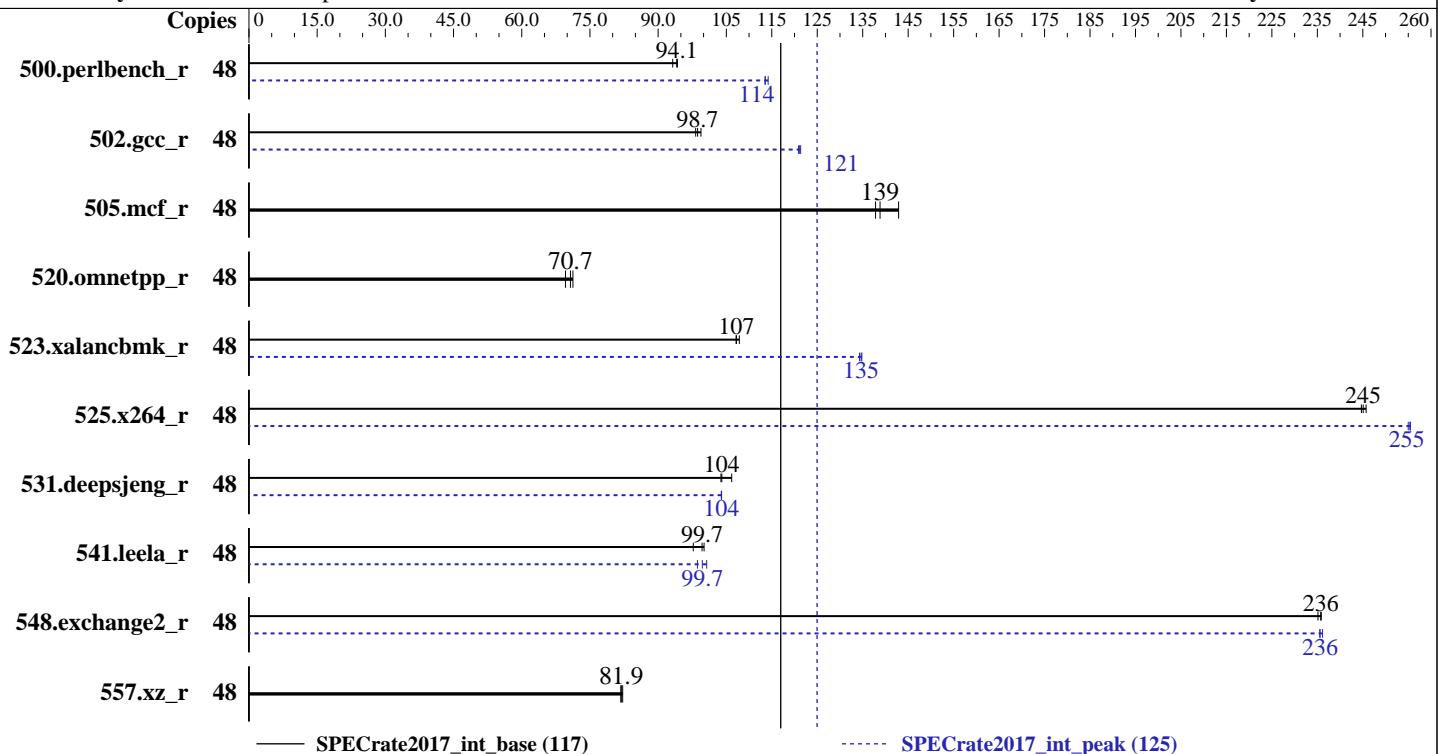

— SPECrate2017\_int\_base (117)

····· SPECrate2017\_int\_peak (125)

### Hardware

CPU Name: Intel Xeon Platinum 8160M  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 24 cores, 1 chip, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 33 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (6 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 1 TB SATA, 7200 RPM  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 Compiler: Kernel 3.10.0-693.21.1.el7.x86\_64  
 C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version F21 02/22/2018 released Apr-2018  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

**SPECrate2017\_int\_base = 117**

**SPECrate2017\_int\_peak = 125**

Test Date: Sep-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	811	94.2	<b>812</b>	<b>94.1</b>	820	93.2	48	669	114	673	114	<b>673</b>	<b>114</b>
502.gcc_r	48	692	98.3	684	99.4	<b>689</b>	<b>98.7</b>	48	562	121	<b>561</b>	<b>121</b>	560	121
505.mcf_r	48	543	143	<b>559</b>	<b>139</b>	563	138	48	543	143	<b>559</b>	<b>139</b>	563	138
520.omnetpp_r	48	884	71.3	<b>891</b>	<b>70.7</b>	904	69.6	48	884	71.3	<b>891</b>	<b>70.7</b>	904	69.6
523.xalancbmk_r	48	470	108	473	107	<b>473</b>	<b>107</b>	48	377	134	376	135	<b>376</b>	<b>135</b>
525.x264_r	48	<b>343</b>	<b>245</b>	342	246	343	245	48	330	255	329	255	<b>329</b>	<b>255</b>
531.deepsjeng_r	48	518	106	<b>529</b>	<b>104</b>	530	104	48	<b>529</b>	<b>104</b>	529	104	530	104
541.leela_r	48	<b>798</b>	<b>99.7</b>	794	100	813	97.7	48	806	98.6	<b>797</b>	<b>99.7</b>	790	101
548.exchange2_r	48	<b>533</b>	<b>236</b>	535	235	533	236	48	534	236	533	236	<b>534</b>	<b>236</b>
557.xz_r	48	631	82.2	<b>633</b>	<b>81.9</b>	634	81.8	48	631	82.2	<b>633</b>	<b>81.9</b>	634	81.8

**SPECrate2017\_int\_base = 117**

**SPECrate2017\_int\_peak = 125**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate2017\_int\_base = 117

SPECrate2017\_int\_peak = 125

Test Date: Sep-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

ENERGY\_PERF\_BIAS\_CFG mode: Performance

SNC: Enable

IMC Interleaving: 1-way Interleave

LLC dead line alloc: Disable

Patrol Scrub: Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on d120h Tue Sep 18 08:34:04 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8160M CPU @ 2.10GHz

1 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 48

On-line CPU(s) list: 0-47

Thread(s) per core: 2

Core(s) per socket: 24

Socket(s): 1

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate2017\_int\_base = 117

SPECrate2017\_int\_peak = 125

Test Date: Sep-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

## Platform Notes (Continued)

Model name: Intel(R) Xeon(R) Platinum 8160M CPU @ 2.10GHz  
Stepping: 4  
CPU MHz: 1025.308  
CPU max MHz: 3700.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4200.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 33792K  
NUMA node0 CPU(s): 0-2,6-8,12-14,18-20,24-26,30-32,36-38,42-44  
NUMA node1 CPU(s): 3-5,9-11,15-17,21-23,27-29,33-35,39-41,45-47  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_l3 cdp\_l3 invpcid\_single intel\_pt spec\_ctrl ibpb\_support tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsaved xgetbv1 cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req

/proc/cpuinfo cache data  
cache size : 33792 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 24 25 26 30 31 32 36 37 38 42 43 44  
node 0 size: 96932 MB  
node 0 free: 94033 MB  
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 27 28 29 33 34 35 39 40 41 45 46 47  
node 1 size: 98304 MB  
node 1 free: 95819 MB  
node distances:  
node 0 1  
0: 10 11  
1: 11 10

From /proc/meminfo  
MemTotal: 196475904 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate2017\_int\_base = 117

SPECrate2017\_int\_peak = 125

Test Date: Sep-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

## Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux d120h 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 18 08:28
```

```
SPEC is set to: /home/cpu2017
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	909G	492G	371G	58%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS GIGABYTE F21 02/22/2018

Memory:

10x NO DIMM NO DIMM
6x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
  525.x264_r(base, peak) 557.xz_r(base, peak)
=====
```

```
=====
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/D120h (Intel Xeon Platinum 8160M)

**SPECrate2017\_int\_base = 117**

**SPECrate2017\_int\_peak = 125**

**CPU2017 License:** 9006

**Test Date:** Sep-2018

**Test Sponsor:** NEC Corporation

**Hardware Availability:** Jan-2018

**Tested by:** NEC Corporation

**Software Availability:** Mar-2018

## Compiler Version Notes (Continued)

CC 500.perlbench\_r(peak) 502.gcc\_r(peak)

```
=====
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
```

```
=====
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
      541.leela_r(peak)
```

```
=====
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
FC 548.exchange2_r(base, peak)
```

```
=====
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

  icc

C++ benchmarks:

  icpc

Fortran benchmarks:

  ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

<b>NEC Corporation</b>	<b>SPECrate2017_int_base = 117</b>
Express5800/D120h (Intel Xeon Platinum 8160M)	<b>SPECrate2017_int_peak = 125</b>
<b>CPU2017 License:</b> 9006	<b>Test Date:</b> Sep-2018
<b>Test Sponsor:</b> NEC Corporation	<b>Hardware Availability:</b> Jan-2018
<b>Tested by:</b> NEC Corporation	<b>Software Availability:</b> Mar-2018

## **Base Portability Flags (Continued)**

```
502.gcc_r: -DSPEC_LP64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

## C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

### Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fno-opt-mem-layout-trans=3 -fno-standard-realloc-lhs -falign array32byte  
-L/usr/local/ie5.0.1-64/lib -fjemalloc
```

## Base Other Flags

C benchmarks:

-m64 -std=c11

## C++ benchmarks:

-m64

Fortran benchmarks

-m64

# Peak Compiler Invocation

### C benchmarks:

jcc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/D120h (Intel Xeon Platinum 8160M)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate2017\_int\_base = 117

SPECrate2017\_int\_peak = 125

Test Date: Sep-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc

502.gcc\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/D120h (Intel Xeon Platinum 8160M)

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**SPECrate2017\_int\_base = 117**

**SPECrate2017\_int\_peak = 125**

**Test Date:** Sep-2018

**Hardware Availability:** Jan-2018

**Software Availability:** Mar-2018

## Peak Optimization Flags (Continued)

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc

541.leela\_r: Same as 531.deepsjeng\_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk\_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-D120h-RevA.html>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/D120h (Intel Xeon Platinum 8160M)

**SPECrate2017\_int\_base = 117**

**SPECrate2017\_int\_peak = 125**

**CPU2017 License:** 9006

**Test Date:** Sep-2018

**Test Sponsor:** NEC Corporation

**Hardware Availability:** Jan-2018

**Tested by:** NEC Corporation

**Software Availability:** Mar-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-D120h-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-09-17 19:34:04-0400.

Report generated on 2018-10-31 19:05:47 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-16.