



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.80 GHz, Intel Xeon E-2186G)

SPECrate2017_int_base = 41.2

SPECrate2017_int_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2018

Hardware Availability: Nov-2018

Software Availability: Apr-2018

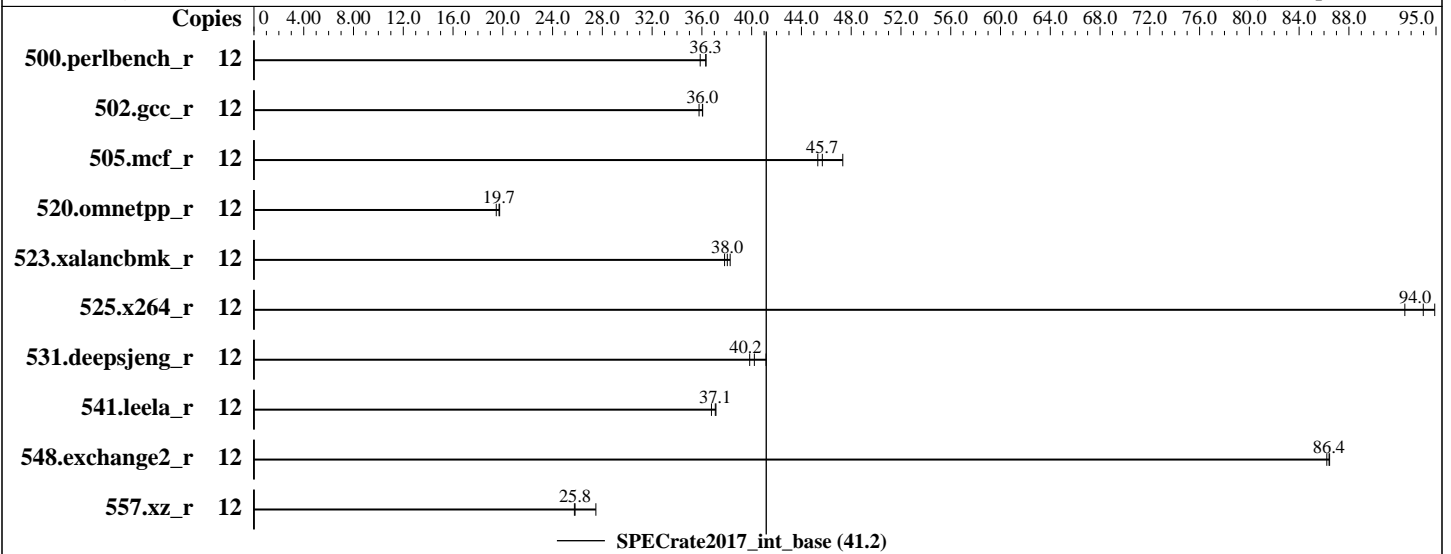

Hardware

CPU Name: Intel Xeon E-2186G
 Max MHz.: 4700
 Nominal: 3800
 Enabled: 6 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 12 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)
 Storage: 1 x 480 GB SATA SSD, RAID 0
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.5 (Maipo)
 Kernel 3.10.0-862.el7.x86_64
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: HPE BIOS Version U43 08/15/2018 released Aug-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.80 GHz, Intel Xeon E-2186G)

SPECrate2017_int_base = 41.2

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2018
Hardware Availability: Nov-2018
Software Availability: Apr-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	526	36.3	533	35.9	526	36.3							
502.gcc_r	12	471	36.0	471	36.1	475	35.8							
505.mcf_r	12	410	47.3	425	45.7	428	45.3							
520.omnetpp_r	12	797	19.7	799	19.7	808	19.5							
523.xalancbmk_r	12	331	38.3	333	38.0	335	37.8							
525.x264_r	12	227	92.5	221	94.9	224	94.0							
531.deepsjeng_r	12	334	41.2	342	40.2	345	39.8							
541.leela_r	12	536	37.1	540	36.8	535	37.1							
548.exchange2_r	12	365	86.2	364	86.4	364	86.4							
557.xz_r	12	472	27.5	502	25.8	503	25.8							

SPECrate2017_int_base = 41.2

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
IRQ balance service was stopped using "service irqbalance stop"
Tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.80 GHz, Intel Xeon E-2186G)

SPECrate2017_int_base = 41.2

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2018

Hardware Availability: Nov-2018

Software Availability: Apr-2018

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets; built with RedHat Enterprise 7.5, and the system compiler gcc 4.8.5;

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C1E State

Workload Profile set to Custom

Dynamic Power Saving Mode is Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on DL20-Gen10-hs Tue Aug 28 12:59:16 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) E-2186G CPU @ 3.80GHz

1 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 12

On-line CPU(s) list: 0-11

Thread(s) per core: 2

Core(s) per socket: 6

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.80 GHz, Intel Xeon E-2186G)

SPECrate2017_int_base = 41.2

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2018
Hardware Availability: Nov-2018
Software Availability: Apr-2018

Platform Notes (Continued)

```

CPU family:           6
Model:                158
Model name:           Intel(R) Xeon(R) E-2186G CPU @ 3.80GHz
Stepping:             10
CPU MHz:              3800.000
BogoMIPS:             7584.00
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:             256K
L3 cache:            12288K
NUMA node0 CPU(s):   0-11
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb intel_pt tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1 ibpb ibrs stibp dtherm ida
arat pln pts spec_ctrl intel_stibp

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 65385 MB
node 0 free: 63268 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal:        65654036 kB
HugePages_Total: 0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.5 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.80 GHz, Intel Xeon E-2186G)

SPECrate2017_int_base = 41.2

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2018
Hardware Availability: Nov-2018
Software Availability: Apr-2018

Platform Notes (Continued)

```
VARIANT_ID="server"
VERSION_ID="7.5"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server
```

```
uname -a:
Linux DL20-Gen10-hs 3.10.0-862.el7.x86_64 #1 SMP Wed Mar 21 18:14:51 EDT 2018 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 28 12:55
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   365G   51G  314G  14% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HPE U43 08/15/2018
Memory:
4x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666, configured at 2667
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
557.xz_r(base)
```

```
-----  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)  
541.leela_r(base)
```

```
-----  
icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.80 GHz, Intel Xeon E-2186G)

SPECrate2017_int_base = 41.2

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2018
Hardware Availability: Nov-2018
Software Availability: Apr-2018

Compiler Version Notes (Continued)

FC 548.exchange2_r(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.80 GHz, Intel Xeon E-2186G)

SPECrate2017_int_base = 41.2

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2018

Hardware Availability: Nov-2018

Software Availability: Apr-2018

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revJ.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revJ.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-08-28 12:59:15-0400.

Report generated on 2018-11-06 11:32:10 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-05.