



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017\_fp\_base = 176

SPECrate2017\_fp\_peak = 180

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

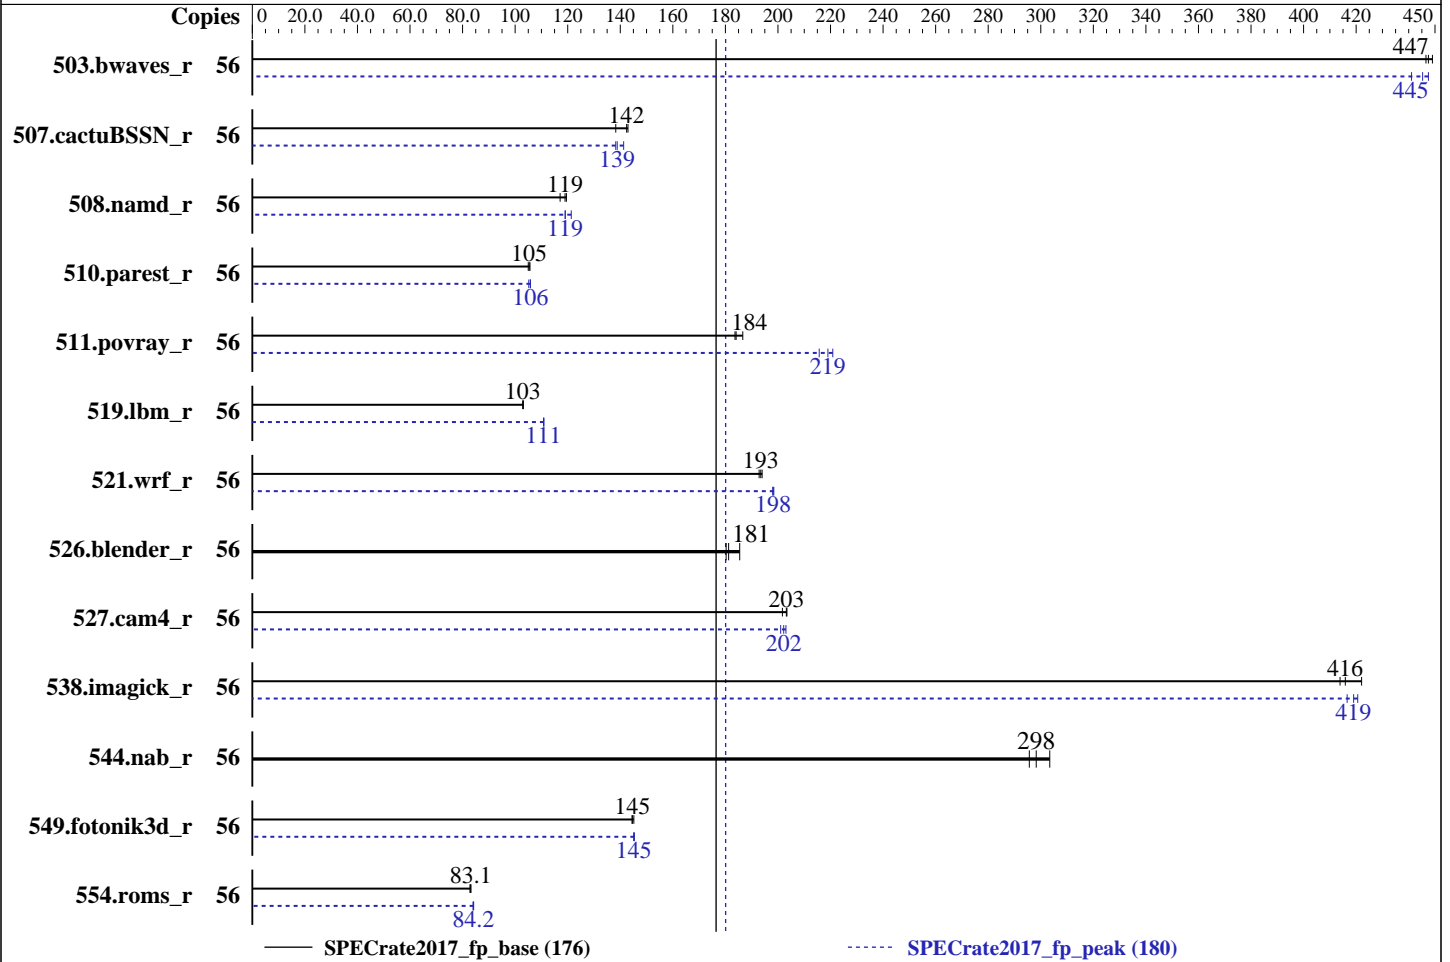

### Hardware

CPU Name: Intel Xeon Gold 6132  
 Max MHz.: 3700  
 Nominal: 2600  
 Enabled: 28 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 19.25 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 240 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.120-94.17-default  
 Compiler: C/C++: Version 18.0.3.222 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.3.222 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 0905 released Mar-2018  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017\_fp\_base = 176

SPECrate2017\_fp\_peak = 180

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	56	1258	447	<b><u>1255</u></b>	<b><u>447</u></b>	1251	449	56	1273	441	<b><u>1261</u></b>	<b><u>445</u></b>	1255	447
507.cactuBSSN_r	56	<b><u>498</u></b>	<b><u>142</u></b>	496	143	513	138	56	513	138	<b><u>511</u></b>	<b><u>139</u></b>	502	141
508.namd_r	56	445	120	<b><u>447</u></b>	<b><u>119</u></b>	454	117	56	447	119	<b><u>447</u></b>	<b><u>119</u></b>	438	121
510.parest_r	56	1387	106	<b><u>1390</u></b>	<b><u>105</u></b>	1395	105	56	<b><u>1385</u></b>	<b><u>106</u></b>	1385	106	1393	105
511.povray_r	56	701	187	<b><u>710</u></b>	<b><u>184</u></b>	712	184	56	606	216	<b><u>597</u></b>	<b><u>219</u></b>	592	221
519.lbm_r	56	<b><u>573</u></b>	<b><u>103</u></b>	572	103	573	103	56	532	111	<b><u>532</u></b>	<b><u>111</u></b>	533	111
521.wrf_r	56	647	194	651	193	<b><u>648</u></b>	<b><u>193</u></b>	56	632	198	634	198	<b><u>633</u></b>	<b><u>198</u></b>
526.blender_r	56	460	185	<b><u>471</u></b>	<b><u>181</u></b>	473	180	56	460	185	<b><u>471</u></b>	<b><u>181</u></b>	473	180
527.cam4_r	56	486	202	<b><u>482</u></b>	<b><u>203</u></b>	481	203	56	<b><u>484</u></b>	<b><u>202</u></b>	482	203	487	201
538.imagick_r	56	330	422	<b><u>335</u></b>	<b><u>416</u></b>	337	414	56	334	417	<b><u>332</u></b>	<b><u>419</u></b>	331	421
544.nab_r	56	311	303	<b><u>316</u></b>	<b><u>298</u></b>	319	296	56	311	303	<b><u>316</u></b>	<b><u>298</u></b>	319	296
549.fotonik3d_r	56	<b><u>1509</u></b>	<b><u>145</u></b>	1511	144	1503	145	56	<b><u>1503</u></b>	<b><u>145</u></b>	1503	145	1501	145
554.roms_r	56	1070	83.2	1075	82.8	<b><u>1071</u></b>	<b><u>83.1</u></b>	56	1060	84.0	<b><u>1057</u></b>	<b><u>84.2</u></b>	1057	84.2

SPECrate2017\_fp\_base = 176

SPECrate2017\_fp\_peak = 180

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017\_fp\_base = 176

SPECrate2017\_fp\_peak = 180

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Configuration:

SNC = Enabled

IMC interleaving = 1 way

Patrol Scrub = Disabled

VT-d = Disabled

ENERGY\_PERF\_BIAS\_CFG mode = Performance

HyperThreading = Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-pmm5 Tue Oct 2 18:30:19 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz

2 "physical id"s (chips)

56 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 14

siblings : 28

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 56

On-line CPU(s) list: 0-55

Thread(s) per core: 2

Core(s) per socket: 14

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017\_fp\_base = 176

SPECrate2017\_fp\_peak = 180

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

### Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
Stepping: 4
CPU MHz: 2601.000
CPU max MHz: 2601.0000
CPU min MHz: 1000.0000
BogoMIPS: 5356.22
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 19712K
NUMA node0 CPU(s): 0-3,7-9,28-31,35-37
NUMA node1 CPU(s): 4-6,10-13,32-34,38-41
NUMA node2 CPU(s): 14-17,21-23,42-45,49-51
NUMA node3 CPU(s): 18-20,24-27,46-48,52-55
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 19712 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 28 29 30 31 35 36 37
node 0 size: 95306 MB
node 0 free: 94760 MB
node 1 cpus: 4 5 6 10 11 12 13 32 33 34 38 39 40 41
node 1 size: 96758 MB
node 1 free: 96275 MB
node 2 cpus: 14 15 16 17 21 22 23 42 43 44 45 49 50 51
node 2 size: 96758 MB
node 2 free: 96246 MB
node 3 cpus: 18 19 20 24 25 26 27 46 47 48 52 53 54 55
node 3 size: 96756 MB
node 3 free: 96064 MB
node distances:
node  0  1  2  3
0:  10  11  21  21

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017\_fp\_base = 176

SPECrate2017\_fp\_peak = 180

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2018

Hardware Availability: Mar-2018

Software Availability: Jun-2018

### Platform Notes (Continued)

```

1:  11  10  21  21
2:  21  21  10  11
3:  21  21  11  10

```

From /proc/meminfo

```

MemTotal:      394834264 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

```

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```

SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3

```

```

# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

uname -a:

```

Linux linux-pmm5 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):      Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

```

run-level 3 Oct 2 09:53

SPEC is set to: /spec2017

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        btrfs    203G  104G   99G  52% /

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0905 03/19/2018  
Memory:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017\_fp\_base = 176

SPECrate2017\_fp\_peak = 180

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2018

**Hardware Availability:** Mar-2018

**Software Availability:** Jun-2018

### Platform Notes (Continued)

12x Kingston D4-26662R4-32G 32 GB 2 rank 2666

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

icc (ICC) 18.0.3 20180410  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 519.lbm\_r(peak)  
-----

icc (ICC) 18.0.3 20180410  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
-----

icpc (ICC) 18.0.3 20180410  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(peak) 510.parest\_r(peak)  
-----

icpc (ICC) 18.0.3 20180410  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

icpc (ICC) 18.0.3 20180410  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.3 20180410  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(peak)  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017\_fp\_base = 176

SPECrate2017\_fp\_peak = 180

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2018

**Hardware Availability:** Mar-2018

**Software Availability:** Jun-2018

### Compiler Version Notes (Continued)

```
icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
FC 507.cactuBSSN_r(base)
```

```
icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
FC 507.cactuBSSN_r(peak)
```

```
icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
```

```
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
FC 554.roms_r(peak)
```

```
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
CC 521.wrf_r(base) 527.cam4_r(base)
```

```
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017\_fp\_base = 176

SPECrate2017\_fp\_peak = 180

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2018

**Hardware Availability:** Mar-2018

**Software Availability:** Jun-2018

## Compiler Version Notes (Continued)

icc (ICC) 18.0.3 20180410

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)

=====  
ifort (IFORT) 18.0.3 20180410

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.3 20180410

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017\_fp\_base = 176

SPECrate2017\_fp\_peak = 180

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2018

**Hardware Availability:** Mar-2018

**Software Availability:** Jun-2018

## Base Portability Flags (Continued)

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017\_fp\_base = 176

SPECrate2017\_fp\_peak = 180

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2018

**Hardware Availability:** Mar-2018

**Software Availability:** Jun-2018

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

```
544.nab_r: basepeak = yes
```

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nonstandard-realloc-lhs -align array32byte
```

```
549.fotonik3d_r: Same as 503.bwaves_r
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017\_fp\_base = 176

SPECrate2017\_fp\_peak = 180

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2018

**Hardware Availability:** Mar-2018

**Software Availability:** Jun-2018

## Peak Optimization Flags (Continued)

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-10-02 06:30:18-0400.

Report generated on 2018-11-27 13:27:59 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-27.