



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 29.3

Thinksystem SR250  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Date: Dec-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2019

Tested by: Lenovo Global Technology

Software Availability: May-2018

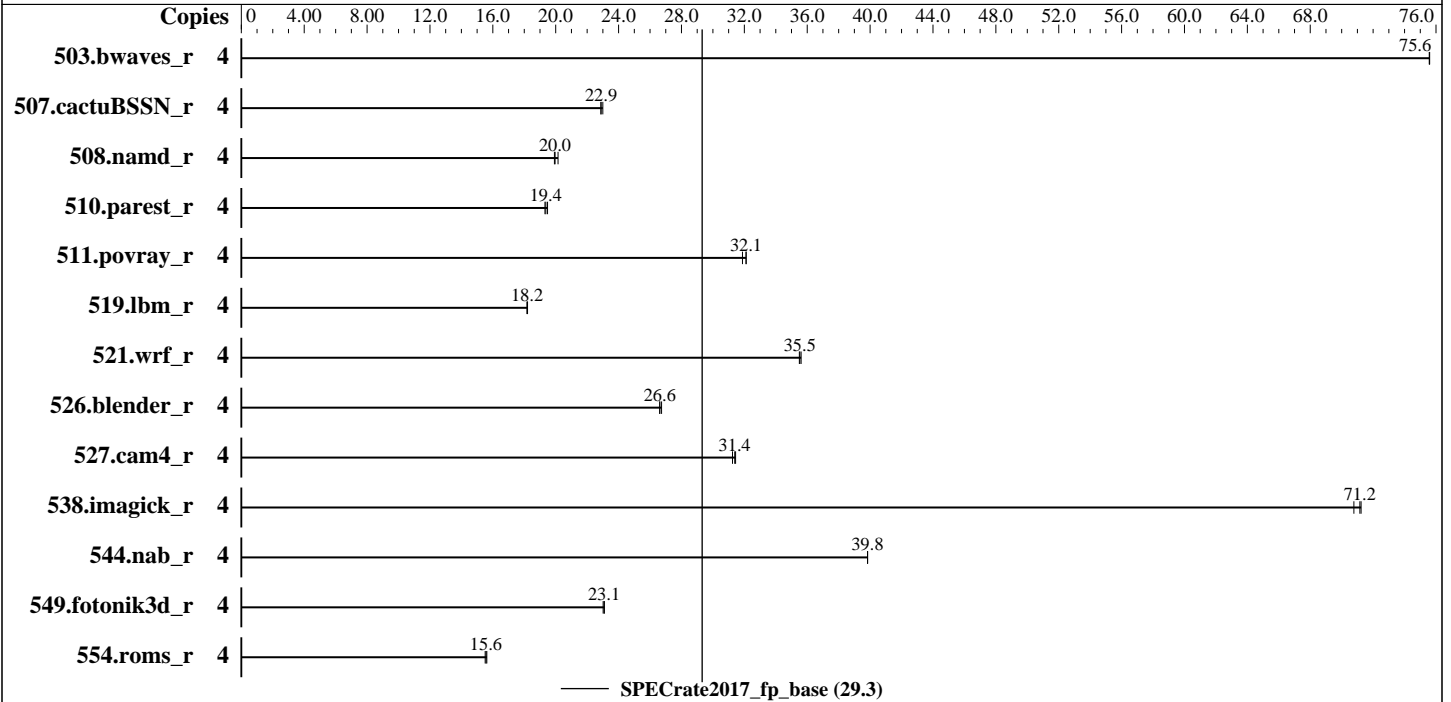

### Hardware

CPU Name: Intel Xeon E-2124  
 Max MHz.: 4300  
 Nominal: 3300  
 Enabled: 4 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 8 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
 Kernel 4.4.131-94.29-default  
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.2.199 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version ISE105G 1.01 released Oct-2018  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 29.3

Thinksystem SR250  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2019

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	4	531	75.6	531	75.6	<u>531</u>	<u>75.6</u>							
507.cactuBSSN_r	4	221	22.9	220	23.0	<u>221</u>	<u>22.9</u>							
508.namd_r	4	189	20.1	<u>190</u>	<u>20.0</u>	191	19.9							
510.parest_r	4	542	19.3	<u>540</u>	<u>19.4</u>	537	19.5							
511.povray_r	4	<u>291</u>	<u>32.1</u>	291	32.1	293	31.9							
519.lbm_r	4	<u>232</u>	<u>18.2</u>	232	18.2	232	18.2							
521.wrf_r	4	252	35.6	<u>252</u>	<u>35.5</u>	252	35.5							
526.blender_r	4	228	26.7	229	26.6	<u>229</u>	<u>26.6</u>							
527.cam4_r	4	224	31.2	<u>223</u>	<u>31.4</u>	222	31.4							
538.imagick_r	4	141	70.8	<u>140</u>	<u>71.2</u>	140	71.2							
544.nab_r	4	169	39.8	<u>169</u>	<u>39.8</u>	169	39.8							
549.fotonik3d_r	4	<u>675</u>	<u>23.1</u>	677	23.0	675	23.1							
554.roms_r	4	<u>408</u>	<u>15.6</u>	410	15.5	407	15.6							

SPECrate2017\_fp\_base = 29.3

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic18.0u2/lib/ia32:/home/cpu2017-1.0.5-ic18.0u2/lib/intel64"

LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017-1.0.5-ic18.0u2/je5.0.1-32:/home/cpu2017-1.0.5-ic18.0u2/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 29.3

Thinksystem SR250  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2018  
**Hardware Availability:** Jan-2019  
**Software Availability:** May-2018

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
Choose Operating Mode set to Custom Mode  
CPU P-state Control set to Legacy  
Execute Disable Bit set to Disable  
Per Core P-state set to Disable  
Adjacent Cache Prefetch set to Disable  
Sysinfo program /home/cpu2017-1.0.5-ic18.0u2/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-ys4m Tue Dec 4 20:39:24 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) E-2124 CPU @ 3.30GHz  
1 "physical id"s (chips)  
4 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 4  
siblings : 4  
physical 0: cores 0 1 2 3

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 4  
On-line CPU(s) list: 0-3  
Thread(s) per core: 1  
Core(s) per socket: 4  
Socket(s): 1  
NUMA node(s): 1  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 158  
Model name: Intel(R) Xeon(R) E-2124 CPU @ 3.30GHz  
Stepping: 10

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 29.3

Thinksystem SR250  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2019

Tested by: Lenovo Global Technology

Software Availability: May-2018

### Platform Notes (Continued)

```

CPU MHz: 4084.275
CPU max MHz: 4300.0000
CPU min MHz: 800.0000
BogoMIPS: 6623.98
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 8192K
NUMA node0 CPU(s): 0-3

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl6c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_notify hwp_act_window hwp_epp intel_pt rsb_ctxsw spec_ctrl stibp ssbd
retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec
xgetbv1

```

```

/proc/cpuinfo cache data
cache size : 8192 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 64382 MB
node 0 free: 63083 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal: 65927396 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*

```

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 29.3

Thinksystem SR250  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2018  
**Hardware Availability:** Jan-2019  
**Software Availability:** May-2018

### Platform Notes (Continued)

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-ys4m 4.4.131-94.29-default #1 SMP Mon May 21 14:41:34 UTC 2018 (f49bc78)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

```
run-level 3 Dec 4 18:18
```

```
SPEC is set to: /home/cpu2017-1.0.5-ic18.0u2
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 btrfs 446G 19G 427G 5% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[ISE105G-1.01]- 10/25/2018
Memory:
4x Micron 18ASF2G72AZ-2G6D1 16 GB 2 rank 2666
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

CXXC 508.namd_r(base) 510.parest_r(base)
-----
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 29.3

Thinksystem SR250  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Dec-2018

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jan-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** May-2018

## Compiler Version Notes (Continued)

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(base) 526.blender\_r(base)

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(base)

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017\_fp\_base = 29.3

Thinksystem SR250  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2019

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 29.3

Thinksystem SR250  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Dec-2018

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jan-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** May-2018

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-12-04 07:39:24-0500.

Report generated on 2018-12-26 13:00:36 by CPU2017 PDF formatter v6067.

Originally published on 2018-12-25.