



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6128
3.40 GHz)

SPECrate2017_int_base = 84.0

SPECrate2017_int_peak = 88.8

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2018

Hardware Availability: Aug-2017

Software Availability: Oct-2018

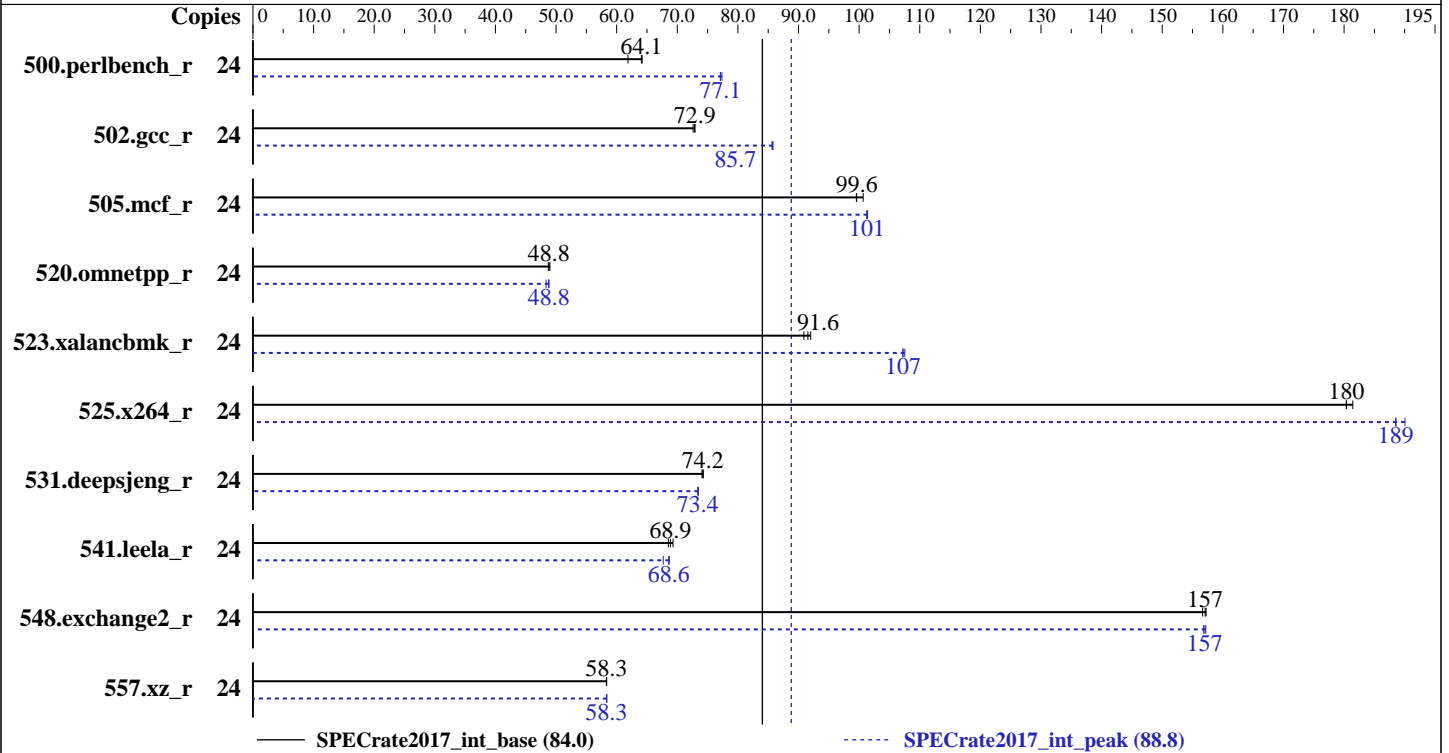

Hardware

CPU Name: Intel Xeon Gold 6128
 Max MHz.: 3700
 Nominal: 3400
 Enabled: 12 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 19.25 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 600 GB SAS HDD,15K RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 4.4.120-92.70-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 4.0.1 released Oct-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6128 3.40 GHz)

SPECrate2017_int_base = 84.0

SPECrate2017_int_peak = 88.8

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Nov-2018
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	24	618	61.9	595	64.2	596	64.1	24	494	77.4	496	77.1	495	77.1
502.gcc_r	24	466	72.9	466	72.9	468	72.6	24	397	85.6	396	85.7	396	85.8
505.mcf_r	24	385	101	389	99.6	390	99.5	24	383	101	383	101	382	101
520.omnetpp_r	24	646	48.7	645	48.8	643	49.0	24	645	48.8	645	48.8	651	48.4
523.xalancbmk_r	24	275	92.0	277	91.6	279	90.9	24	236	108	236	107	236	107
525.x264_r	24	233	180	233	180	232	181	24	223	189	223	189	221	190
531.deepsjeng_r	24	371	74.2	371	74.1	370	74.3	24	374	73.5	375	73.4	375	73.4
541.leela_r	24	573	69.3	577	68.9	580	68.5	24	580	68.6	579	68.7	587	67.7
548.exchange2_r	24	400	157	400	157	401	157	24	400	157	400	157	401	157
557.xz_r	24	444	58.3	444	58.4	445	58.3	24	444	58.3	444	58.3	444	58.4

SPECrate2017_int_base = 84.0

SPECrate2017_int_peak = 88.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6128 3.40 GHz)

SPECrate2017_int_base = 84.0

SPECrate2017_int_peak = 88.8

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2018

Hardware Availability: Aug-2017

Software Availability: Oct-2018

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Enabled

CPU performance set to Enterprise

Power Performance Tuning set to OS Controls

SNC set to Enabled

IMC Interleaving set to 1-way Interleave

Patrol Scrub set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-dkz7 Thu Nov 29 15:32:48 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6128 CPU @ 3.40GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 6 9 10 11 13

physical 1: cores 0 6 9 10 11 13

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 24

On-line CPU(s) list: 0-23

Thread(s) per core: 2

Core(s) per socket: 6

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 6128 CPU @ 3.40GHz

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6128
3.40 GHz)

SPECrate2017_int_base = 84.0

SPECrate2017_int_peak = 88.8

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Nov-2018
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Platform Notes (Continued)

```
Stepping: 4
CPU MHz: 3440.990
CPU max MHz: 3700.0000
CPU min MHz: 1200.0000
BogoMIPS: 6784.05
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 19712K
NUMA node0 CPU(s): 0,2,3,12,14,15
NUMA node1 CPU(s): 1,4,5,13,16,17
NUMA node2 CPU(s): 6,8,9,18,20,21
NUMA node3 CPU(s): 7,10,11,19,22,23
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
retpoline kaiser shadow tpr_shadow vmmi flexpriority ept vpid fsgsbase tsc_adjust bml1 hle
avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 19712 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 2 3 12 14 15
node 0 size: 192097 MB
node 0 free: 190725 MB
node 1 cpus: 1 4 5 13 16 17
node 1 size: 193528 MB
node 1 free: 192232 MB
node 2 cpus: 6 8 9 18 20 21
node 2 size: 193528 MB
node 2 free: 192270 MB
node 3 cpus: 7 10 11 19 22 23
node 3 size: 193525 MB
node 3 free: 192260 MB
node distances:
node 0 1 2 3
0: 10 11 21 21
1: 11 10 21 21
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6128
3.40 GHz)

SPECrate2017_int_base = 84.0

SPECrate2017_int_peak = 88.8

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Nov-2018
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Platform Notes (Continued)

```
2: 21 21 10 11
3: 21 21 11 10
```

From /proc/meminfo

```
MemTotal: 791225060 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
```

```
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-dkz7 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 29 09:49

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   500G  121G  380G  25% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C240M5.4.0.1.139.1003182220 10/03/2018

Memory:

```
12x 0xCE00 M393A4K40BB2-CTD 32 GB 2 rank 2666
12x 0xCE00 M393A4K40CB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6128
3.40 GHz)

SPECrate2017_int_base = 84.0

SPECrate2017_int_peak = 88.8

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2018

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
    525.x264_r(base, peak) 557.xz_r(base, peak)
-----
```

```
icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----
```

```
icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
    541.leela_r(base)
-----
```

```
icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
    541.leela_r(peak)
-----
```

```
icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
-----
```

```
ifort (IFORT) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6128
3.40 GHz)

SPECrate2017_int_base = 84.0

SPECrate2017_int_peak = 88.8

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2018

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/opt/intel/lib/ia32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6128
3.40 GHz)

SPECrate2017_int_base = 84.0

SPECrate2017_int_peak = 88.8

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2018

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Peak Compiler Invocation (Continued)

523.xalancbmk_r: icpc -m32 -L/opt/intel/lib/ia32

Fortran benchmarks:

ifort -m64

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/home/cpu2017/je5.0.1-64/
-ljemalloc
502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/home/cpu2017/je5.0.1-32/ -ljemalloc
505.mcf_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/home/cpu2017/je5.0.1-64/
-ljemalloc
525.x264_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/home/cpu2017/je5.0.1-64/ -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6128
3.40 GHz)

SPECrate2017_int_base = 84.0

SPECrate2017_int_peak = 88.8

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2018

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Peak Optimization Flags (Continued)

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

```
523.xalancbmk_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/home/cpu2017/je5.0.1-32/ -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-11-29 18:32:47-0500.

Report generated on 2018-12-26 13:07:20 by CPU2017 PDF formatter v6067.

Originally published on 2018-12-25.