



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 237

PowerEdge R840 (Intel Xeon Gold 5117, 2.00GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55


Test Date: Jan-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

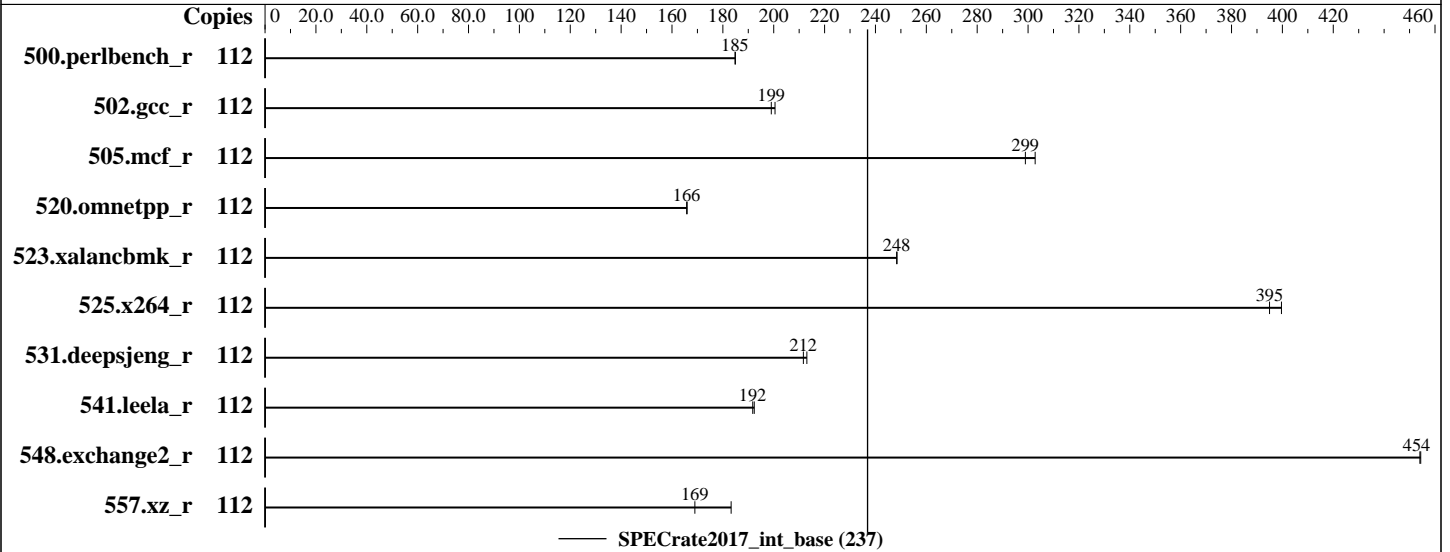

## Hardware

CPU Name: Intel Xeon Gold 5117  
 Max MHz.: 2800  
 Nominal: 2000  
 Enabled: 56 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 19.25 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)  
 Storage: 1 x 400 GB SATA SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP3  
 kernel 4.4.126-94.22-default  
 Compiler: C/C++: Version 18.0.2.20180210 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.2.20180210 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 1.2.4 released Oct-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator v5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 237

PowerEdge R840 (Intel Xeon Gold 5117, 2.00GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2019  
Hardware Availability: Oct-2018  
Software Availability: Apr-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	964	185	<b><u>965</u></b>	<b><u>185</u></b>									
502.gcc_r	112	791	201	<b><u>797</u></b>	<b><u>199</u></b>									
505.mcf_r	112	598	303	<b><u>605</u></b>	<b><u>299</u></b>									
520.omnetpp_r	112	<b><u>886</u></b>	<b><u>166</u></b>	885	166									
523.xalancbmk_r	112	476	248	<b><u>476</u></b>	<b><u>248</u></b>									
525.x264_r	112	<b><u>497</u></b>	<b><u>395</u></b>	491	400									
531.deepsjeng_r	112	602	213	<b><u>606</u></b>	<b><u>212</u></b>									
541.leela_r	112	<b><u>967</u></b>	<b><u>192</u></b>	964	192									
548.exchange2_r	112	646	454	<b><u>646</u></b>	<b><u>454</u></b>									
557.xz_r	112	660	183	<b><u>716</u></b>	<b><u>169</u></b>									

SPECrate2017\_int\_base = 237

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 237

PowerEdge R840 (Intel Xeon Gold 5117, 2.00GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2019

Hardware Availability: Oct-2018

Software Availability: Apr-2018

## General Notes (Continued)

numactl --interleave=all runcpu <etc>

Dell PowerEdge R840 and PowerEdge R940xa are electronically equivalent.

This result was measured on Dell PowerEdge R840.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-h835 Thu Jan 3 23:32:25 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5117 CPU @ 2.00GHz

4 "physical id"s (chips)

112 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 14

siblings : 28

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

From lscpu:

Architecture: x86\_64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 237

PowerEdge R840 (Intel Xeon Gold 5117, 2.00GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55

Test Date: Jan-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Platform Notes (Continued)

```

CPU op-mode(s):      32-bit, 64-bit
Byte Order:          Little Endian
CPU(s):              112
On-line CPU(s) list: 0-111
Thread(s) per core: 2
Core(s) per socket: 14
Socket(s):           4
NUMA node(s):        8
Vendor ID:           GenuineIntel
CPU family:           6
Model:                85
Model name:          Intel(R) Xeon(R) Gold 5117 CPU @ 2.00GHz
Stepping:             4
CPU MHz:              1995.322
BogoMIPS:             3990.64
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:             1024K
L3 cache:            19712K
NUMA node0 CPU(s):   0,8,16,24,32,40,48,56,64,72,80,88,96,104
NUMA node1 CPU(s):   1,9,17,25,33,41,49,57,65,73,81,89,97,105
NUMA node2 CPU(s):   2,10,18,26,34,42,50,58,66,74,82,90,98,106
NUMA node3 CPU(s):   3,11,19,27,35,43,51,59,67,75,83,91,99,107
NUMA node4 CPU(s):   4,12,20,28,36,44,52,60,68,76,84,92,100,108
NUMA node5 CPU(s):   5,13,21,29,37,45,53,61,69,77,85,93,101,109
NUMA node6 CPU(s):   6,14,22,30,38,46,54,62,70,78,86,94,102,110
NUMA node7 CPU(s):   7,15,23,31,39,47,55,63,71,79,87,95,103,111
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 19712 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104
node 0 size: 95231 MB

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 237

PowerEdge R840 (Intel Xeon Gold 5117, 2.00GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2019

Hardware Availability: Oct-2018

Software Availability: Apr-2018

## Platform Notes (Continued)

```

node 0 free: 95064 MB
node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105
node 1 size: 96761 MB
node 1 free: 96620 MB
node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106
node 2 size: 96761 MB
node 2 free: 96618 MB
node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107
node 3 size: 96761 MB
node 3 free: 96633 MB
node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108
node 4 size: 96761 MB
node 4 free: 96607 MB
node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109
node 5 size: 96761 MB
node 5 free: 96630 MB
node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110
node 6 size: 96761 MB
node 6 free: 96630 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111
node 7 size: 96759 MB
node 7 free: 96610 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 21 31 21 11 21 31 21
  1: 21 10 21 31 21 11 21 31
  2: 31 21 10 21 31 21 11 21
  3: 21 31 21 10 21 31 21 11
  4: 11 21 31 21 10 21 31 21
  5: 21 11 21 31 21 10 21 31
  6: 31 21 11 21 31 21 10 21
  7: 21 31 21 11 21 31 21 10

```

From /proc/meminfo

```

MemTotal:      791102412 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP3

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```

SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3

```

# This file is deprecated and will be removed in a future service pack or release.

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 237

PowerEdge R840 (Intel Xeon Gold 5117, 2.00GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55

Test Date: Jan-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Platform Notes (Continued)

# Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-h835 4.4.126-94.22-default #1 SMP Wed Apr 11 07:45:03 UTC 2018 (9649989)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

run-level 3 Jan 3 22:10

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   405G   36G  370G   9% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.2.4 10/18/2018

Memory:

```
36x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666, configured at 2400
10x 00AD063200AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666, configured at 2400
2x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666, configured at 2400
```

(End of data from sysinfo program)

## Compiler Version Notes

```
====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
   557.xz_r(base)
-----
```

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 237

PowerEdge R840 (Intel Xeon Gold 5117, 2.00GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55

Test Date: Jan-2019

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Compiler Version Notes (Continued)

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
```

```
-----
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
FC 548.exchange2_r(base)
```

```
-----
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 237

PowerEdge R840 (Intel Xeon Gold 5117, 2.00GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2019

Hardware Availability: Oct-2018

Software Availability: Apr-2018

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.2018-07-24.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.2018-07-24.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-01-04 00:32:24-0500.

Report generated on 2019-01-22 16:47:13 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-22.