



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029BT-DNC0R (X11DPT-B, Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

CPU2017 License: 001176


Test Date: Mar-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Feb-2019

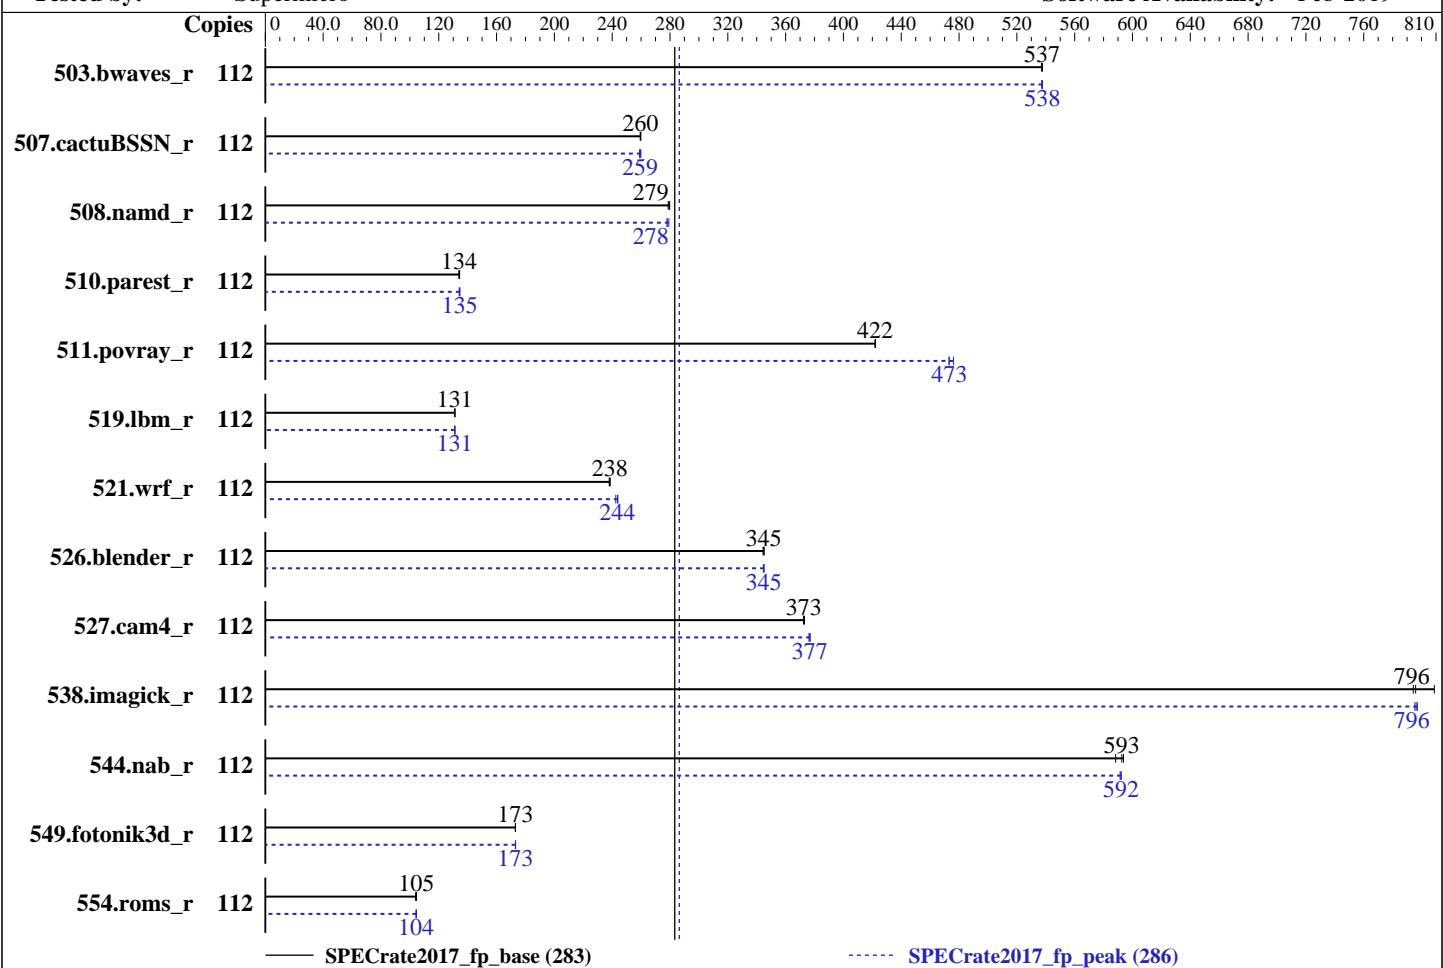

— SPECrate2017_fp_base (283)

----- SPECrate2017_fp_peak (286)

Hardware

CPU Name: Intel Xeon Platinum 8280
 Max MHz.: 4000
 Nominal: 2700
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB
 (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 2 TB NVMe SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4
 4.12.14-94.41-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
 Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran
 Compiler Build 20181018 for Linux
 Parallel: No
 Firmware: Supermicro BIOS version 3.0a released Mar-2019 tested as Feb-2019
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029BT-DNC0R (X11DPT-B, Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

CPU2017 License: 001176

Test Date: Mar-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Feb-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	2091	537	2090	537	2089	538	112	2089	538	2089	538	2091	537		
507.cactusBSSN_r	112	546	260	547	259	546	260	112	547	259	548	259	546	260		
508.namd_r	112	381	279	382	279	380	280	112	383	278	383	278	381	279		
510.parest_r	112	2183	134	2187	134	2179	134	112	2185	134	2177	135	2178	135		
511.povray_r	112	620	422	619	422	620	422	112	553	473	553	473	549	476		
519.lbm_r	112	900	131	900	131	900	131	112	900	131	900	131	900	131		
521.wrf_r	112	1054	238	1051	239	1053	238	112	1035	242	1028	244	1030	244		
526.blender_r	112	494	345	495	345	495	344	112	494	345	495	345	495	345		
527.cam4_r	112	526	373	525	373	526	372	112	520	377	520	377	521	376		
538.imagick_r	112	344	809	350	796	351	794	112	350	796	349	797	350	795		
544.nab_r	112	318	593	320	588	317	594	112	319	591	318	592	318	592		
549.fotonik3d_r	112	2522	173	2523	173	2522	173	112	2523	173	2521	173	2521	173		
554.roms_r	112	1712	104	1702	105	1701	105	112	1705	104	1707	104	1702	105		

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029BT-DNC0R (X11DPT-B, Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Platform Notes

BIOS Settings:

SNC = Enable

IMC Interleave = 1-Way

Monitor/Mwait = Disable

Power Technology = Custom

Power Performance Tuning = BIOS Control EPB

Energy PERF BIAS CFG mode = Extreme Performance

Hardware P-state = Native Mode

XPT Prefetch = Enable

KTI Prefetch = Disable

Stale AtoS = Disable

LLC dead line alloc = Disable

Local/Remote Threshold = Medium

Patrol Scrub = Disable

```
Sysinfo program /root/cpu2017/bin/sysinfo
```

```
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
```

```
running on 200-223 Sat Mar 9 05:26:57 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
```

```
 2 "physical id"s (chips)
```

```
 112 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 28
```

```
siblings : 56
```

```
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30
```

```
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30
```

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029BT-DNC0R (X11DPT-B, Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

CPU2017 License: 001176

Test Date: Mar-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Feb-2019

Platform Notes (Continued)

```

Byte Order: Little Endian
CPU(s): 112
On-line CPU(s) list: 0-111
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping: 7
CPU MHz: 2700.000
CPU max MHz: 4000.0000
CPU min MHz: 1000.0000
BogoMIPS: 5400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
NUMA node2 CPU(s): 28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
NUMA node3 CPU(s): 32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqmq mpq rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
79
node 0 size: 192095 MB
node 0 free: 177085 MB
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029BT-DNC0R (X11DPT-B, Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

CPU2017 License: 001176

Test Date: Mar-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Feb-2019

Platform Notes (Continued)

```
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
82 83
node 1 size: 193520 MB
node 1 free: 182005 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
101 105 106 107
node 2 size: 193520 MB
node 2 free: 182093 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
108 109 110 111
node 3 size: 193488 MB
node 3 free: 182140 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

From /proc/meminfo
MemTotal:      791168432 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP4"
    VERSION_ID="12.4"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
Linux 200-223 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029BT-DNC0R (X11DPT-B, Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

run-level 3 Mar 8 21:05

SPEC is set to: /root/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	btrfs	1.9T	79G	1.8T	5%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.0a 02/20/2019

Memory:

24x SK Hynix HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 519.lbm_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(base) 510.parest_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029BT-DNC0R (X11DPT-B, Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029BT-DNC0R (X11DPT-B, Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

```
=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 554.roms_r(peak)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

-----
CC 521.wrf_r(peak) 527.cam4_r(peak)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029BT-DNC0R (X11DPT-B, Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

CPU2017 License: 001176

Test Date: Mar-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Feb-2019

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029BT-DNC0R (X11DPT-B, Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029BT-DNC0R (X11DPT-B, Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

```
544.nab_r: Same as 538.imagick_r
```

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

```
549.fotonik3d_r: Same as 503.bwaves_r
```

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2029BT-DNC0R (X11DPT-B, Intel Xeon Platinum 8280)

SPECrate2017_fp_base = 283

SPECrate2017_fp_peak = 286

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Peak Optimization Flags (Continued)

526.blender_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html>
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-03-09 08:26:56-0500.

Report generated on 2019-04-02 16:55:05 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-02.