



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate®2017_int_base = 282

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3


Test Date: Mar-2019

Test Sponsor: HPE

Hardware Availability: Jun-2018

Tested by: HPE

Software Availability: Nov-2018

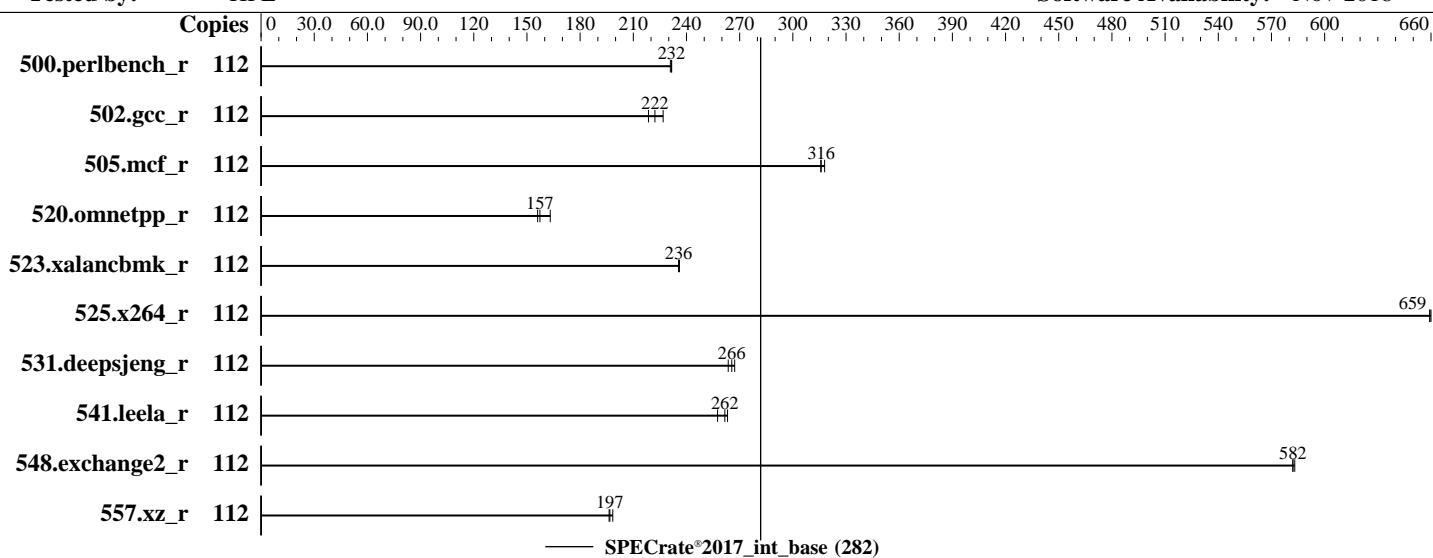

Hardware

CPU Name: Intel Xeon Platinum 8180
 Max MHz: 3800
 Nominal: 2500
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)
 Storage: 2 x 400 GB SAS SSD, RAID 1
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP3
 Compiler: Kernel 4.4.162-94.72-default
 C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: HPE BIOS Version U30 06/15/2018 released Jun-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: --



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate®2017_int_base = 282

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Jun-2018

Software Availability: Nov-2018

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	770	232	770	232	772	231									
502.gcc_r	112	699	227	714	222	726	219									
505.mcf_r	112	569	318	573	316	573	316									
520.omnetpp_r	112	901	163	934	157	942	156									
523.xalancbmk_r	112	502	236	501	236	502	236									
525.x264_r	112	297	659	297	660	297	659									
531.deepsjeng_r	112	480	267	483	266	487	264									
541.leela_r	112	709	262	705	263	720	258									
548.exchange2_r	112	504	582	503	583	504	582									
557.xz_r	112	610	198	615	197	616	196									

SPECrate®2017_int_base = 282

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate®2017_int_base = 282

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Jun-2018

Software Availability: Nov-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Memory Patrol Scrubbing set to Disabled

LLC Dead Line Allocation set to Disabled

LLC Prefetch set to Enabled

Thermal Configuration set to Maximum Cooling

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C1E

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-18sg Fri Mar 15 09:16:22 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz

2 "physical id"s (chips)

112 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 56

physical 0: cores 0 1 2 3 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29
30

physical 1: cores 0 1 2 3 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29
30

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 112

On-line CPU(s) list: 0-111

Thread(s) per core: 2

Core(s) per socket: 28

Socket(s): 2

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate®2017_int_base = 282

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3

Test Date: Mar-2019

Test Sponsor: HPE

Hardware Availability: Jun-2018

Tested by: HPE

Software Availability: Nov-2018

Platform Notes (Continued)

```

NUMA node(s):          4
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
Stepping:              4
CPU MHz:              2494.139
BogoMIPS:             4988.27
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:              1024K
L3 cache:              39424K
NUMA node0 CPU(s):    0-13,56-69
NUMA node1 CPU(s):    14-27,70-83
NUMA node2 CPU(s):    28-41,84-97
NUMA node3 CPU(s):    42-55,98-111
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                       pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                       lm ibrs constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
                       aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
                       fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                       xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
                       dtherm intel_pt ibpb stibp kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase
                       tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed
                       adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc
                       cqm_occup_llc pku ospke

```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 56 57 58 59 60 61 62 63 64 65 66 67 68 69
node 0 size: 96263 MB
node 0 free: 86483 MB
node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 1 size: 96763 MB
node 1 free: 84915 MB
node 2 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 84 85 86 87 88 89 90 91 92 93 94
95 96 97
node 2 size: 96763 MB
node 2 free: 91354 MB
node 3 cpus: 42 43 44 45 46 47 48 49 50 51 52 53 54 55 98 99 100 101 102 103 104 105
106 107 108 109 110 111

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate®2017_int_base = 282

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Jun-2018

Software Availability: Nov-2018

Platform Notes (Continued)

```
node 3 size: 96620 MB
node 3 free: 91221 MB
node distances:
node   0   1   2   3
 0: 10  21  31  31
 1: 21  10  31  31
 2: 31  31  10  21
 3: 31  31  21  10

From /proc/meminfo
MemTotal:      395684960 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux linux-18sg 4.4.162-94.72-default #1 SMP Mon Nov 12 18:57:45 UTC 2018 (9de753f)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):           Mitigation: PTI
CVE-2017-5753 (Spectre variant 1):  Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):  Mitigation: IBRS+IBPB, IBPB, IBRS_FW, STIBP, RSB
filling

run-level 3 Mar 15 06:49

SPEC is set to: /home/cpu2017
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate®2017_int_base = 282

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Jun-2018

Software Availability: Nov-2018

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	331G	30G	301G	9%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 06/15/2018

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====

C	500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
	525.x264_r(base) 557.xz_r(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

C++	520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
	541.leela_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

Fortran	548.exchange2_r(base)
---------	-----------------------

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate®2017_int_base = 282

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Jun-2018

Software Availability: Nov-2018

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=3 -L/usr/local/jet5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=3 -L/usr/local/jet5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=3 -fno-standard-realloc-lhs -align array32byte
-L/usr/local/jet5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revJ.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate®2017_int_base = 282

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Jun-2018

Software Availability: Nov-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revJ.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-03-15 09:16:21-0400.

Report generated on 2020-06-08 11:52:08 by CPU2017 PDF formatter v6255.

Originally published on 2019-05-03.