



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_int\_base = 24.3

SPECrate2017\_int\_peak = 25.6

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2019

Hardware Availability: Feb-2019

Software Availability: Nov-2018

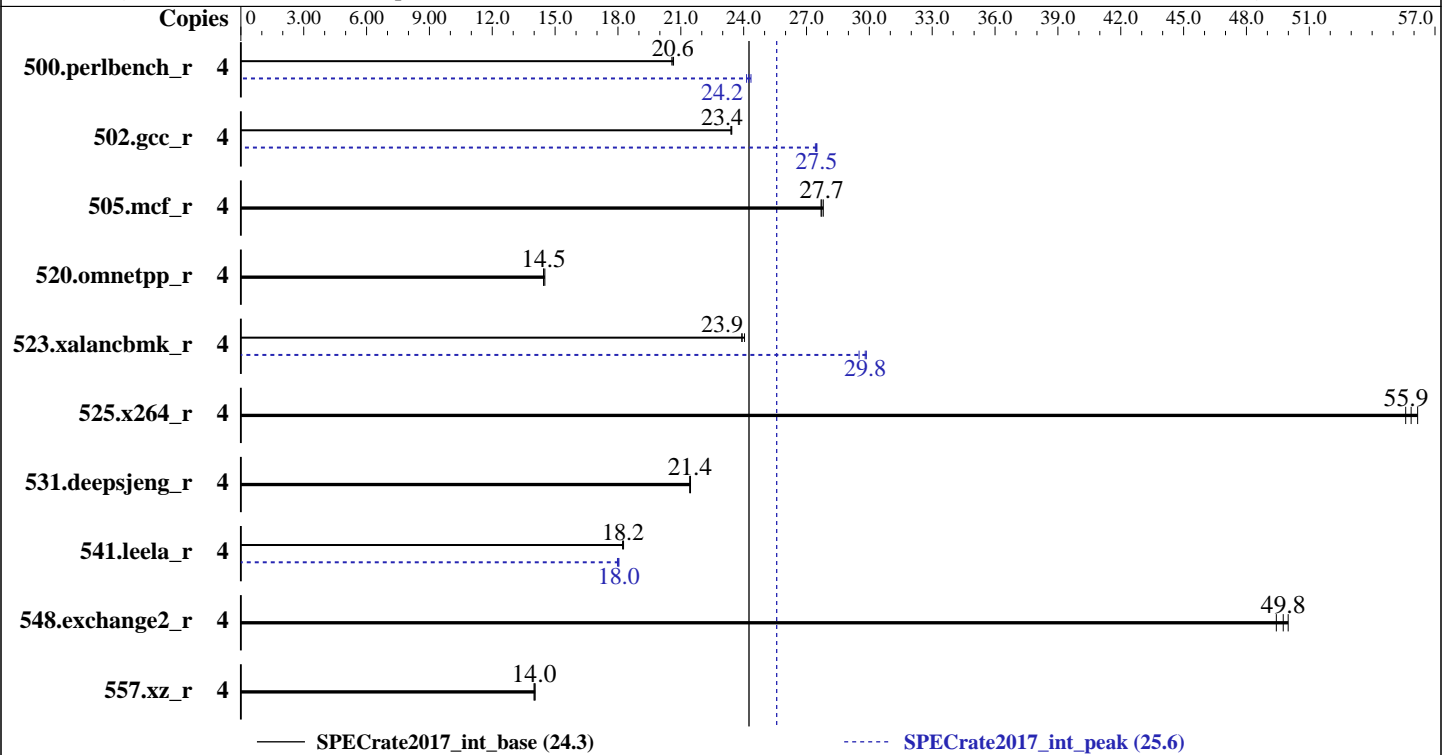

### Hardware

CPU Name: Intel Xeon E-2124  
 Max MHz.: 4300  
 Nominal: 3300  
 Enabled: 4 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 8 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)  
 Storage: 1 x 500 GB SATA HDD, 7200RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.120-94.17-default  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 0502 released Feb-2019  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_int\_base = 24.3

SPECrate2017\_int\_peak = 25.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2019

Hardware Availability: Feb-2019

Software Availability: Nov-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	4	308	20.7	<b>309</b>	<b>20.6</b>	310	20.6	4	<b>263</b>	<b>24.2</b>	262	24.3	264	24.1
502.gcc_r	4	242	23.4	242	23.4	<b>242</b>	<b>23.4</b>	4	207	27.4	206	27.5	<b>206</b>	<b>27.5</b>
505.mcf_r	4	<b>233</b>	<b>27.7</b>	233	27.7	233	27.8	4	<b>233</b>	<b>27.7</b>	233	27.7	233	27.8
520.omnetpp_r	4	363	14.4	362	14.5	<b>363</b>	<b>14.5</b>	4	363	14.4	362	14.5	<b>363</b>	<b>14.5</b>
523.xalancbmk_r	4	177	23.9	<b>177</b>	<b>23.9</b>	176	24.0	4	141	29.9	143	29.5	<b>142</b>	<b>29.8</b>
525.x264_r	4	125	56.2	<b>125</b>	<b>55.9</b>	126	55.6	4	125	56.2	<b>125</b>	<b>55.9</b>	126	55.6
531.deepsjeng_r	4	<b>214</b>	<b>21.4</b>	214	21.5	214	21.4	4	<b>214</b>	<b>21.4</b>	214	21.5	214	21.4
541.leela_r	4	364	18.2	363	18.3	<b>363</b>	<b>18.2</b>	4	<b>367</b>	<b>18.0</b>	368	18.0	367	18.0
548.exchange2_r	4	210	50.0	<b>211</b>	<b>49.8</b>	212	49.4	4	210	50.0	<b>211</b>	<b>49.8</b>	212	49.4
557.xz_r	4	307	14.0	<b>309</b>	<b>14.0</b>	309	14.0	4	307	14.0	<b>309</b>	<b>14.0</b>	309	14.0

SPECrate2017\_int\_base = 24.3

SPECrate2017\_int\_peak = 25.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/spec2017_2019ul/lib/ia32:/spec2017_2019ul/lib/intel64:/spec2017_2019ul/je5.0.1-32:/spec2017_2019ul/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc: configured and built at default for

32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or

<https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_int\_base = 24.3

SPECrate2017\_int\_peak = 25.6

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2019

**Hardware Availability:** Feb-2019

**Software Availability:** Nov-2018

### General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Configuration:

VT-d = Disabled

AES = Disabled

Hardware Prefetcher = Disabled

Adjacent Cache Line Prefetch = Disabled

Race to Halt (RTH) = Disabled

Sysinfo program /spec2017\_2019u1/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-pmm5 Thu Apr 11 14:21:58 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) E-2124 CPU @ 3.30GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 4

On-line CPU(s) list: 0-3

Thread(s) per core: 1

Core(s) per socket: 4

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

Model: 158

Model name: Intel(R) Xeon(R) E-2124 CPU @ 3.30GHz

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_int\_base = 24.3

SPECrate2017\_int\_peak = 25.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2019

Hardware Availability: Feb-2019

Software Availability: Nov-2018

### Platform Notes (Continued)

```
Stepping:          10
CPU MHz:           4154.372
CPU max MHz:       4300.0000
CPU min MHz:       800.0000
BogoMIPS:          6623.96
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          256K
L3 cache:          8192K
NUMA node0 CPU(s): 0-3
```

```
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm
hwp hwp_notify hwp_act_window hwp_epp intel_pt rsb_ctxsw spec_ctrl stibp retpoline
kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep
bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1
```

```
/proc/cpuinfo cache data
cache size : 8192 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 64315 MB
node 0 free: 63803 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal:      65859564 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
```

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_int\_base = 24.3

SPECrate2017\_int\_peak = 25.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2019

Hardware Availability: Feb-2019

Software Availability: Nov-2018

## Platform Notes (Continued)

```

NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

uname -a:

```

Linux linux-pmm5 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

```

run-level 3 Apr 11 14:17

SPEC is set to: /spec2017\_2019ul

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda2        btrfs    445G     116G   328G   27% /

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0502 02/26/2019

Memory:

4x Samsung M391A2K43BB1-CTD 16 GB 2 rank 2667, configured at 2666

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
   525.x264_r(base, peak) 557.xz_r(base, peak)
=====

```

icc (ICC) 19.0.1.144 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
=====

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_int\_base = 24.3

SPECrate2017\_int\_peak = 25.6

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2019

**Hardware Availability:** Feb-2019

**Software Availability:** Nov-2018

## Compiler Version Notes (Continued)

-----  
icc (ICC) 19.0.1.144 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base)  
-----

icpc (ICC) 19.0.1.144 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 523.xalanbmk\_r(peak) 541.leela\_r(peak)  
-----

icpc (ICC) 19.0.1.144 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base, peak)  
-----

ifort (IFORT) 19.0.1.144 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_int\_base = 24.3

SPECrate2017\_int\_peak = 25.6

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2019

**Hardware Availability:** Feb-2019

**Software Availability:** Nov-2018

## Base Portability Flags (Continued)

520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64 -std=c11

502 gcc\_r: icc -m32 -std=c11 -L/home/prasadj/specdev/IC18u2\_Internal/lin\_18\_0\_20180210/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m64

523.xalancbmk\_r: icpc -m32 -L/home/prasadj/specdev/IC18u2\_Internal/lin\_18\_0\_20180210/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_int\_base = 24.3

SPECrate2017\_int\_peak = 25.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2019

Hardware Availability: Feb-2019

Software Availability: Nov-2018

## Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

```

```

502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

```

505.mcf\_r: basepeak = yes

525.x264\_r: basepeak = yes

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```

523.xalancbmk_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

```

531.deepsjeng\_r: basepeak = yes

```

541.leela_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2124)

SPECrate2017\_int\_base = 24.3

SPECrate2017\_int\_peak = 25.6

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2019

**Hardware Availability:** Feb-2019

**Software Availability:** Nov-2018

## Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p11-V2.0-revA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p11-V2.0-revA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-04-11 02:21:57-0400.

Report generated on 2019-05-15 13:20:16 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-14.