



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 8049U-E1CR4T  
(X11QPH+, Intel Xeon Gold 6230)

SPECrate®2017\_int\_base = 446

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

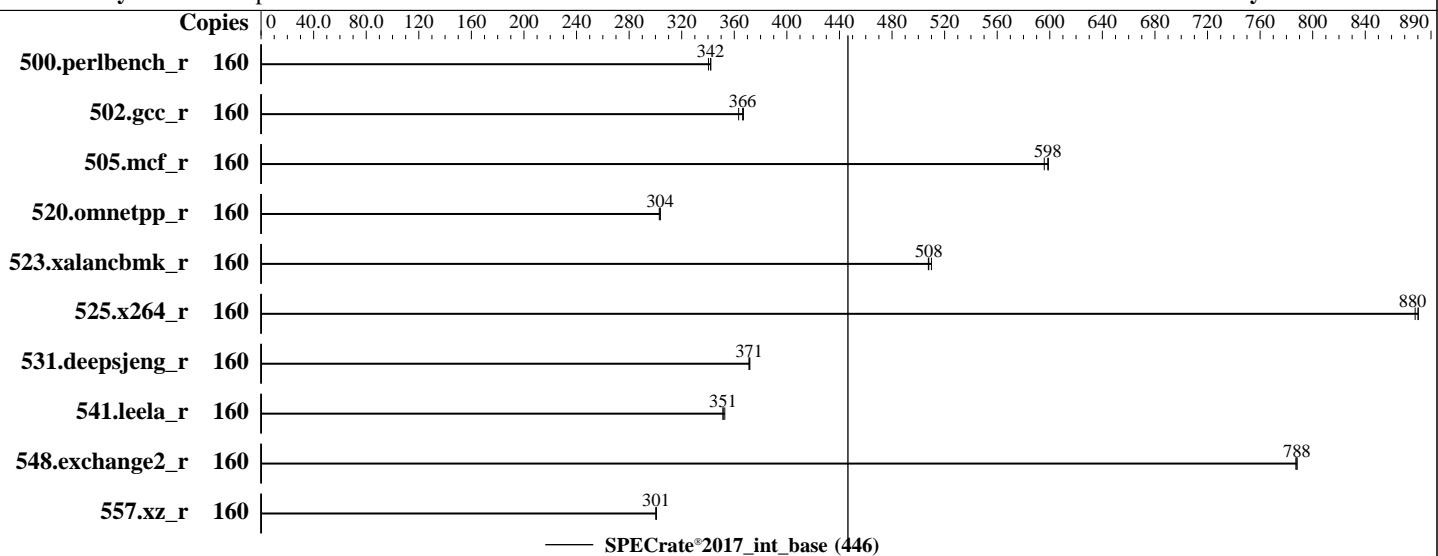

### Hardware

CPU Name: Intel Xeon Gold 6230  
Max MHz: 3900  
Nominal: 2100  
Enabled: 80 cores, 4 chips, 2 threads/core  
Orderable: 1,2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 27.5 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 240 GB SATA 3 SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4  
4.12.14-94.41-default  
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
Compiler Build 20181018 for Linux;  
Fortran: Version 19.0.1.144 of Intel Fortran  
Compiler Build 20181018 for Linux  
Parallel: No  
Firmware: version 3.1 released May-2019  
File System: xfs  
System State: Run level 3 (Multi-user mode with networking)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 8049U-E1CR4T  
(X11QPH+, Intel Xeon Gold 6230)

SPECrate®2017\_int\_base = 446

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Aug-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Dec-2018

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	745	342	<b>745</b>	<b>342</b>	748	340									
502.gcc_r	160	<b>618</b>	<b>366</b>	617	367	624	363									
505.mcf_r	160	432	599	<b>432</b>	<b>598</b>	434	596									
520.omnetpp_r	160	<b>691</b>	<b>304</b>	691	304	693	303									
523.xalancbmk_r	160	<b>333</b>	<b>508</b>	333	508	331	510									
525.x264_r	160	319	878	<b>318</b>	<b>880</b>	318	880									
531.deepsjeng_r	160	494	371	493	372	<b>494</b>	<b>371</b>									
541.leela_r	160	<b>754</b>	<b>351</b>	754	351	751	353									
548.exchange2_r	160	532	788	533	787	<b>532</b>	<b>788</b>									
557.xz_r	160	575	301	575	300	<b>575</b>	<b>301</b>									

SPECrate®2017\_int\_base = 446

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 8049U-E1CR4T  
(X11QPH+, Intel Xeon Gold 6230)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 446

SPECrate®2017\_int\_peak = Not Run

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Monitor/Mwait = Disabled

Energy Performance BIAS Setting = Max Performance

ADDDC Sparing = Disabled

SNC = Enabled

Stale Atos = Disabled

IMC Interleaving = 1-way Interleave

Patrol Scrub = Disabled

Intel Virtualization Technology = Disabled

Enhanced Halt State (C1E) = Disable

LLC Dead Line Alloc = Disable

Super Performance Mode = Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux Mon Aug 19 18:13:49 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz

4 "physical id"s (chips)

160 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 160

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 8049U-E1CR4T  
(X11QPH+, Intel Xeon Gold 6230)

SPECrate®2017\_int\_base = 446

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Aug-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Dec-2018

## Platform Notes (Continued)

On-line CPU(s) list: 0-159  
Thread(s) per core: 2  
Core(s) per socket: 20  
Socket(s): 4  
NUMA node(s): 8  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz  
Stepping: 6  
CPU MHz: 2100.000  
CPU max MHz: 3900.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4200.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 28160K  
NUMA node0 CPU(s): 0-2,5,6,10-12,15,16,80-82,85,86,90-92,95,96  
NUMA node1 CPU(s): 3,4,7-9,13,14,17-19,83,84,87-89,93,94,97-99  
NUMA node2 CPU(s): 20-22,25,26,30-32,35,36,100-102,105,106,110-112,115,116  
NUMA node3 CPU(s): 23,24,27-29,33,34,37-39,103,104,107-109,113,114,117-119  
NUMA node4 CPU(s): 40-42,45,46,50-52,55,56,120-122,125,126,130-132,135,136  
NUMA node5 CPU(s): 43,44,47-49,53,54,57-59,123,124,127-129,133,134,137-139  
NUMA node6 CPU(s): 60-62,65,66,70-72,75,76,140-142,145,146,150-152,155,156  
NUMA node7 CPU(s): 63,64,67-69,73,74,77-79,143,144,147-149,153,154,157-159  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtTopology nonstop\_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrandlahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpq rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq\_llc cqmq\_occup\_llc cqmq\_mbm\_total cqmq\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni flush\_lll arch\_capabilities

/proc/cpuinfo cache data  
cache size : 28160 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 80 81 82 85 86 90 91 92 95 96  
node 0 size: 192115 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 8049U-E1CR4T  
(X11QPH+, Intel Xeon Gold 6230)

SPECrate®2017\_int\_base = 446

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Aug-2019

Test Sponsor: Supermicro

Hardware Availability: Apr-2019

Tested by: Supermicro

Software Availability: Dec-2018

## Platform Notes (Continued)

```
node 0 free: 191722 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 83 84 87 88 89 93 94 97 98 99
node 1 size: 193526 MB
node 1 free: 193303 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 100 101 102 105 106 110 111 112 115 116
node 2 size: 193526 MB
node 2 free: 193333 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 103 104 107 108 109 113 114 117 118 119
node 3 size: 193526 MB
node 3 free: 193344 MB
node 4 cpus: 40 41 42 45 46 50 51 52 55 56 120 121 122 125 126 130 131 132 135 136
node 4 size: 193526 MB
node 4 free: 193350 MB
node 5 cpus: 43 44 47 48 49 53 54 57 58 59 123 124 127 128 129 133 134 137 138 139
node 5 size: 193526 MB
node 5 free: 193343 MB
node 6 cpus: 60 61 62 65 66 70 71 72 75 76 140 141 142 145 146 150 151 152 155 156
node 6 size: 193498 MB
node 6 free: 193303 MB
node 7 cpus: 63 64 67 68 69 73 74 77 78 79 143 144 147 148 149 153 154 157 158 159
node 7 size: 193524 MB
node 7 free: 193340 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 11 21 21 21 21 21 21
 1: 11 10 21 21 21 21 21 21
 2: 21 21 10 11 21 21 21 21
 3: 21 21 11 10 21 21 21 21
 4: 21 21 21 21 10 11 21 21
 5: 21 21 21 21 11 10 21 21
 6: 21 21 21 21 21 21 10 11
 7: 21 21 21 21 21 21 11 10
```

From /proc/meminfo

```
MemTotal: 1583894836 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 8049U-E1CR4T  
(X11QPH+, Intel Xeon Gold 6230)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 446

SPECrate®2017\_int\_peak = Not Run

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Platform Notes (Continued)

# Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

uname -a:

```
Linux linux 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS\_FW

run-level 3 Aug 19 18:08

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda7	xfs	135G	115G	21G	85%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.1 05/01/2019

Memory:

48x Hynix HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
      | 525.x264_r(base) 557.xz_r(base)
=====
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 8049U-E1CR4T  
(X11QPH+, Intel Xeon Gold 6230)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 446

SPECrate®2017\_int\_peak = Not Run

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Compiler Version Notes (Continued)

```
=====
C++      | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
          | 541.leela_r(base)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran | 548.exchange2_r(base)
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 8049U-E1CR4T  
(X11QPH+, Intel Xeon Gold 6230)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017\_int\_base = 446

SPECrate®2017\_int\_peak = Not Run

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-19 21:13:48-0400.

Report generated on 2019-09-17 16:05:17 by CPU2017 PDF formatter v6255.

Originally published on 2019-09-17.