



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 60.7

H3C UniServer R4900 G3 (Intel Xeon Gold 5122)

SPECrate®2017\_int\_peak = 62.5

CPU2017 License: 9066


Test Date: Sep-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

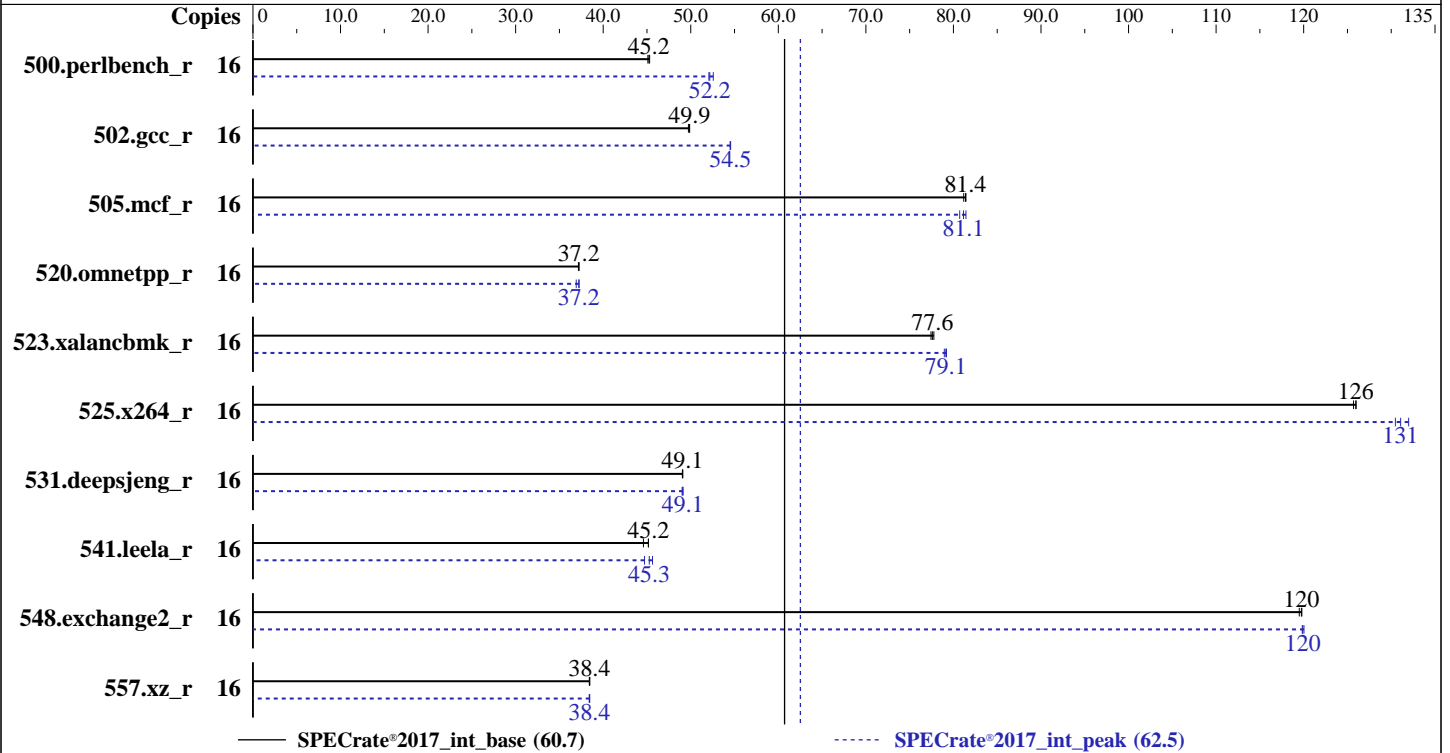

## Hardware

CPU Name: Intel Xeon Gold 5122  
 Max MHz: 3700  
 Nominal: 3600  
 Enabled: 8 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 16.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 1 TB 7200RPM SATA HDD  
 Other: None

## Software

OS: Red Hat Enterprise Linux Server release 7.5 (Maipo)  
 3.10.0-957.el7.x86\_64  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 2.00.31 released Jul-2019 BIOS  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 60.7

H3C UniServer R4900 G3 (Intel Xeon Gold 5122)

SPECrate®2017\_int\_peak = 62.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	565	45.1	<b>563</b>	<b>45.2</b>	562	45.3	16	<b>488</b>	<b>52.2</b>	489	52.1	484	52.6
502.gcc_r	16	454	49.9	456	49.7	<b>454</b>	<b>49.9</b>	16	416	54.5	<b>416</b>	<b>54.5</b>	415	54.6
505.mcf_r	16	319	81.2	<b>318</b>	<b>81.4</b>	318	81.4	16	<b>319</b>	<b>81.1</b>	320	80.7	318	81.4
520.omnetpp_r	16	564	37.2	565	37.2	<b>564</b>	<b>37.2</b>	16	569	36.9	564	37.2	<b>564</b>	<b>37.2</b>
523.xalancbmk_r	16	218	77.4	217	77.8	<b>218</b>	<b>77.6</b>	16	214	79.0	<b>214</b>	<b>79.1</b>	213	79.2
525.x264_r	16	<b>222</b>	<b>126</b>	223	126	222	126	16	215	130	<b>214</b>	<b>131</b>	212	132
531.deepsjeng_r	16	374	49.1	<b>374</b>	<b>49.1</b>	374	49.0	16	<b>374</b>	<b>49.1</b>	373	49.1	374	49.0
541.leela_r	16	<b>587</b>	<b>45.2</b>	594	44.6	587	45.2	16	592	44.7	581	45.6	<b>585</b>	<b>45.3</b>
548.exchange2_r	16	351	120	350	120	<b>350</b>	<b>120</b>	16	349	120	350	120	<b>350</b>	<b>120</b>
557.xz_r	16	450	38.4	<b>450</b>	<b>38.4</b>	449	38.5	16	450	38.4	449	38.5	<b>450</b>	<b>38.4</b>

SPECrate®2017\_int\_base = **60.7**

SPECrate®2017\_int\_peak = **62.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 60.7

H3C UniServer R4900 G3 (Intel Xeon Gold 5122)

SPECrate®2017\_int\_peak = 62.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

## General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Set SNC to Enabled  
Set IMC Interleaving to 1-way Interleave  
Set LLC Prefetch to Enabled  
Set XPT Prefetch to Enabled  
Set DCU IP Prefetcher to Disabled  
Sysinfo program /home/speccpu/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on localhost.localdomain Mon Sep 23 01:57:16 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5122 CPU @ 3.60GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 8
physical 0: cores 1 2 5 11
physical 1: cores 1 5 9 13
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 16
On-line CPU(s) list: 0-15
Thread(s) per core: 2
Core(s) per socket: 4
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5122 CPU @ 3.60GHz
Stepping: 4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 60.7

H3C UniServer R4900 G3 (Intel Xeon Gold 5122)

SPECrate®2017\_int\_peak = 62.5

CPU2017 License: 9066

Test Date: Sep-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

## Platform Notes (Continued)

```

CPU MHz: 3601.000
CPU max MHz: 3601.0000
CPU min MHz: 1200.0000
BogoMIPS: 7200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0-3,8-11
NUMA node1 CPU(s): 4-7,12-15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
intel_pt ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
spec_ctrl intel_stibp flush_lld

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 8 9 10 11
node 0 size: 195992 MB
node 0 free: 185106 MB
node 1 cpus: 4 5 6 7 12 13 14 15
node 1 size: 196608 MB
node 1 free: 191962 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

```

From /proc/meminfo
MemTotal: 395399648 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 60.7

H3C UniServer R4900 G3 (Intel Xeon Gold 5122)

SPECrate®2017\_int\_peak = 62.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

## Platform Notes (Continued)

NAME="Red Hat Enterprise Linux Server"

VERSION="7.5 (Maipo)"

ID="rhel"

ID\_LIKE="fedora"

VARIANT="Server"

VARIANT\_ID="server"

VERSION\_ID="7.5"

PRETTY\_NAME="OpenShift Enterprise"

redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.5:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-957.el7.x86\_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018  
x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Mitigation: PTI

CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)

run-level 3 Sep 23 01:53

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	876G	83G	794G	10%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.00.31 07/04/2019

Memory:

12x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666

12x NO DIMM NO DIMM

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 60.7

H3C UniServer R4900 G3 (Intel Xeon Gold 5122)

SPECrate®2017\_int\_peak = 62.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

## Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```

=====
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base, peak)
=====

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```

=====
C          | 502.gcc_r(peak)
=====

```

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```

=====
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base, peak)
=====

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```

=====
C++       | 523.xalanbmk_r(peak)
=====

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```

=====
C++       | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 60.7

H3C UniServer R4900 G3 (Intel Xeon Gold 5122)

SPECrate®2017\_int\_peak = 62.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

## Compiler Version Notes (Continued)

C++ | 523.xalancbmk\_r(peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 60.7

H3C UniServer R4900 G3 (Intel Xeon Gold 5122)

SPECrate®2017\_int\_peak = 62.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

## Base Portability Flags (Continued)

531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64 -std=c11

502.gcc\_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m64

523.xalancbmk\_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 60.7

H3C UniServer R4900 G3 (Intel Xeon Gold 5122)

SPECrate®2017\_int\_peak = 62.5

**CPU2017 License:** 9066

**Test Sponsor:** New H3C Technologies Co., Ltd.

**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Sep-2019

**Hardware Availability:** Jul-2017

**Software Availability:** May-2019

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

557.xz_r: Same as 505.mcf_r
```

C++ benchmarks:

```
520.omnetpp_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 60.7

H3C UniServer R4900 G3 (Intel Xeon Gold 5122)

SPECrate®2017\_int\_peak = 62.5

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

## Peak Optimization Flags (Continued)

```
523.xalancbmk_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-w1, -z, muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.00.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.00.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.00.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.00.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-23 01:57:15-0400.

Report generated on 2019-11-11 17:07:40 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-11.