



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## 3Score

(Test Sponsor: Telecommunications Technology Association)

### 3Score SR285K2

(2.30 GHz, Intel Xeon Gold 5118)

**SPECrate®2017\_int\_base = 115**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: A83


Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

**Test Date:** Oct-2019

**Hardware Availability:** Jul-2019

**Software Availability:** Apr-2019

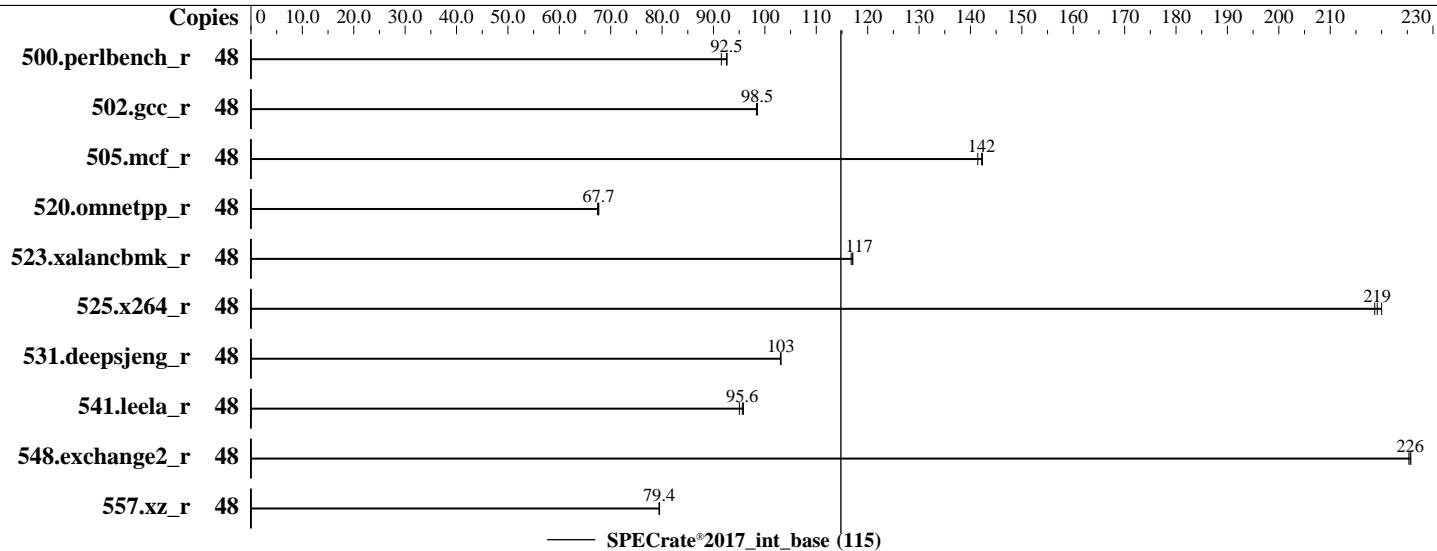

## Hardware

CPU Name: Intel Xeon Gold 5118  
 Max MHz: 3200  
 Nominal: 2300  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 2 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 16.5 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R,  
 running at 2400)  
 Storage: 2 x 2 TB HDD SATA, 7200 RPM, RAID-0  
 Other: None

## OS:

Red Hat Enterprise Linux Server release 7.6  
 (Maipo)

## Compiler:

Kernel 3.10.0-957.12.1.el7.x86\_64  
 C/C++: Version 18.0.1.163 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.1.163 of Intel Fortran  
 Compiler for Linux

## Parallel:

No

## Firmware:

Version KM-H620-10B1-SA2 released Jul-2018

## File System:

ext4

## System State:

Run level 3 (multi-user)

## Base Pointers:

64-bit

## Peak Pointers:

Not Applicable

## Other:

jemalloc: jemalloc memory allocator library  
 V5.0.1

## Power Management:

--

## Software



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## 3Score

(Test Sponsor: Telecommunications Technology Association)

### 3Score SR285K2

(2.30 GHz, Intel Xeon Gold 5118)

**SPECrate®2017\_int\_base = 115**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: A83

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Oct-2019

Hardware Availability: Jul-2019

Software Availability: Apr-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	825	92.6	<b>826</b>	<b>92.5</b>	835	91.5							
502.gcc_r	48	691	98.4	<b>690</b>	<b>98.5</b>	690	98.5							
505.mcf_r	48	<b>546</b>	<b>142</b>	545	142	548	141							
520.omnetpp_r	48	934	67.4	<b>931</b>	<b>67.7</b>	931	67.7							
523.xalancbmk_r	48	434	117	433	117	<b>433</b>	<b>117</b>							
525.x264_r	48	<b>384</b>	<b>219</b>	384	219	382	220							
531.deepsjeng_r	48	533	103	534	103	<b>534</b>	<b>103</b>							
541.leela_r	48	836	95.0	830	95.8	<b>831</b>	<b>95.6</b>							
548.exchange2_r	48	557	226	<b>558</b>	<b>226</b>	558	225							
557.xz_r	48	653	79.4	<b>653</b>	<b>79.4</b>	652	79.5							

**SPECrate®2017\_int\_base = 115**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/spec/cpu2017/ia32:/home/spec/cpu2017/intel64:/home/spec/cpu2017/j
e5.0.1-32:/home/spec/cpu2017/je5.0.1-64"
```

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/spec/cpu2017/ia32:/home/spec/cpu2017/intel64:
/home/spec/cpu2017/je5.0.1-32:/home/spec/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Xeon Gold 5118 CPU + 192GB RAM  
 memory using Redhat Enterprise Linux 7.6(Maipo)

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## 3Score

(Test Sponsor: Telecommunications Technology Association)

### 3Score SR285K2

(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017\_int\_base = 115

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: A83

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Oct-2019

Hardware Availability: Jul-2019

Software Availability: Apr-2019

## General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages disabled with:

```
echo never > /sys/kernel/mm/transparent_hugepage/enabled
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc - a general purpose malloc implementation

configured and built at default for 32bit(i686) and 64bit (x86\_64) targets with the RedHat Enterprise 7.4 and thesystem compiler gcc 4.8.5.

Sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

Hyper-Threading = Enabled

Sub NUMA Cluster = Enabled

AES-NI = Disabled

```
Sysinfo program /home/spec/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on spec3 Thu Oct 10 10:58:17 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz
  2 "physical id"s (chips)
  48 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
  cpu cores : 12
```

```
  siblings : 24
```

```
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

```
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## 3Score

(Test Sponsor: Telecommunications Technology Association)

### 3Score SR285K2

(2.30 GHz, Intel Xeon Gold 5118)

**SPECrate®2017\_int\_base = 115**

**SPECrate®2017\_int\_peak = Not Run**

**CPU2017 License:** A83

**Test Sponsor:** Telecommunications Technology Association

**Tested by:** Telecommunications Technology Association

**Test Date:** Oct-2019

**Hardware Availability:** Jul-2019

**Software Availability:** Apr-2019

## Platform Notes (Continued)

```

CPU(s): 48
On-line CPU(s) list: 0-47
Thread(s) per core: 2
Core(s) per socket: 12
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz
Stepping: 4
CPU MHz: 1000.073
CPU max MHz: 3200.0000
CPU min MHz: 1000.0000
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0-11,24-35
NUMA node1 CPU(s): 12-23,36-47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
intel_pt ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req pku ospke spec_ctrl intel_stibp flush_lld

```

```
/proc/cpuinfo cache data
cache size : 16896 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 24 25 26 27 28 29 30 31 32 33 34 35
node 0 size: 96933 MB
node 0 free: 63220 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 36 37 38 39 40 41 42 43 44 45 46 47
node 1 size: 98304 MB
node 1 free: 70568 MB
node distances:
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## 3Score

(Test Sponsor: Telecommunications Technology Association)

### 3Score SR285K2

(2.30 GHz, Intel Xeon Gold 5118)

**SPECrate®2017\_int\_base = 115**

**SPECrate®2017\_int\_peak = Not Run**

**CPU2017 License:** A83

**Test Sponsor:** Telecommunications Technology Association

**Tested by:** Telecommunications Technology Association

**Test Date:** Oct-2019

**Hardware Availability:** Jul-2019

**Software Availability:** Apr-2019

## Platform Notes (Continued)

```
node    0    1
 0:  10  21
 1:  21  10
```

```
From /proc/meminfo
MemTotal:      196681440 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 7.6 (Maipo)
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.6 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.6"
  PRETTY_NAME="Red Hat Enterprise Linux"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

```
uname -a:
Linux spec3 3.10.0-957.12.1.el7.x86_64 #1 SMP Wed Mar 20 11:34:37 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Mitigation: PTE Inversion; VMX: SMT vulnerable, L1D conditional cache flushes
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: IBRS (kernel)

run-level 3 2018-10-07 21:23

```
SPEC is set to: /home/spec/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  3.6T  146G  3.3T   5%  /
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## 3Score

(Test Sponsor: Telecommunications Technology Association)

### 3Score SR285K2

(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017\_int\_base = 115

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: A83

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Oct-2019

Hardware Availability: Jul-2019

Software Availability: Apr-2019

## Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. KM-H620-10B1-SA2 07/19/2018

Vendor: KTNF

Product: KM-H620

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x NO DIMM NO DIMM

12x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
	525.x264_r(base) 557.xz_r(base)

=====

icc (ICC) 18.0.1 20171018

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

C++	520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
	541.leela_r(base)

=====

icpc (ICC) 18.0.1 20171018

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

Fortran	548.exchange2_r(base)
---------	-----------------------

=====

ifort (IFORT) 18.0.1 20171018

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## 3Score

(Test Sponsor: Telecommunications Technology Association)

### 3Score SR285K2

(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017\_int\_base = 115

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: A83

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Oct-2019

Hardware Availability: Jul-2019

Software Availability: Apr-2019

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/jet5.0.1-64/lib -ljemalloc

C++ benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/jet5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/jet5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64-spec.html>

<http://www.spec.org/cpu2017/flags/3Score-Platform-Flags-Version-KM-H620-10B1-SA2.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## 3Score

(Test Sponsor: Telecommunications Technology Association)

### 3Score SR285K2

(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017\_int\_base = 115

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: A83

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Oct-2019

Hardware Availability: Jul-2019

Software Availability: Apr-2019

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64-spec.xml>

<http://www.spec.org/cpu2017/flags/3Score-Platform-Flags-Version-KM-H620-10B1-SA2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-09 21:58:16-0400.

Report generated on 2019-11-12 14:55:40 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-12.