



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

**SPECrate®2017\_int\_base = 2250**

**SPECrate®2017\_int\_peak = Not Run**

**CPU2017 License:** 2929


**Test Sponsor:** ScaleMP

**Tested by:** ScaleMP

**Test Date:** Dec-2019

**Hardware Availability:** Nov-2019

**Software Availability:** Nov-2019

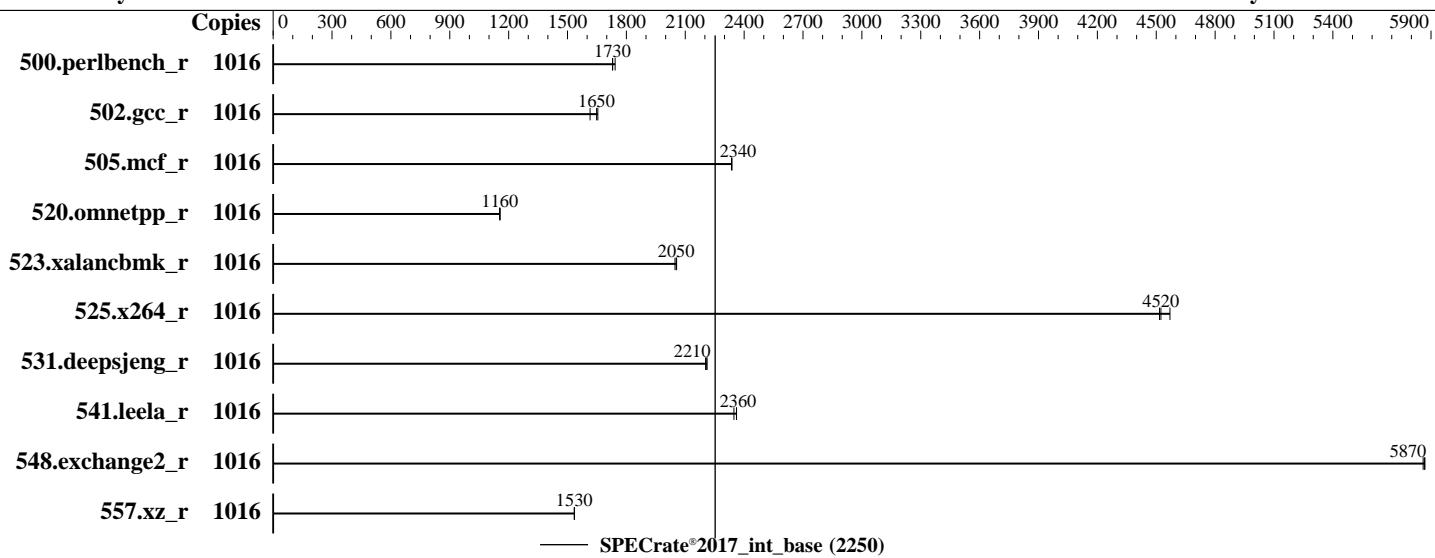

### Hardware

CPU Name: AMD EPYC 7702  
 Max MHz: 3350  
 Nominal: 2000  
 Enabled: 512 cores, 8 chips, 2 threads/core  
 Orderable: 1-8 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores  
 Other: None  
 Memory: 2 TB (64 x 32 GB 2Rx4 PC4-2667V-L)  
 Storage: 2 TB ramfs  
 Other: ScaleMP vSMP Foundation aggregates multiple servers into one shared-memory system.  
 Hardware Details:  
 vSMP System was aggregated using 4 units of Supermicro A+ Server 2123BT-HNC0R.  
 The servers were connected using Mellanox InfiniBand EDR fabric.

### Software

OS: SUSE Linux Enterprise Server 15 SP1, kernel version 4.12.14-197.21.1.vSMP.2-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: No  
 Firmware: ScaleMP vSMP Foundation version 9.5.195.18 released Dec-2019  
 File System: ramfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc: jemalloc memory allocator library v5.2.1  
 Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE  
Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

**SPECrate®2017\_int\_base = 2250**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 2929

Test Date: Dec-2019

Test Sponsor: ScaleMP

Hardware Availability: Nov-2019

Tested by: ScaleMP

Software Availability: Nov-2019

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	1016	928	1740	935	1730	<b>935</b>	<b>1730</b>									
502.gcc_r	1016	891	1610	<b>873</b>	<b>1650</b>	870	1650									
505.mcf_r	1016	703	2340	<b>703</b>	<b>2340</b>	702	2340									
520.omnetpp_r	1016	1155	1150	1153	1160	<b>1154</b>	<b>1160</b>									
523.xalancbmk_r	1016	522	2060	<b>522</b>	<b>2050</b>	524	2050									
525.x264_r	1016	389	4570	<b>393</b>	<b>4520</b>	394	4520									
531.deepsjeng_r	1016	528	2200	<b>527</b>	<b>2210</b>	527	2210									
541.leela_r	1016	<b>713</b>	<b>2360</b>	717	2350	713	2360									
548.exchange2_r	1016	454	5860	454	5870	<b>454</b>	<b>5870</b>									
557.xz_r	1016	715	1530	<b>715</b>	<b>1530</b>	715	1540									

**SPECrate®2017\_int\_base = 2250**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu  
Set numa\_stat=0 to improve page allocation performance  
Set stat\_interval=60 to reduce OS jitter

dirty\_ratio, swappiness, zone\_reclaim\_mode, drop\_caches, numa\_stat and stat\_interval were

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

CPU2017 License: 2929

Test Sponsor: ScaleMP

Tested by: ScaleMP

SPECrate®2017\_int\_base = 2250

SPECrate®2017\_int\_peak = Not Run

Test Date: Dec-2019

Hardware Availability: Nov-2019

Software Availability: Nov-2019

## Operating System Notes (Continued)

all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

Kernel Boot Parameter set with : nohz\_full=!0

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/dev/shm/amd_rate_aocc200_rome_C_lib/64;/dev/shm/amd_rate_aocc200_rome_
C_lib/32:/usr/local/lib:/usr/lib:/usr/lib64:/mnt/aocc-compiler-2.0.0/lib
    :/mnt/aocc-compiler-2.0.0/lib32:"
MALLOC_CONF = "retain:true,metadata_thp:always,thp:always,dirty_decay_ms:-1"
```

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH=/usr/local/lib:$LD_LIBRARY_PATH
LIBRARY_PATH=/usr/local/lib:$LIBRARY_PATH
MALLOC_TOP_PAD_=$((16777216))
MALLOC_TRIM_THRESHOLD_=$((16777216))
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with AMD64 AOCC v2.0.0 on this system with -Ofast -march=znver2  
jemalloc 5.2.1 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.1/jemalloc-5.2.1.tar.bz2>

## Platform Notes

BIOS settings:

```
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 180
Package Power Limit Control = Manual
Package Power Limit = 180
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

SPECrate®2017\_int\_base = 2250

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 2929

Test Sponsor: ScaleMP

Tested by: ScaleMP

Test Date: Dec-2019

Hardware Availability: Nov-2019

Software Availability: Nov-2019

## Platform Notes (Continued)

IOMMU = Enabled

APBDIS = 1

NUMA Nodes Per Socket = NPS4

Sysinfo program /dev/shm/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on 13d Sat Dec 21 17:34:55 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7702 64-Core Processor
  8 "physical id"s (chips)
  1024 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 64
  siblings : 128
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 4: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 5: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 6: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 7: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

Architecture: x86\_64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

SPECrate®2017\_int\_base = 2250

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 2929

Test Sponsor: ScaleMP

Tested by: ScaleMP

Test Date: Dec-2019

Hardware Availability: Nov-2019

Software Availability: Nov-2019

## Platform Notes (Continued)

CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
Address sizes: 47 bits physical, 48 bits virtual  
CPU(s): 1024  
On-line CPU(s) list: 0-1023  
Thread(s) per core: 2  
Core(s) per socket: 64  
Socket(s): 8  
NUMA node(s): 32  
Vendor ID: AuthenticAMD  
CPU family: 23  
Model: 49  
Model name: AMD EPYC 7702 64-Core Processor  
Stepping: 0  
CPU MHz: 2000.000  
CPU max MHz: 2000.0000  
CPU min MHz: 1800.0000  
BogoMIPS: 4000.12  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 512K  
L3 cache: 16384K  
NUMA node0 CPU(s): 0-15,512-527  
NUMA node1 CPU(s): 16-31,528-543  
NUMA node2 CPU(s): 32-47,544-559  
NUMA node3 CPU(s): 48-63,560-575  
NUMA node4 CPU(s): 64-79,576-591  
NUMA node5 CPU(s): 80-95,592-607  
NUMA node6 CPU(s): 96-111,608-623  
NUMA node7 CPU(s): 112-127,624-639  
NUMA node8 CPU(s): 128-143,640-655  
NUMA node9 CPU(s): 144-159,656-671  
NUMA node10 CPU(s): 160-175,672-687  
NUMA node11 CPU(s): 176-191,688-703  
NUMA node12 CPU(s): 192-207,704-719  
NUMA node13 CPU(s): 208-223,720-735  
NUMA node14 CPU(s): 224-239,736-751  
NUMA node15 CPU(s): 240-255,752-767  
NUMA node16 CPU(s): 256-271,768-783  
NUMA node17 CPU(s): 272-287,784-799  
NUMA node18 CPU(s): 288-303,800-815  
NUMA node19 CPU(s): 304-319,816-831  
NUMA node20 CPU(s): 320-335,832-847  
NUMA node21 CPU(s): 336-351,848-863  
NUMA node22 CPU(s): 352-367,864-879  
NUMA node23 CPU(s): 368-383,880-895  
NUMA node24 CPU(s): 384-399,896-911

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

SPECrate®2017\_int\_base = 2250

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 2929

Test Date: Dec-2019

Test Sponsor: ScaleMP

Hardware Availability: Nov-2019

Tested by: ScaleMP

Software Availability: Nov-2019

## Platform Notes (Continued)

NUMA node25 CPU(s): 400-415,912-927  
NUMA node26 CPU(s): 416-431,928-943  
NUMA node27 CPU(s): 432-447,944-959  
NUMA node28 CPU(s): 448-463,960-975  
NUMA node29 CPU(s): 464-479,976-991  
NUMA node30 CPU(s): 480-495,992-1007  
NUMA node31 CPU(s): 496-511,1008-1023  
Flags: fpu vme de pse tsc msr pae cx8 apic sep mttr pge mca cmov pat  
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpelgb rdtscp lm  
constant\_tsc rep\_good nopl nonstop\_tsc cpuid extd\_apicid aperfmpf perf\_pni pclmulqdq  
ssse3 fma cx16 sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf\_lm  
cmp\_legacy extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw skinit wdt  
tce topoext perfctr\_core perfctr\_nb bpext perfctr\_l2 mwaitx cpb cat\_13 cdp\_13  
hw\_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bml1 avx2 smep bml2 cqm rdt\_a rdseed  
adx smap clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc  
cqm\_mbm\_total cqm\_mbm\_local clzero irperf xsaveerptr arat npt lbrv svm\_lock  
nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold  
avic v\_vmsave\_vmload vgif umip rdpid overflow\_recov succor smca

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 32 nodes (0-31)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 512 513 514 515 516 517 518 519 520  
521 522 523 524 525 526 527  
node 0 size: 46868 MB  
node 0 free: 43690 MB  
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 528 529 530 531 532 533  
534 535 536 537 538 539 540 541 542 543  
node 1 size: 59461 MB  
node 1 free: 59281 MB  
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 544 545 546 547 548 549  
550 551 552 553 554 555 556 557 558 559  
node 2 size: 59461 MB  
node 2 free: 59307 MB  
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 560 561 562 563 564 565  
566 567 568 569 570 571 572 573 574 575  
node 3 size: 59461 MB  
node 3 free: 59315 MB  
node 4 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 576 577 578 579 580 581  
582 583 584 585 586 587 588 589 590 591  
node 4 size: 59461 MB  
node 4 free: 59293 MB  
node 5 cpus: 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 592 593 594 595 596 597  
598 599 600 601 602 603 604 605 606 607

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

SPECrate®2017\_int\_base = 2250

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 2929

Test Date: Dec-2019

Test Sponsor: ScaleMP

Hardware Availability: Nov-2019

Tested by: ScaleMP

Software Availability: Nov-2019

## Platform Notes (Continued)

```
node 5 size: 59461 MB
node 5 free: 59293 MB
node 6 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 608 609 610
611 612 613 614 615 616 617 618 619 620 621 622 623
node 6 size: 59461 MB
node 6 free: 59289 MB
node 7 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 624 625
626 627 628 629 630 631 632 633 634 635 636 637 638 639
node 7 size: 59461 MB
node 7 free: 59322 MB
node 8 cpus: 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 640 641
642 643 644 645 646 647 648 649 650 651 652 653 654 655
node 8 size: 47617 MB
node 8 free: 47559 MB
node 9 cpus: 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 656 657
658 659 660 661 662 663 664 665 666 667 668 669 670 671
node 9 size: 59461 MB
node 9 free: 59403 MB
node 10 cpus: 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 672 673
674 675 676 677 678 679 680 681 682 683 684 685 686 687
node 10 size: 59461 MB
node 10 free: 59403 MB
node 11 cpus: 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 688 689
690 691 692 693 694 695 696 697 698 699 700 701 702 703
node 11 size: 59461 MB
node 11 free: 59403 MB
node 12 cpus: 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 704 705
706 707 708 709 710 711 712 713 714 715 716 717 718 719
node 12 size: 59461 MB
node 12 free: 59403 MB
node 13 cpus: 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 720 721
722 723 724 725 726 727 728 729 730 731 732 733 734 735
node 13 size: 59461 MB
node 13 free: 59403 MB
node 14 cpus: 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 736 737
738 739 740 741 742 743 744 745 746 747 748 749 750 751
node 14 size: 59461 MB
node 14 free: 59403 MB
node 15 cpus: 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 752 753
754 755 756 757 758 759 760 761 762 763 764 765 766 767
node 15 size: 59461 MB
node 15 free: 59403 MB
node 16 cpus: 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 768 769
770 771 772 773 774 775 776 777 778 779 780 781 782 783
node 16 size: 47617 MB
node 16 free: 47559 MB
node 17 cpus: 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 784 785
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

SPECrate®2017\_int\_base = 2250

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 2929

Test Date: Dec-2019

Test Sponsor: ScaleMP

Hardware Availability: Nov-2019

Tested by: ScaleMP

Software Availability: Nov-2019

## Platform Notes (Continued)

```
786 787 788 789 790 791 792 793 794 795 796 797 798 799
node 17 size: 59531 MB
node 17 free: 59473 MB
node 18 cpus: 288 289 290 291 292 293 294 295 295 296 297 298 299 300 301 301 302 303 800 801
802 803 804 805 806 807 808 809 810 811 812 813 814 815
node 18 size: 59461 MB
node 18 free: 59403 MB
node 19 cpus: 304 305 306 307 308 309 310 311 312 313 314 315 315 316 316 317 318 319 816 817
818 819 820 821 822 823 824 825 826 827 828 829 830 831
node 19 size: 59461 MB
node 19 free: 59403 MB
node 20 cpus: 320 321 322 323 324 325 326 327 328 329 330 331 331 332 333 334 335 832 833
834 835 836 837 838 839 840 841 842 843 844 845 846 847
node 20 size: 59461 MB
node 20 free: 59403 MB
node 21 cpus: 336 337 338 339 340 341 342 343 344 345 345 346 347 347 348 349 350 350 351 848 849
850 851 852 853 854 855 856 857 858 859 860 861 862 863
node 21 size: 59461 MB
node 21 free: 59403 MB
node 22 cpus: 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 864 865
866 867 868 869 870 871 872 873 874 875 876 877 878 879
node 22 size: 59461 MB
node 22 free: 59403 MB
node 23 cpus: 368 369 370 371 372 373 374 375 376 377 378 379 380 380 381 382 383 880 881
882 883 884 885 886 887 888 889 890 891 892 893 894 895
node 23 size: 59461 MB
node 23 free: 59403 MB
node 24 cpus: 384 385 386 387 388 389 390 391 392 393 394 395 395 396 397 398 399 896 897
898 899 900 901 902 903 904 905 906 907 908 909 910 911
node 24 size: 47617 MB
node 24 free: 47539 MB
node 25 cpus: 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 912 913
914 915 916 917 918 919 920 921 922 923 924 925 926 927
node 25 size: 59461 MB
node 25 free: 59403 MB
node 26 cpus: 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 430 431 928 929
930 931 932 933 934 935 936 937 938 939 940 941 942 943
node 26 size: 59461 MB
node 26 free: 59403 MB
node 27 cpus: 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 944 945
946 947 948 949 950 951 952 953 954 955 956 957 958 959
node 27 size: 59461 MB
node 27 free: 59403 MB
node 28 cpus: 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 960 961
962 963 964 965 966 967 968 969 970 971 972 973 974 975
node 28 size: 59209 MB
node 28 free: 59151 MB
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

SPECrate®2017\_int\_base = 2250

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 2929

Test Date: Dec-2019

Test Sponsor: ScaleMP

Hardware Availability: Nov-2019

Tested by: ScaleMP

Software Availability: Nov-2019

## Platform Notes (Continued)

```
node 29 cpus: 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 976 977  
978 979 980 981 982 983 984 985 986 987 988 989 990 991  
node 29 size: 59209 MB  
node 29 free: 59151 MB  
node 30 cpus: 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 992 993  
994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007  
node 30 size: 59209 MB  
node 30 free: 59151 MB  
node 31 cpus: 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 1008 1009  
1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023  
node 31 size: 58948 MB  
node 31 free: 58890 MB  
node distances:  
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19  
20 21 22 23 24 25 26 27 28 29 30 31  
0: 10 12 12 12 32 32 32 32 254 254 254 254 254 254 254 254 254 254 254 254  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
1: 12 10 12 12 32 32 32 32 254 254 254 254 254 254 254 254 254 254 254 254  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
2: 12 12 10 12 32 32 32 32 254 254 254 254 254 254 254 254 254 254 254 254  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
3: 12 12 12 10 32 32 32 32 254 254 254 254 254 254 254 254 254 254 254 254  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
4: 32 32 32 32 10 12 12 12 254 254 254 254 254 254 254 254 254 254 254 254  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
5: 32 32 32 32 12 10 12 12 254 254 254 254 254 254 254 254 254 254 254 254  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
6: 32 32 32 32 12 12 10 12 254 254 254 254 254 254 254 254 254 254 254 254  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
7: 32 32 32 32 12 12 12 10 254 254 254 254 254 254 254 254 254 254 254 254  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
8: 254 254 254 254 254 254 254 254 254 254 10 12 12 12 12 32 32 32 32 32  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
9: 254 254 254 254 254 254 254 254 254 254 12 10 12 12 12 32 32 32 32 32  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
10: 254 254 254 254 254 254 254 254 254 254 12 12 10 12 32 32 32 32 32 32  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
11: 254 254 254 254 254 254 254 254 254 254 12 12 12 10 32 32 32 32 32 32  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
12: 254 254 254 254 254 254 254 254 254 254 32 32 32 32 32 10 12 12 12 254  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
13: 254 254 254 254 254 254 254 254 254 254 32 32 32 32 32 12 10 12 12 254  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
14: 254 254 254 254 254 254 254 254 254 254 32 32 32 32 32 12 12 10 12 254  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
15: 254 254 254 254 254 254 254 254 254 254 32 32 32 32 32 12 12 12 10 254  
254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254 254
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

SPECrate®2017\_int\_base = 2250

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 2929

Test Date: Dec-2019

Test Sponsor: ScaleMP

Hardware Availability: Nov-2019

Tested by: ScaleMP

Software Availability: Nov-2019

## Platform Notes (Continued)

16: 254  
10 12 12 12 32 32 32 32 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
17: 254  
12 10 12 12 32 32 32 32 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
18: 254  
12 12 10 12 32 32 32 32 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
19: 254  
12 12 12 10 32 32 32 32 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
20: 254  
32 32 32 32 10 12 12 12 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
21: 254  
32 32 32 32 12 10 12 12 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
22: 254  
32 32 32 32 12 12 10 12 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
23: 254  
32 32 32 32 12 12 12 10 254 254 254 254 254 254 254 254 254 254 254 254 254 254  
24: 254  
254 254 254 254 254 254 254 254 254 254 254 254 10 12 12 12 32 32 32 32  
25: 254  
254 254 254 254 254 254 254 254 254 254 254 12 10 12 12 32 32 32 32  
26: 254  
254 254 254 254 254 254 254 254 254 254 254 12 12 10 12 32 32 32 32  
27: 254  
254 254 254 254 254 254 254 254 254 254 254 12 12 12 10 32 32 32 32  
28: 254  
254 254 254 254 254 254 254 254 254 254 254 32 32 32 32 32 10 12 12 12  
29: 254  
254 254 254 254 254 254 254 254 254 254 254 32 32 32 32 32 12 10 12 12  
30: 254  
254 254 254 254 254 254 254 254 254 254 254 32 32 32 32 32 12 12 10 12  
31: 254  
254 254 254 254 254 254 254 254 254 254 32 32 32 32 32 12 12 10 10

From /proc/meminfo

MemTotal: 1897918224 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:  
NAME="SLES"  
VERSION="15-SP1"  
VERSION\_ID="15.1"  
PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP1"  
ID="sles"  
ID\_LIKE="suse"  
ANSI\_COLOR="0;32"

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

CPU2017 License: 2929

Test Sponsor: ScaleMP

Tested by: ScaleMP

SPECrate®2017\_int\_base = 2250

SPECrate®2017\_int\_peak = Not Run

Test Date: Dec-2019

Hardware Availability: Nov-2019

Software Availability: Nov-2019

## Platform Notes (Continued)

CPE\_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:

```
Linux 13d 4.12.14-197.21.1.vSMP.2-default #1 SMP Mon Oct 7 08:41:58 EDT 2019 (8ef2efd)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 Dec 21 17:28

SPEC is set to: /dev/shm

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
ramfs	ramfs	0	0	0	-	/dev/shm

From /sys/devices/virtual/dmi/id

BIOS:	ScaleMP 9.5.195.18 12/19/2019
Vendor:	ScaleMP
Product:	vSMP Foundation
Serial:	1122334

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron Technology 36ASF4G72PZ-2G6E1	32 kB 2 rank 2667
48x SK Hynix HMA84GR7AFR4N-VK	32 kB 2 rank 2667

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
	525.x264_r(base) 557.xz_r(base)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

CPU2017 License: 2929

Test Sponsor: ScaleMP

Tested by: ScaleMP

SPECrate®2017\_int\_base = 2250

SPECrate®2017\_int\_peak = Not Run

Test Date: Dec-2019

Hardware Availability: Nov-2019

Software Availability: Nov-2019

## Compiler Version Notes (Continued)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /mnt/aocc-compiler-2.0.0/bin

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
| 541.leela\_r(base)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /mnt/aocc-compiler-2.0.0/bin

=====  
Fortran | 548.exchange2\_r(base)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /mnt/aocc-compiler-2.0.0/bin

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

CPU2017 License: 2929

Test Sponsor: ScaleMP

Tested by: ScaleMP

SPECrate®2017\_int\_base = 2250

SPECrate®2017\_int\_peak = Not Run

Test Date: Dec-2019

Hardware Availability: Nov-2019

Software Availability: Nov-2019

## Base Portability Flags (Continued)

502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-fsto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ScaleMP

vSMP ServerONE

Supermicro A+ Server 2123BT-HNC0R (AMD EPYC 7702)

**CPU2017 License:** 2929

**Test Sponsor:** ScaleMP

**Tested by:** ScaleMP

**SPECrate®2017\_int\_base = 2250**

**SPECrate®2017\_int\_peak = Not Run**

**Test Date:** Dec-2019

**Hardware Availability:** Nov-2019

**Software Availability:** Nov-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.html>

<http://www.spec.org/cpu2017/flags/ScaleMP-Supermicro-Platform-Settings-V1.2-Rome-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.xml>

<http://www.spec.org/cpu2017/flags/ScaleMP-Supermicro-Platform-Settings-V1.2-Rome-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-12-21 20:34:54-0500.

Report generated on 2020-01-13 16:34:24 by CPU2017 PDF formatter v6255.

Originally published on 2020-01-13.