



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS4A0TR-28R

(3.10 GHz, Intel Xeon Gold 6254)

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb


SPECrate®2017_fp_base = 187

SPECrate®2017_fp_peak = 174

Test Date: Jan-2020

Hardware Availability: Sep-2019

Software Availability: Aug-2019

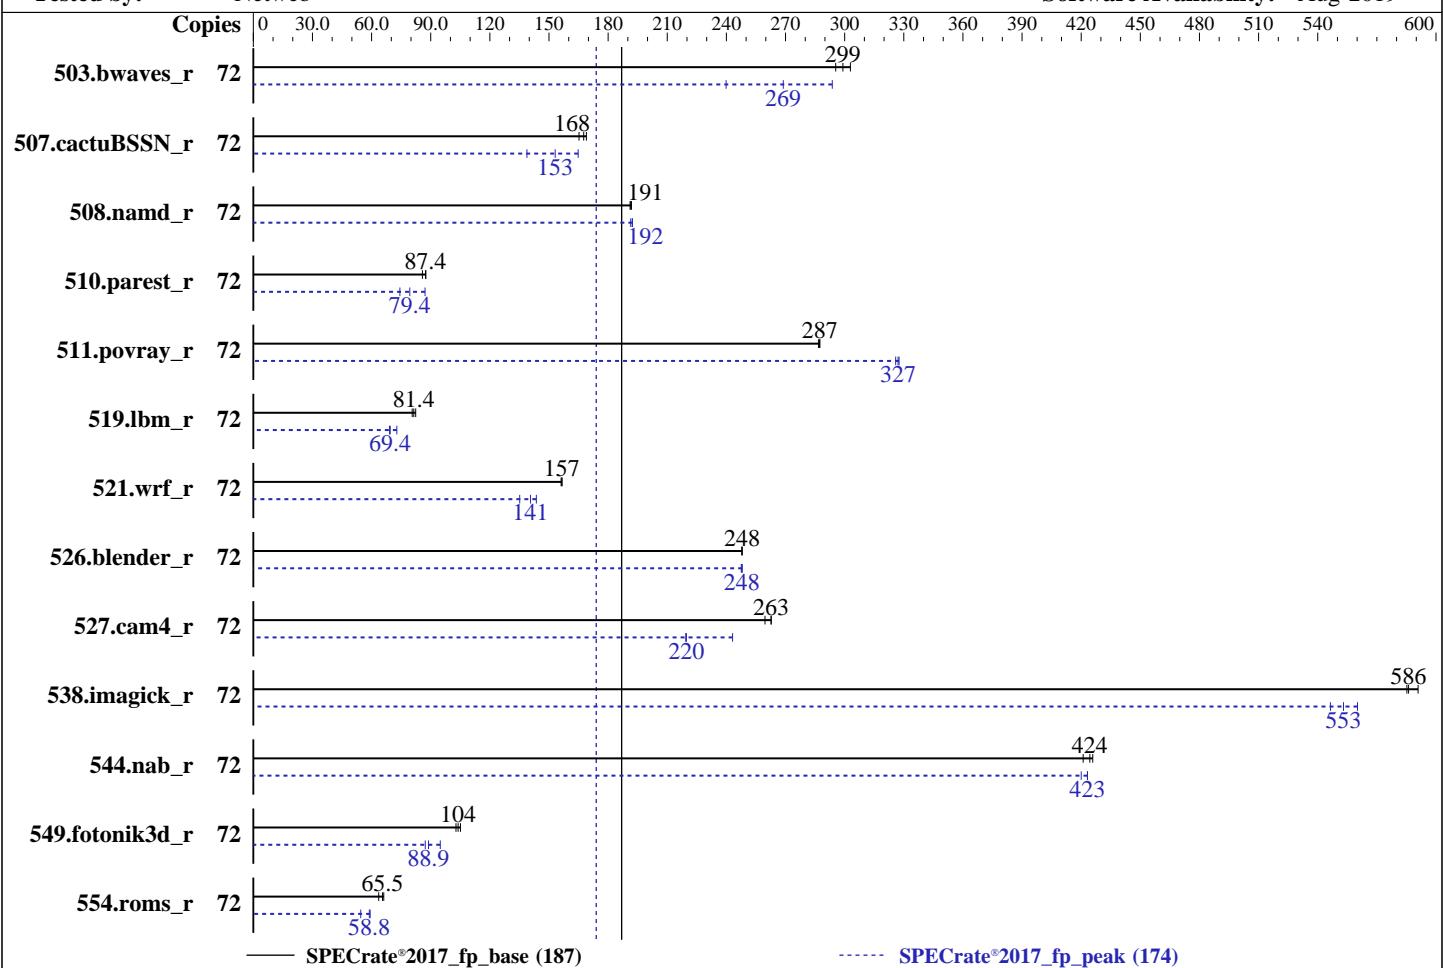

— Specrate®2017_fp_base (187)

— Specrate®2017_fp_peak (174)

Hardware

CPU Name: Intel Xeon Gold 6254
 Max MHz: 4000
 Nominal: 3100
 Enabled: 36 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 (chip)s
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 480 GB SSD
 Other: None

OS: CentOS Linux release 7.7.1908 (Core)
 Compiler: 3.10.0-1062.el7.x86_64
 C/C++: Version 19.0.4.243 of Intel C/C++
 Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.243 of Intel Fortran
 Compiler Build 20190416 for Linux
 Parallel: No
 Firmware: Version 5.14 released May-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: Default



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS4A0TR-28R

(3.10 GHz, Intel Xeon Gold 6254)

SPECrate®2017_fp_base = 187

SPECrate®2017_fp_peak = 174

CPU2017 License: 006042

Test Date: Jan-2020

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Sep-2019

Tested by: Netweb

Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	72	2384	303	2444	295	2414	299	72	2458	294	3010	240	2686	269
507.cactuBSSN_r	72	544	168	539	169	552	165	72	553	165	657	139	595	153
508.namd_r	72	357	192	358	191	357	191	72	357	191	356	192	356	192
510.parest_r	72	2196	85.8	2153	87.5	2155	87.4	72	2162	87.1	2533	74.4	2373	79.4
511.povray_r	72	585	287	586	287	585	287	72	513	328	514	327	516	326
519.lbm_r	72	942	80.6	932	81.4	921	82.4	72	1093	69.4	1098	69.1	1042	72.8
521.wrf_r	72	1030	157	1030	157	1033	156	72	1123	144	1193	135	1147	141
526.blender_r	72	442	248	442	248	442	248	72	443	248	442	248	442	248
527.cam4_r	72	485	260	479	263	479	263	72	573	220	574	219	518	243
538.imagick_r	72	303	591	306	585	306	586	72	320	560	324	553	328	546
544.nab_r	72	288	421	285	426	286	424	72	289	420	286	423	286	423
549.fotonik3d_r	72	2729	103	2670	105	2701	104	72	3217	87.2	3157	88.9	2958	94.8
554.roms_r	72	1746	65.5	1729	66.2	1798	63.6	72	2100	54.5	1945	58.8	1930	59.3

SPECrate®2017_fp_base = 187

SPECrate®2017_fp_peak = 174

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has learned that this result, which used an evaluation compiler, was submitted contrary to the compiler license terms.

Intel has granted a one-time waiver for this result.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS4A0TR-28R

(3.10 GHz, Intel Xeon Gold 6254)

SPECrate®2017_fp_base = 187

SPECrate®2017_fp_peak = 174

CPU2017 License: 006042

Test Date: Jan-2020

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Sep-2019

Tested by: Netweb

Software Availability: Aug-2019

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on NODE4 Mon Jan 20 10:32:05 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6254 CPU @ 3.10GHz

2 "physical id"s (chips)

72 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 36

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 72

On-line CPU(s) list: 0-71

Thread(s) per core: 2

Core(s) per socket: 18

Socket(s): 2

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS4A0TR-28R
(3.10 GHz, Intel Xeon Gold 6254)

SPECrate®2017_fp_base = 187

SPECrate®2017_fp_peak = 174

CPU2017 License: 006042

Test Date: Jan-2020

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Sep-2019

Tested by: Netweb

Software Availability: Aug-2019

Platform Notes (Continued)

```

NUMA node(s):          2
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 6254 CPU @ 3.10GHz
Stepping:              7
CPU MHz:              1199.963
CPU max MHz:          4000.0000
CPU min MHz:          1200.0000
BogoMIPS:              6200.00
Virtualization:       VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              25344K
NUMA node0 CPU(s):    0-17,36-53
NUMA node1 CPU(s):    18-35,54-71
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
                      aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
                      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_13 cdp_13 intel_ppin
                      intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
                      vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt_a
                      avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsavect
                      xsavect xgetbv1 cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln
                      pts pku ospke avx512_vnni md_clear spec_ctrl intel_stibp flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 36 37 38 39 40 41 42 43 44 45
          46 47 48 49 50 51 52 53
node 0 size: 261543 MB
node 0 free: 238151 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 54 55 56 57 58 59 60
          61 62 63 64 65 66 67 68 69 70 71
node 1 size: 262144 MB
node 1 free: 240099 MB
node distances:
node    0    1
  0: 10 21
  1: 21 10

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS4A0TR-28R
(3.10 GHz, Intel Xeon Gold 6254)

SPECrate®2017_fp_base = 187

SPECrate®2017_fp_peak = 174

CPU2017 License: 006042

Test Date: Jan-2020

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Sep-2019

Tested by: Netweb

Software Availability: Aug-2019

Platform Notes (Continued)

```
From /proc/meminfo
MemTotal:      527747556 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 7.7.1908 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.7 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="7 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="7"
  PRETTY_NAME="CentOS Linux 7 (Core)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.7.1908 (Core)
system-release: CentOS Linux release 7.7.1908 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

```
uname -a:
Linux NODE4 3.10.0-1062.el7.x86_64 #1 SMP Wed Aug 7 18:08:02 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full retpoline, IBPB

run-level 3 Jan 20 01:58

```
SPEC is set to: /home/cpu2017
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/centos-home xfs   392G  208G  185G  53% /home
```

```
From /sys/devices/virtual/dmi/id
BIOS:      American Megatrends Inc. 5.14 05/16/2019
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS4A0TR-28R

(3.10 GHz, Intel Xeon Gold 6254)

SPECrate®2017_fp_base = 187

SPECrate®2017_fp_peak = 174

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Jan-2020

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Platform Notes (Continued)

this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x NO DIMM NO DIMM

16x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

=====

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

=====

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

=====

=====

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS4A0TR-28R

(3.10 GHz, Intel Xeon Gold 6254)

SPECrate®2017_fp_base = 187

SPECrate®2017_fp_peak = 174

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Jan-2020

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS4A0TR-28R

(3.10 GHz, Intel Xeon Gold 6254)

SPECrate®2017_fp_base = 187

SPECrate®2017_fp_peak = 174

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Jan-2020

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS4A0TR-28R

(3.10 GHz, Intel Xeon Gold 6254)

SPECrate®2017_fp_base = 187

SPECrate®2017_fp_peak = 174

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Jan-2020

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS4A0TR-28R

(3.10 GHz, Intel Xeon Gold 6254)

SPECrate®2017_fp_base = 187

SPECrate®2017_fp_peak = 174

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Jan-2020

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

```
544.nab_r: Same as 538.imagick_r
```

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

```
549.fotonik3d_r: Same as 503.bwaves_r
```

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS4A0TR-28R

(3.10 GHz, Intel Xeon Gold 6254)

SPECrate®2017_fp_base = 187

SPECrate®2017_fp_peak = 174

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Jan-2020

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

526.blender_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-15.html>
<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-15.xml>
<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-20 10:32:04-0500.

Report generated on 2020-10-29 16:42:47 by CPU2017 PDF formatter v6255.

Originally published on 2020-02-18.