



# SPEC CPU®2017 Floating Point Rate Result


Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
 (Test Sponsor: Netweb Pte Ltd)  
**DIT400TR-48RL**  
 (2.70 GHz, Intel Xeon Platinum 8280L)

**SPECrate®2017\_fp\_base = 263**  
**SPECrate®2017\_fp\_peak = 265**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Feb-2020  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

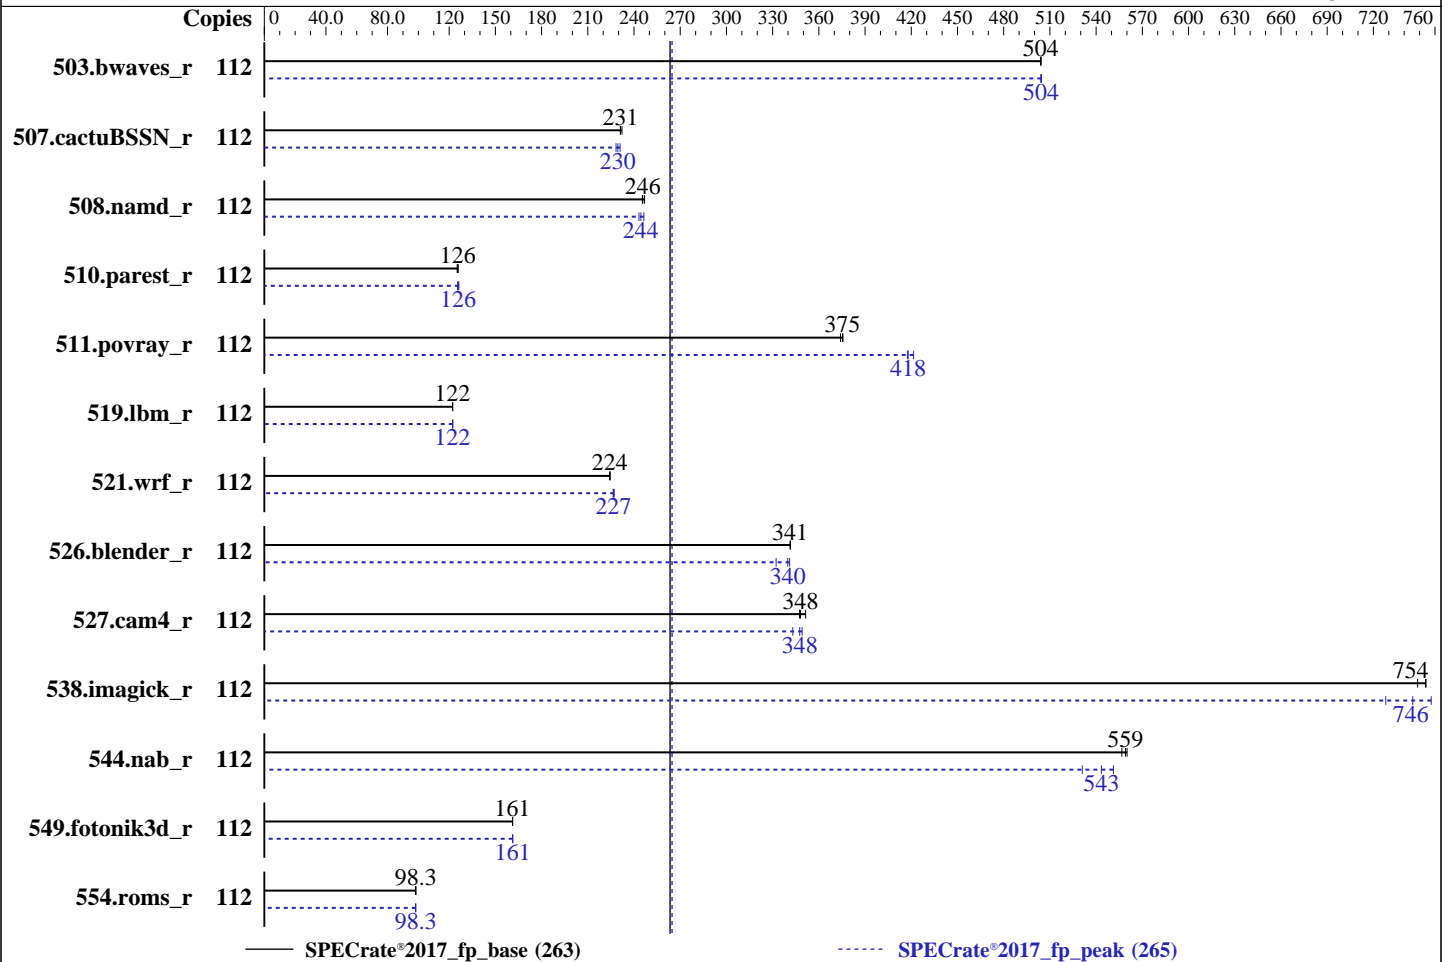

### Hardware

CPU Name: Intel Xeon Platinum 8280L  
 Max MHz: 4000  
 Nominal: 2700  
 Enabled: 56 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 (chip)s  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 480 GB SSD  
 Other: None

### Software

OS: CentOS Linux release 7.7.1908 (Core)  
 3.10.0-1062.el7.x86\_64  
 Compiler: C/C++: Version 19.0.4.243 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.243 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version V8.101 released Aug-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: Default



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

DIT400TR-48RL

(2.70 GHz, Intel Xeon Platinum 8280L)

SPECrate®2017\_fp\_base = 263

SPECrate®2017\_fp\_peak = 265

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Feb-2020

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	2228	504	<b><u>2228</u></b>	<b><u>504</u></b>	2228	504	112	2227	504	2227	504	<b><u>2227</u></b>	<b><u>504</u></b>
507.cactuBSSN_r	112	611	232	614	231	<b><u>613</u></b>	<b><u>231</u></b>	112	614	231	<b><u>618</u></b>	<b><u>230</u></b>	621	228
508.namd_r	112	431	247	434	245	<b><u>433</u></b>	<b><u>246</u></b>	112	432	246	<b><u>435</u></b>	<b><u>244</u></b>	437	243
510.parest_r	112	2328	126	<b><u>2332</u></b>	<b><u>126</u></b>	2340	125	112	2335	125	<b><u>2328</u></b>	<b><u>126</u></b>	2320	126
511.povray_r	112	699	374	696	376	<b><u>697</u></b>	<b><u>375</u></b>	112	620	422	<b><u>626</u></b>	<b><u>418</u></b>	626	417
519.lbm_r	112	966	122	966	122	<b><u>966</u></b>	<b><u>122</u></b>	112	<b><u>966</u></b>	<b><u>122</u></b>	966	122	965	122
521.wrf_r	112	<b><u>1118</u></b>	<b><u>224</u></b>	1119	224	1118	224	112	1105	227	1108	226	<b><u>1106</u></b>	<b><u>227</u></b>
526.blender_r	112	<b><u>500</u></b>	<b><u>341</u></b>	500	341	499	342	112	513	332	<b><u>502</u></b>	<b><u>340</u></b>	500	341
527.cam4_r	112	<b><u>563</u></b>	<b><u>348</u></b>	564	347	557	351	112	571	343	561	349	<b><u>564</u></b>	<b><u>348</u></b>
538.imagick_r	112	<b><u>369</u></b>	<b><u>754</u></b>	372	749	369	754	112	383	728	368	758	<b><u>374</u></b>	<b><u>746</u></b>
544.nab_r	112	<b><u>337</u></b>	<b><u>559</u></b>	339	557	337	560	112	355	531	<b><u>347</u></b>	<b><u>543</u></b>	342	551
549.fotonik3d_r	112	<b><u>2708</u></b>	<b><u>161</u></b>	2709	161	2707	161	112	2708	161	<b><u>2707</u></b>	<b><u>161</u></b>	2707	161
554.roms_r	112	1809	98.4	<b><u>1811</u></b>	<b><u>98.3</u></b>	1812	98.2	112	1813	98.2	1810	98.3	<b><u>1811</u></b>	<b><u>98.3</u></b>

SPECrate®2017\_fp\_base = 263

SPECrate®2017\_fp\_peak = 265

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has learned that this result, which used an evaluation compiler, was submitted contrary to the compiler license terms.

Intel has granted a one-time waiver for this result.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**DIT400TR-48RL**  
(2.70 GHz, Intel Xeon Platinum 8280L)

**SPECrate®2017\_fp\_base = 263**

**SPECrate®2017\_fp\_peak = 265**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Feb-2020  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

The system was tested with a pre-production version of the Intel Xeon Platinum 8280L, which had a nominal MHz of 2.6 GHz. Production chips have a nominal MHz of 2.7 GHz and therefore performance may be slightly faster than what was tested.

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on NODE4 Tue Feb 4 09:49:40 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8280L CPU @ 2.60GHz  
2 "physical id"s (chips)  
112 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 28  
siblings : 56  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**DIT400TR-48RL**

(2.70 GHz, Intel Xeon Platinum 8280L)

**SPECrate®2017\_fp\_base = 263**

**SPECrate®2017\_fp\_peak = 265**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Netweb

**Test Date:** Feb-2020

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## Platform Notes (Continued)

```

CPU(s): 112
On-line CPU(s) list: 0-111
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8280L CPU @ 2.60GHz
Stepping: 5
CPU MHz: 999.914
CPU max MHz: 3900.0000
CPU min MHz: 1000.0000
BogoMIPS: 5200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-27,56-83
NUMA node1 CPU(s): 28-55,84-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
intel_pt ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req pku ospke spec_ctrl intel_stibp flush_lld
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83
node 0 size: 195228 MB
node 0 free: 165308 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**DIT400TR-48RL**  
(2.70 GHz, Intel Xeon Platinum 8280L)

**SPECrate®2017\_fp\_base = 263**

**SPECrate®2017\_fp\_peak = 265**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Feb-2020  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

```
107 108 109 110 111
node 1 size: 196608 MB
node 1 free: 168726 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

```
From /proc/meminfo
MemTotal: 394852372 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 7.7.1908 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.7 (Source)
os-release:
NAME="CentOS Linux"
VERSION="7 (Core)"
ID="centos"
ID_LIKE="rhel fedora"
VERSION_ID="7"
PRETTY_NAME="CentOS Linux 7 (Core)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.7.1908 (Core)
system-release: CentOS Linux release 7.7.1908 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

```
uname -a:
Linux NODE4 3.10.0-1062.el7.x86_64 #1 SMP Wed Aug 7 18:08:02 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Vulnerable: Clear CPU buffers attempted, no
microcode; SMT vulnerable
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full retpoline, IBPB
```

```
run-level 3 Feb 4 06:00
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**DIT400TR-48RL**  
(2.70 GHz, Intel Xeon Platinum 8280L)

**SPECrate®2017\_fp\_base = 263**

**SPECrate®2017\_fp\_peak = 265**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Feb-2020  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/centos-home	xfs	392G	217G	176G	56%	/home

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. V8.101 08/02/2019  
Vendor: Tyrone Systems  
Product: TP12XH-L2I  
Serial: empty

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

```
=====
C++, C    | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**DIT400TR-48RL**  
(2.70 GHz, Intel Xeon Platinum 8280L)

**SPECrate®2017\_fp\_base = 263**

**SPECrate®2017\_fp\_peak = 265**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Feb-2020  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

DIT400TR-48RL

(2.70 GHz, Intel Xeon Platinum 8280L)

SPECrate®2017\_fp\_base = 263

SPECrate®2017\_fp\_peak = 265

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Netweb

**Test Date:** Feb-2020

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
```

```
507.cactuBSSN_r: -DSPEC_LP64
```

```
508.namd_r: -DSPEC_LP64
```

```
510.parest_r: -DSPEC_LP64
```

```
511.povray_r: -DSPEC_LP64
```

```
519.lbm_r: -DSPEC_LP64
```

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

```
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
538.imagick_r: -DSPEC_LP64
```

```
544.nab_r: -DSPEC_LP64
```

```
549.fotonik3d_r: -DSPEC_LP64
```

```
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

DIT400TR-48RL

(2.70 GHz, Intel Xeon Platinum 8280L)

SPECrate®2017\_fp\_base = 263

SPECrate®2017\_fp\_peak = 265

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Netweb

**Test Date:** Feb-2020

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**DIT400TR-48RL**  
(2.70 GHz, Intel Xeon Platinum 8280L)

**SPECrate®2017\_fp\_base = 263**

**SPECrate®2017\_fp\_peak = 265**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Feb-2020  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

538.imagick\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

508.namd\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

510.parest\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

DIT400TR-48RL

(2.70 GHz, Intel Xeon Platinum 8280L)

SPECrate®2017\_fp\_base = 263

SPECrate®2017\_fp\_peak = 265

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Netweb

**Test Date:** Feb-2020

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/TyroneIT-Platform-Settings-V1-CLX-revA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-15.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/TyroneIT-Platform-Settings-V1-CLX-revA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-15.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-04 09:49:40-0500.

Report generated on 2020-10-29 21:05:39 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-17.