



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

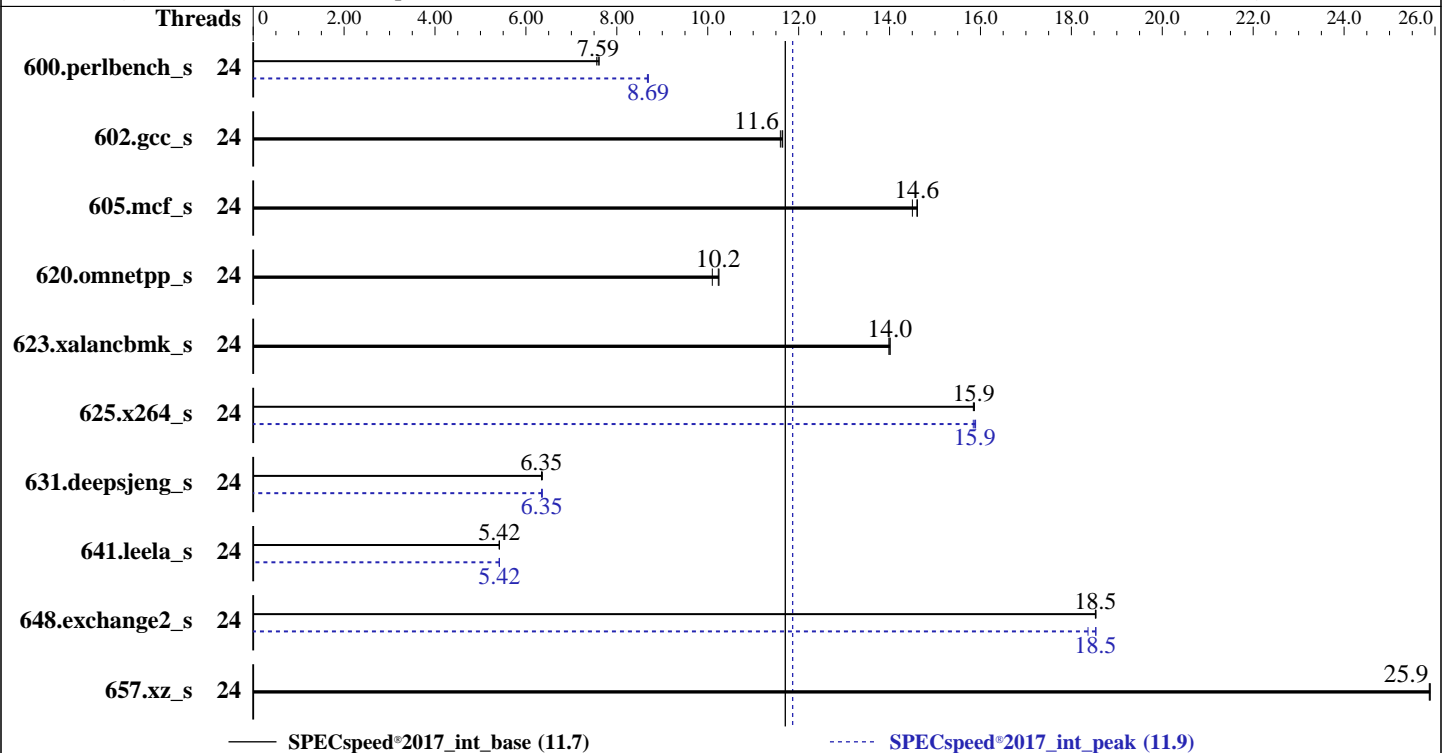

Hardware

CPU Name: Intel Xeon Gold 6256
 Max MHz: 4500
 Nominal: 3600
 Enabled: 24 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 33 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 1 TB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1
 Kernel 4.12.14-195-default
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
 Parallel: Yes
 Firmware: Version 6102 released Dec-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Jun-2019

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	235	7.56	233	7.61	234	7.59	24	204	8.69	205	8.67	204	8.69
602.gcc_s	24	342	11.6	342	11.6	343	11.6	24	342	11.6	342	11.6	343	11.6
605.mcf_s	24	326	14.5	323	14.6	323	14.6	24	326	14.5	323	14.6	323	14.6
620.omnetpp_s	24	159	10.2	159	10.2	161	10.1	24	159	10.2	159	10.2	161	10.1
623.xalancbmk_s	24	101	14.0	101	14.0	101	14.0	24	101	14.0	101	14.0	101	14.0
625.x264_s	24	111	15.9	111	15.9	111	15.8	24	111	15.8	111	15.9	111	15.9
631.deepsjeng_s	24	226	6.34	225	6.36	226	6.35	24	226	6.35	226	6.35	225	6.36
641.leela_s	24	315	5.42	315	5.42	315	5.41	24	315	5.42	315	5.41	315	5.42
648.exchange2_s	24	159	18.5	159	18.5	159	18.5	24	159	18.5	160	18.4	159	18.5
657.xz_s	24	239	25.9	239	25.9	239	25.9	24	239	25.9	239	25.9	239	25.9

SPECspeed®2017_int_base = **11.7**

SPECspeed®2017_int_peak = **11.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/19u4/lib/intel64:/19u4/je5.0.1-64"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

The jemalloc library was

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

General Notes (Continued)

configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
VT-d = Disabled
Patrol Scrub = Disabled
HyperThreading = Disabled
ENERGY_PERF_BIAS_CFG mode = performance
CSM Support = Disabled
Engine Boost = Level3(Max)
Enforce POR = Disable
Memory Frequency = 2933
LLC dead line allc = Disabled
SR-IOV Support = Disabled

Sysinfo program /19u4/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-628j Thu Apr 16 21:00:41 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6256 CPU @ 3.60GHz
2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings : 12
physical 0: cores 0 3 10 12 13 16 17 21 25 26 27 29
physical 1: cores 2 4 5 9 11 13 16 18 21 24 26 28

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 46 bits physical, 48 bits virtual
CPU(s): 24

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Platform Notes (Continued)

```

On-line CPU(s) list: 0-23
Thread(s) per core: 1
Core(s) per socket: 12
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6256 CPU @ 3.60GHz
Stepping: 7
CPU MHz: 3600.000
CPU max MHz: 4500.0000
CPU min MHz: 1200.0000
BogoMIPS: 7200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 33792K
NUMA node0 CPU(s): 0-11
NUMA node1 CPU(s): 12-23
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 33792 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 385586 MB
node 0 free: 385029 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23
node 1 size: 387068 MB
node 1 free: 386712 MB
node distances:

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Platform Notes (Continued)

```
node    0    1
0:     10   21
1:     21   10
```

From /proc/meminfo

```
MemTotal:      791199468 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-628j 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
```

run-level 3 Apr 16 20:59

SPEC is set to: /19u4

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   932G   19G  913G   3% /
```

From /sys/devices/virtual/dmi/id

```
BIOS:      American Megatrends Inc. 6102 12/19/2019
Vendor:    ASUSTeK COMPUTER INC.
Product:   Z11PG-D24 Series
Product Family: Server
Serial:    System Serial Number
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
          | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====
```

```
=====  
C++       | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)  
          | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====
```

```
=====  
Fortran   | 648.exchange2_s(base, peak)  
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====
```

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/jc5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

602.gcc_s: basepeak = yes

605.mcf_s: basepeak = yes

```
625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

```
631.deepsjeng_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System
(3.60 GHz, Intel Xeon Gold 6256)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

Peak Optimization Flags (Continued)

641.leela_s: Same as 631.deepsjeng_s

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revF.html>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revF.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-16 09:00:40-0400.

Report generated on 2021-01-04 18:00:42 by CPU2017 PDF formatter v6255.

Originally published on 2020-05-12.