



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 223

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_int\_peak = 231

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jan-2020

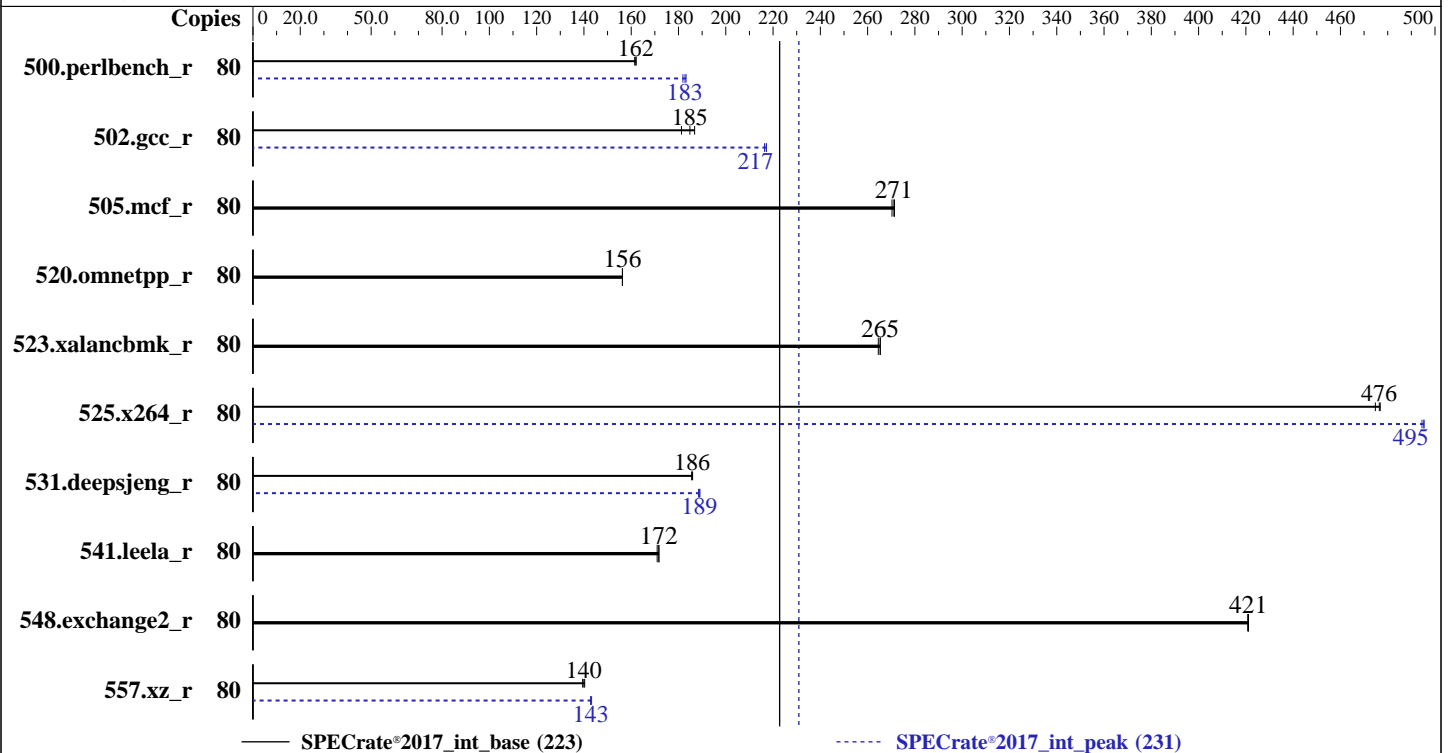

### Hardware

CPU Name: Intel Xeon Gold 5218R  
 Max MHz: 4000  
 Nominal: 2100  
 Enabled: 40 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 27.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC4-2933V-R, running at 2666)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: CentOS Linux release 8.1.1911 kernel 4.18.0-147.el8.x86\_64  
 Compiler: C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 2.7.3 released Mar-2020  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 223

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_int\_peak = 231

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2020  
Hardware Availability: Feb-2020  
Software Availability: Jan-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	789	161	<b>787</b>	<b>162</b>	786	162	80	<b>697</b>	<b>183</b>	700	182	695	183
502.gcc_r	80	606	187	625	181	<b>613</b>	<b>185</b>	80	<b>522</b>	<b>217</b>	522	217	524	216
505.mcf_r	80	<b>477</b>	<b>271</b>	476	271	478	270	80	<b>477</b>	<b>271</b>	476	271	478	270
520.omnetpp_r	80	672	156	<b>672</b>	<b>156</b>	672	156	80	672	156	<b>672</b>	<b>156</b>	672	156
523.xalancbmk_r	80	<b>318</b>	<b>265</b>	319	265	318	265	80	<b>318</b>	<b>265</b>	319	265	318	265
525.x264_r	80	294	477	295	475	<b>294</b>	<b>476</b>	80	283	494	283	495	<b>283</b>	<b>495</b>
531.deepsjeng_r	80	494	186	<b>494</b>	<b>186</b>	493	186	80	<b>486</b>	<b>189</b>	487	188	485	189
541.leela_r	80	<b>772</b>	<b>172</b>	775	171	771	172	80	<b>772</b>	<b>172</b>	775	171	771	172
548.exchange2_r	80	498	421	<b>498</b>	<b>421</b>	498	421	80	498	421	<b>498</b>	<b>421</b>	498	421
557.xz_r	80	<b>617</b>	<b>140</b>	616	140	620	139	80	605	143	<b>604</b>	<b>143</b>	603	143

SPECrate®2017\_int\_base = 223

SPECrate®2017\_int\_peak = 231

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/root/cpu2017/lib/intel64:/root/cpu2017/lib/ia32:/root/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 223

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_int\_peak = 231

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jan-2020

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

ClE disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub set to standard

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost.localdomain Thu Apr 9 21:06:07 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz
```

```
2 "physical id"s (chips)
```

```
80 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 20
```

```
siblings : 40
```

```
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

```
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 223

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_int\_peak = 231

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2020  
Hardware Availability: Feb-2020  
Software Availability: Jan-2020

## Platform Notes (Continued)

```

From lscpu:
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               80
On-line CPU(s) list:  0-79
Thread(s) per core:   2
Core(s) per socket:   20
Socket(s):            2
NUMA node(s):        4
Vendor ID:            GenuineIntel
CPU family:           6
Model:               85
Model name:           Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz
Stepping:             7
CPU MHz:              924.318
CPU max MHz:          4000.0000
CPU min MHz:          800.0000
BogoMIPS:             4200.00
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             28160K
NUMA node0 CPU(s):   0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76
NUMA node1 CPU(s):   1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77
NUMA node2 CPU(s):   2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78
NUMA node3 CPU(s):   3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld
arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 223

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_int\_peak = 231

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jan-2020

## Platform Notes (Continued)

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76
node 0 size: 95305 MB
node 0 free: 95017 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77
node 1 size: 96738 MB
node 1 free: 82209 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78
node 2 size: 96763 MB
node 2 free: 96450 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79
node 3 size: 96763 MB
node 3 free: 96386 MB
node distances:
node  0  1  2  3
  0:  10  21  11  21
  1:  21  10  21  11
  2:  11  21  10  21
  3:  21  11  21  10

```

From /proc/meminfo

```

MemTotal:      394824712 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

centos-release: CentOS Linux release 8.1.1911 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.1 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="8 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8 (Core)"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.1.1911 (Core)
system-release: CentOS Linux release 8.1.1911 (Core)
system-release-cpe: cpe:/o:centos:centos:8

```

uname -a:

```

Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Wed Dec 4 21:51:45 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 223

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_int\_peak = 231

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jan-2020

## Platform Notes (Continued)

CVE-2018-3620 (L1 Terminal Fault): Not affected  
 Microarchitectural Data Sampling: Not affected  
 CVE-2017-5754 (Meltdown): Not affected  
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp  
 CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization  
 CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Apr 9 17:41 last=5

SPEC is set to: /root/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	439G	16G	401G	4%	/

From /sys/devices/virtual/dmi/id

BIOS: Dell Inc. 2.7.3 03/25/2020  
 Vendor: Dell Inc.  
 Product: PowerEdge C6420  
 Product Family: PowerEdge  
 Serial: 1234567

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933  
 1x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933  
 3x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933  
 4x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
=====
```

```
Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 223

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_int\_peak = 231

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jan-2020

## Compiler Version Notes (Continued)

```
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base)
```

-----

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5  
 NextGen Technology Build 20190729  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----

```
=====  
C      | 500.perlbench_r(peak) 557.xz_r(peak)
```

-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.5.281 Build 20190815  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----

```
=====  
C      | 502.gcc_r(peak)
```

-----

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen  
 Technology Build 20190729  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base)
```

-----

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5  
 NextGen Technology Build 20190729  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----

```
=====  
C      | 500.perlbench_r(peak) 557.xz_r(peak)
```

-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.5.281 Build 20190815  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----

```
=====  
C      | 502.gcc_r(peak)
```

-----

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen  
 Technology Build 20190729  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 223

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_int\_peak = 231

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jan-2020

## Compiler Version Notes (Continued)

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base)
-----
```

```
Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C          | 500.perlbench_r(peak) 557.xz_r(peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base, peak)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran   | 548.exchange2_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort





# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate<sup>®</sup>2017\_int\_base = 223

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate<sup>®</sup>2017\_int\_peak = 231

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jan-2020

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -flto
-mfpmath=sse -funroll-loops -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -flto -mfpmath=sse
-funroll-loops -qnextgen -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 223

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_int\_peak = 231

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jan-2020

## Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-32/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -flto -O3
-ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

```

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 223

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_int\_peak = 231

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Jan-2020

## Peak Optimization Flags (Continued)

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

```
531.deepsjeng_r: -m64 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.html](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-09 21:06:07-0400.

Report generated on 2020-05-12 14:54:58 by CPU2017 PDF formatter v6255.

Originally published on 2020-05-12.