



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 212

PowerEdge R640 (Intel Xeon Gold 6256, 3.60 GHz)

SPECrate®2017\_int\_peak = 220

CPU2017 License: 55


Test Date: Jun-2020

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

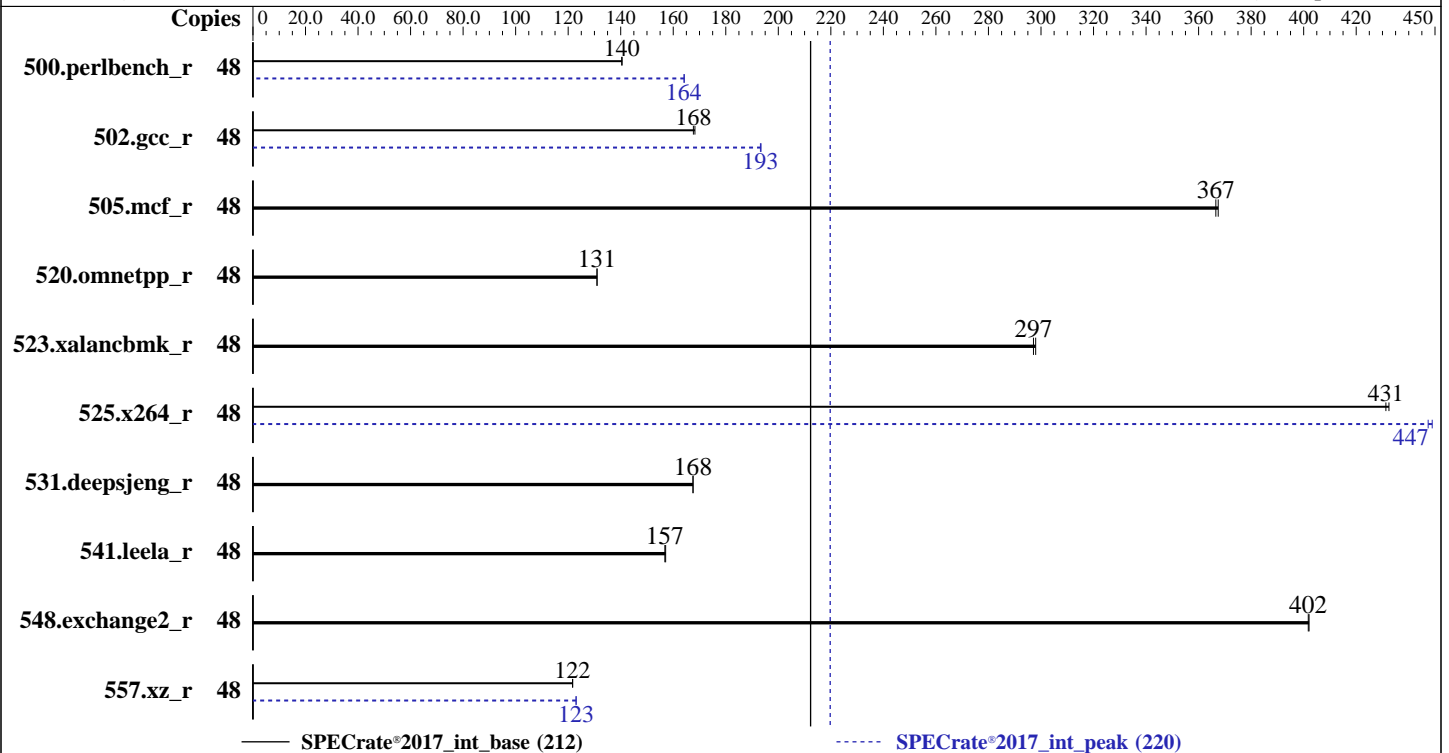

### Hardware

CPU Name: Intel Xeon Gold 6256  
 Max MHz: 4500  
 Nominal: 3600  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 33 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933V-R, running at 2933)  
 Storage: 1 x 1.92 TB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.1  
 kernel 4.18.0-147.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 2.7.7 released May-2020  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 212

PowerEdge R640 (Intel Xeon Gold 6256, 3.60 GHz)

SPECrate®2017\_int\_peak = 220

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2020  
Hardware Availability: Jul-2020  
Software Availability: Apr-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	544	141	<b>544</b>	<b>140</b>			48	465	164	<b>466</b>	<b>164</b>		
502.gcc_r	48	<b>405</b>	<b>168</b>	404	168			48	351	193	<b>352</b>	<b>193</b>		
505.mcf_r	48	<b>212</b>	<b>367</b>	211	367			48	<b>212</b>	<b>367</b>	211	367		
520.omnetpp_r	48	<b>481</b>	<b>131</b>	481	131			48	<b>481</b>	<b>131</b>	481	131		
523.xalancbmk_r	48	170	298	<b>171</b>	<b>297</b>			48	170	298	<b>171</b>	<b>297</b>		
525.x264_r	48	194	432	<b>195</b>	<b>431</b>			48	<b>188</b>	<b>447</b>	187	449		
531.deepsjeng_r	48	<b>328</b>	<b>168</b>	328	168			48	<b>328</b>	<b>168</b>	328	168		
541.leela_r	48	506	157	<b>507</b>	<b>157</b>			48	506	157	<b>507</b>	<b>157</b>		
548.exchange2_r	48	313	402	<b>313</b>	<b>402</b>			48	313	402	<b>313</b>	<b>402</b>		
557.xz_r	48	426	122	<b>426</b>	<b>122</b>			48	<b>421</b>	<b>123</b>	421	123		

SPECrate®2017\_int\_base = 212

SPECrate®2017\_int\_peak = 220

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/mnt/ramdisk/cpu2017-ic19.1ul/lib/intel64:/mnt/ramdisk/cpu2017-ic19.1ul/lib/ia32:/mnt/ramdisk/cpu2017-ic19.1ul/je5.0.1-32"  
MALLOCONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 212

PowerEdge R640 (Intel Xeon Gold 6256, 3.60 GHz)

SPECrate®2017\_int\_peak = 220

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
Benchmark run from a 225 GB ramdisk created with the cmd; "mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk"  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:  
Sub NUMA Cluster enabled  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub set to standard  
Logical Processor enabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
UPI Prefetch enabled  
LLC Prefetch disabled  
Dead Line LLC Alloc enabled  
Directory AtoS disabled  
  
Sysinfo program /mnt/ramdisk/cpu2017-ic19.1u1/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on rhel-8-1-sut Wed Jun 3 11:59:29 2020  
  
SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 212

PowerEdge R640 (Intel Xeon Gold 6256, 3.60 GHz)

SPECrate®2017\_int\_peak = 220

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Platform Notes (Continued)

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 6256 CPU @ 3.60GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 12
siblings       : 24
physical 0:    cores 0 4 10 13 16 17 19 21 25 26 28 29
physical 1:    cores 0 10 12 13 16 17 19 21 25 26 27 28

```

From lscpu:

```

Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          48
On-line CPU(s) list: 0-47
Thread(s) per core: 2
Core(s) per socket: 12
Socket(s):       2
NUMA node(s):   4
Vendor ID:       GenuineIntel
CPU family:      6
Model:           85
Model name:      Intel(R) Xeon(R) Gold 6256 CPU @ 3.60GHz
Stepping:        7
CPU MHz:         4002.932
CPU max MHz:     4500.0000
CPU min MHz:     1200.0000
BogoMIPS:        7200.00
Virtualization:  VT-x
L1d cache:      32K
L1i cache:      32K
L2 cache:       1024K
L3 cache:       33792K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47
Flags:           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 212

PowerEdge R640 (Intel Xeon Gold 6256, 3.60 GHz)

SPECrate®2017\_int\_peak = 220

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Platform Notes (Continued)

flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm  
cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd  
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total  
cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni md\_clear flush\_l1d  
arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 33792 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44
node 0 size: 95306 MB
node 0 free: 86251 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 1 size: 96765 MB
node 1 free: 96549 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46
node 2 size: 96739 MB
node 2 free: 96303 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 96764 MB
node 3 free: 96561 MB
node distances:
node  0  1  2  3
  0:  10  21  11  21
  1:  21  10  21  11
  2:  11  21  10  21
  3:  21  11  21  10
```

```
From /proc/meminfo
MemTotal:          394831136 kB
HugePages_Total:      0
Hugepagesize:       2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 212

PowerEdge R640 (Intel Xeon Gold 6256, 3.60 GHz)

SPECrate®2017\_int\_peak = 220

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

```
uname -a:
Linux rhel-8-1-sut 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass):  Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: usercopy/swaps barriers and __user
                                              pointer sanitization
CVE-2017-5715 (Spectre variant 2):         Mitigation: Enhanced IBRS, IBPB: conditional,
                                              RSB filling
```

```
run-level 3 Jun 3 11:55 last=5
```

```
SPEC is set to: /mnt/ramdisk/cpu2017-ic19.1ul
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 150G  4.2G 146G   3% /mnt/ramdisk
```

```
From /sys/devices/virtual/dmi/id
BIOS:      Dell Inc. 2.7.7 05/04/2020
Vendor:    Dell Inc.
Product:   PowerEdge R640
Product Family: PowerEdge
Serial:    FPFXCH2
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
10x 002C069D002C 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933
4x 00AD00B300AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933
8x 00AD00B300AD HMA82GR7CJR8N-XN 16 GB 2 rank 3200
2x 00AD063200AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 212

PowerEdge R640 (Intel Xeon Gold 6256, 3.60 GHz)

SPECrate®2017\_int\_peak = 220

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 212

PowerEdge R640 (Intel Xeon Gold 6256, 3.60 GHz)

SPECrate®2017\_int\_peak = 220

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Fortran | 548.exchange2\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 212

PowerEdge R640 (Intel Xeon Gold 6256, 3.60 GHz)

SPECrate®2017\_int\_peak = 220

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 212

PowerEdge R640 (Intel Xeon Gold 6256, 3.60 GHz)

SPECrate®2017\_int\_peak = 220

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 212

PowerEdge R640 (Intel Xeon Gold 6256, 3.60 GHz)

SPECrate®2017\_int\_peak = 220

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2020

Hardware Availability: Jul-2020

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

502.gcc\_r: -m32

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32_lin  
-std=gnu89  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto  
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc
```

505.mcf\_r: basepeak = yes

525.x264\_r: -m64 -qnextgen -std=c11

```
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math  
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

557.xz\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 212

PowerEdge R640 (Intel Xeon Gold 6256, 3.60 GHz)

SPECrate®2017\_int\_peak = 220

**CPU2017 License:** 55

**Test Date:** Jun-2020

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Jul-2020

**Tested by:** Dell Inc.

**Software Availability:** Apr-2020

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul1-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.lul1-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-03 12:59:29-0400.

Report generated on 2020-06-23 18:06:55 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-23.