SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.30 GHz, AMD EPYC 7352

SPECrate®2017_int_base = 329

SPECrate®2017_int_peak = 348

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

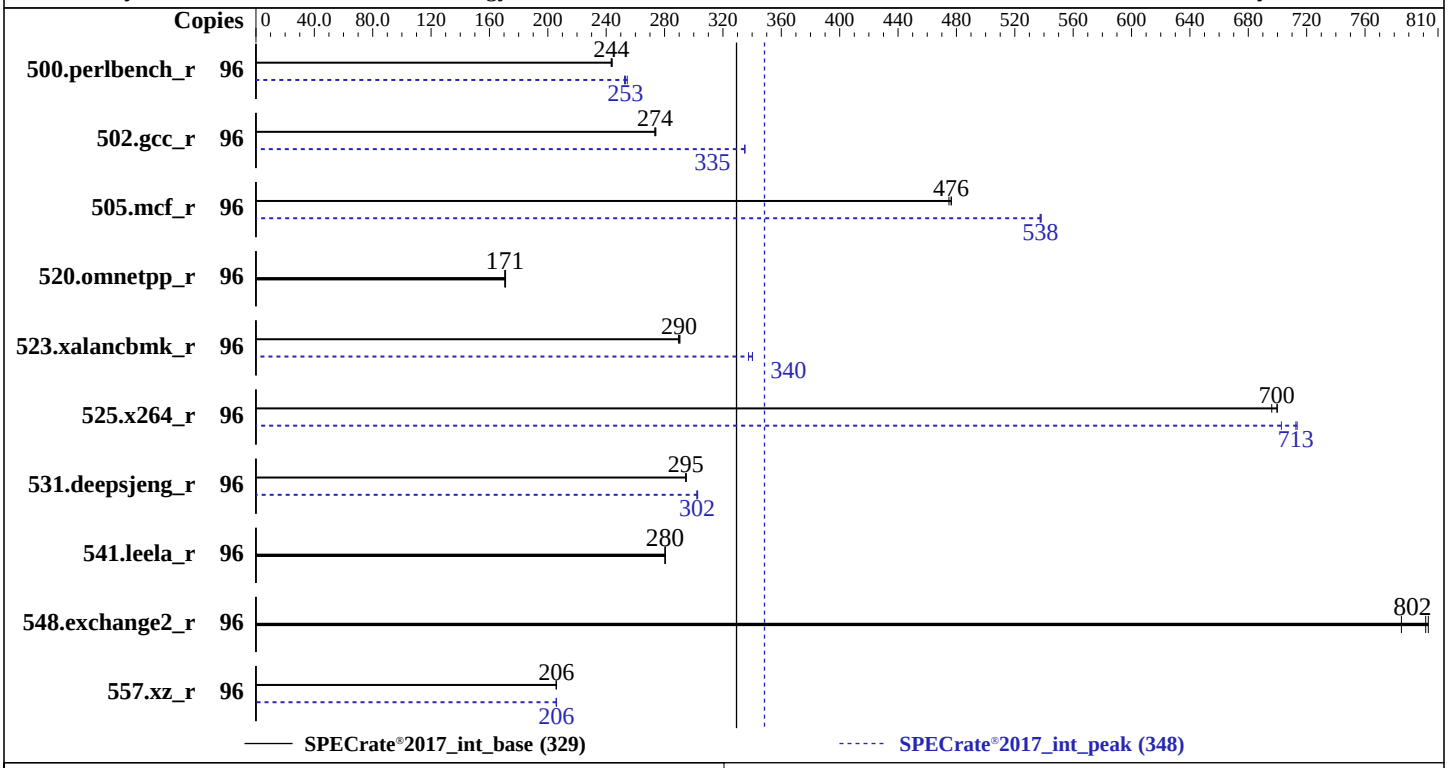

Hardware

CPU Name:	AMD EPYC 7352
Max MHz:	3200
Nominal:	2300
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	128 MB I+D on chip per chip, 16 MB shared / 3 cores
Other:	None
Memory:	1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.1 (Ootpa) Kernel 4.18.0-147.el8.x86_64
Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Parallel:	No
Firmware:	Lenovo BIOS Version D8E105P 1.00 released May-2020
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library v5.2.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665
2.30 GHz, AMD EPYC 7352

SPECrate®2017_int_base = 329

SPECrate®2017_int_peak = 348

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	628	243	626	244	**627**	**244**	96	605	253	**603**	**253**	601	254
502.gcc_r	96	496	274	497	273	**497**	**274**	96	**406**	**335**	406	335	406	335
505.mcf_r	96	326	476	**326**	**476**	327	475	96	289	537	288	538	**289**	**538**
520.omnetpp_r	96	738	171	736	171	**738**	**171**	96	738	171	736	171	**738**	**171**
523.xalancbmk_r	96	349	291	350	290	**349**	**290**	96	300	338	**298**	**340**	298	340
525.x264_r	96	**240**	**700**	240	700	241	696	96	236	713	**236**	**713**	239	703
531.deepsjeng_r	96	373	295	**373**	**295**	374	294	96	364	302	363	303	**364**	**302**
541.leela_r	96	567	281	567	280	**567**	**280**	96	567	281	567	280	**567**	**280**
548.exchange2_r	96	**314**	**802**	320	785	313	803	96	**314**	**802**	320	785	313	803
557.xz_r	96	503	206	504	206	**504**	**206**	96	**504**	**206**	504	206	503	206

SPECrate®2017_int_base = 329

SPECrate®2017_int_peak = 348

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).
```

(Continued on next page)

Operating System Notes (Continued)

```
Transparent huge pages set to 'always' for this run (OS default)
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.0-amd-rome-aocc200-C3/amd_rate_aocc200_rome_C_lib/64;
     /home/cpu2017-1.1.0-amd-rome-aocc200-C3/amd_rate_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.
jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2
```

Platform Notes

```
 BIOS settings:
 Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
 NUMA nodes per socket set to NPS4
 L2 Stream HW Prefetcher set to Disable

 Sysinfo program /home/cpu2017-1.1.0-amd-rome-aocc200-C3/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on localhost.localdomain Fri May 29 01:57:57 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo
```

(Continued on next page)

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : AMD EPYC 7352 24-Core Processor
      2  "physical id"s (chips)
      96 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 24
      siblings  : 48
      physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
      physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              96
     On-line CPU(s) list: 0-95
     Thread(s) per core:  2
     Core(s) per socket:  24
     Socket(s):           2
     NUMA node(s):        8
     Vendor ID:           AuthenticAMD
     CPU family:          23
     Model:               49
     Model name:          AMD EPYC 7352 24-Core Processor
     Stepping:            0
     CPU MHz:             2687.443
     CPU max MHz:         2300.0000
     CPU min MHz:         1500.0000
     BogoMIPS:            4591.21
     Virtualization:      AMD-V
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            512K
     L3 cache:            16384K
     NUMA node0 CPU(s):   0-5,48-53
     NUMA node1 CPU(s):   6-11,54-59
     NUMA node2 CPU(s):   12-17,60-65
     NUMA node3 CPU(s):   18-23,66-71
     NUMA node4 CPU(s):   24-29,72-77
     NUMA node5 CPU(s):   30-35,78-83
     NUMA node6 CPU(s):   36-41,84-89
     NUMA node7 CPU(s):   42-47,90-95
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
     constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
     pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
```

(Continued on next page)

Platform Notes (Continued)

```
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2
      smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1
      xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
      wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
      decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
      overflow_recov succor smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
   node 0 size: 128827 MB
   node 0 free: 128626 MB
   node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
   node 1 size: 129020 MB
   node 1 free: 128827 MB
   node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
   node 2 size: 128994 MB
   node 2 free: 128759 MB
   node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
   node 3 size: 129008 MB
   node 3 free: 128847 MB
   node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
   node 4 size: 129020 MB
   node 4 free: 128883 MB
   node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
   node 5 size: 129020 MB
   node 5 free: 128882 MB
   node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
   node 6 size: 129020 MB
   node 6 free: 128888 MB
   node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
   node 7 size: 129020 MB
   node 7 free: 128875 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  12  12  32  32  32  32
     1:  12  10  12  12  32  32  32  32
     2:  12  12  10  12  32  32  32  32
     3:  12  12  12  10  32  32  32  32
     4:  32  32  32  32  10  12  12  12
     5:  32  32  32  32  12  10  12  12
```

(Continued on next page)

Platform Notes (Continued)

```
     6:  32  32  32  32  12  12  10  12
     7:  32  32  32  32  12  12  12  10

 From /proc/meminfo
    MemTotal:       1056699100 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.1 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.1"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
       ANSI_COLOR="0;31"
    redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
    system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

 uname -a:
    Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-3620 (L1 Terminal Fault):        Not affected
 Microarchitectural Data Sampling:         Not affected
 CVE-2017-5754 (Meltdown):                 Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                           via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs barriers and __user
                                           pointer sanitization
 CVE-2017-5715 (Spectre variant 2):        Mitigation: Full AMD retpoline, IBPB:
                                          conditional, IBRS_FW, STIBP: conditional, RSB
                                           filling

 run-level 3 May 29 01:50

 SPEC is set to: /home/cpu2017-1.1.0-amd-rome-aocc200-C3
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sdb2      xfs   838G   31G  808G   4% /home

 From /sys/devices/virtual/dmi/id
     BIOS:    Lenovo D8E105P-1.00 05/08/2020
```

(Continued on next page)

Platform Notes (Continued)

```
     Vendor:  Lenovo
     Product: ThinkSystem SR665 MB
     Product Family: ThinkSystem
     Serial:  1234567890

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     32x Samsung M393A4G43AB3-CWE 32 kB 2 rank 3200

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:
```
clang
```

C++ benchmarks:
```
clang++
```

Fortran benchmarks:
```
flang
```

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

505.mcf_r: `-flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively -mllvm -function-specialize -mllvm -enable-gvn-hoist -mllvm -unroll-threshold=50 -fremap-arrays -mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp -mllvm -inline-threshold=1000 -flv-function-specialization -lmvec -lamdlibm -ljemalloc -lflang`

525.x264_r: `Same as 500.perlbench_r`

557.xz_r: `Same as 505.mcf_r`

C++ benchmarks:

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `-m32 -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -flv-function-specialization -mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000 -ljemalloc`

531.deepsjeng_r: `-flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -flv-function-specialization -mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc -lflang`

(Continued on next page)

Peak Optimization Flags (Continued)

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

Peak Other Flags

C benchmarks:

502.gcc_r: `-L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32`

C++ benchmarks:

523.xalancbmk_r: `-L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html`
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-K.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml`
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-K.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-28 13:57:56-0400.
Report generated on 2020-06-23 18:13:49 by CPU2017 PS formatter v6255.
Originally published on 2020-06-23.