



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M5, Intel Xeon Silver 4210R,  
2.40 GHz

**SPECrate®2017\_int\_base = 129**

**SPECrate®2017\_int\_peak = Not Run**

**CPU2017 License:** 19


**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Jul-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Apr-2020

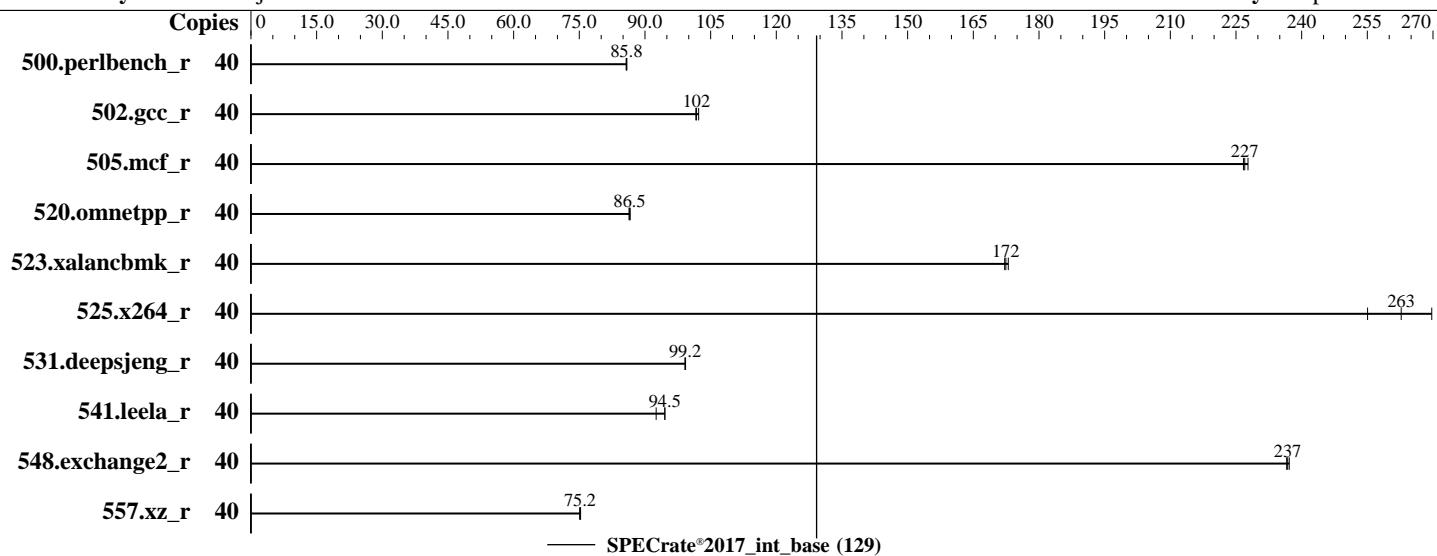

## Hardware

CPU Name: Intel Xeon Silver 4210R  
 Max MHz: 3200  
 Nominal: 2400  
 Enabled: 20 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 13.75 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R,  
 running at 2400)  
 Storage: 1 x SATA M.2 SSD, 480 GB  
 Other: None

## Software

OS: Red Hat Enterprise Linux release 8.0 (Ootpa)  
 4.18.0-80.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++  
 Compiler Build 20200306 for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran  
 Compiler Build 20200306 for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V5.0.0.14 R1.18.0 for D3384-B1x  
 released Feb-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: none  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M5, Intel Xeon Silver 4210R,  
2.40 GHz

**SPECrate®2017\_int\_base = 129**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	40	<b>742</b>	<b>85.8</b>	743	85.7	742	85.9							
502.gcc_r	40	554	102	557	102	<b>556</b>	<b>102</b>							
505.mcf_r	40	<b>285</b>	<b>227</b>	284	228	285	227							
520.omnetpp_r	40	608	86.4	606	86.6	<b>607</b>	<b>86.5</b>							
523.xalancbmk_r	40	245	172	<b>245</b>	<b>172</b>	244	173							
525.x264_r	40	<b>267</b>	<b>263</b>	260	270	275	255							
531.deepsjeng_r	40	462	99.2	<b>462</b>	<b>99.2</b>	462	99.3							
541.leela_r	40	716	92.6	<b>701</b>	<b>94.5</b>	701	94.5							
548.exchange2_r	40	442	237	443	237	<b>443</b>	<b>237</b>							
557.xz_r	40	<b>575</b>	<b>75.2</b>	574	75.3	575	75.1							

**SPECrate®2017\_int\_base = 129**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information

under Compiler Version section is due to a discrepancy in Intel Compiler.

The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-39

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

```
"/home/benchmark/speccpu/lib/intel64:/home/benchmark/speccpu/lib/ia32:/home/benchmark/speccpu/je5.0.1-32"
```

MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Silver 4210R,  
2.40 GHz

SPECrate®2017\_int\_base = 129

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jul-2020

Test Sponsor: Fujitsu

Hardware Availability: Feb-2020

Tested by: Fujitsu

Software Availability: Apr-2020

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Intel Virtualization Technology = Disabled  
VT-d = Disabled  
CPU C1E Support = Disabled  
LLC Dead Line Alloc = Disabled  
LLC prefetch = Enabled  
Sub NUMA Clustering = Disabled  
IMC Interleaving = 2-way  
Patrol Scrub = Disabled  
WR CRC feature Control = Disabled  
Fan Control = Full

Sysinfo program /home/benchmark/speccpu/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost.localdomain Thu Aug 6 11:09:48 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Silver 4210R CPU @ 2.40GHz
  2 "physical id"s (chips)
  40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 10
siblings   : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Silver 4210R,  
2.40 GHz

SPECrate®2017\_int\_base = 129

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jul-2020

Test Sponsor: Fujitsu

Hardware Availability: Feb-2020

Tested by: Fujitsu

Software Availability: Apr-2020

## Platform Notes (Continued)

physical 1: cores 0 1 2 3 4 8 9 10 11 12

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                40
On-line CPU(s) list:   0-39
Thread(s) per core:    2
Core(s) per socket:    10
Socket(s):              2
NUMA node(s):           2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:             Intel(R) Xeon(R) Silver 4210R CPU @ 2.40GHz
Stepping:               7
CPU MHz:                1364.407
CPU max MHz:            3200.0000
CPU min MHz:            1000.0000
BogoMIPS:               4800.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                14080K
NUMA node0 CPU(s):      0-9,20-29
NUMA node1 CPU(s):      10-19,30-39
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpn rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni flush_l1d arch_capabilities
```

/proc/cpuinfo cache data  
cache size : 14080 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Silver 4210R,  
2.40 GHz

SPECrate®2017\_int\_base = 129

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jul-2020

Test Sponsor: Fujitsu

Hardware Availability: Feb-2020

Tested by: Fujitsu

Software Availability: Apr-2020

## Platform Notes (Continued)

```
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
node 0 size: 385558 MB
node 0 free: 384923 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
node 1 size: 387067 MB
node 1 free: 386351 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10

From /proc/meminfo
MemTotal:           791169008 kB
HugePages_Total:      0
Hugepagesize:        2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.0 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.0"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga

uname -a:
Linux localhost.localdomain 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:            No status reported
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass):  Mitigation: Speculative Store Bypass disabled
                                                via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):          Mitigation: Enhanced IBRS, IBPB: conditional,
                                                RSB filling

run-level 3 Aug 6 11:08
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Silver 4210R,  
2.40 GHz

SPECrate®2017\_int\_base = 129

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jul-2020

Test Sponsor: Fujitsu

Hardware Availability: Feb-2020

Tested by: Fujitsu

Software Availability: Apr-2020

## Platform Notes (Continued)

SPEC is set to: /home/benchmark/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	168G	53G	116G	32%	/home

From /sys/devices/virtual/dmi/id

BIOS: FUJITSU // American Megatrends Inc. V5.0.0.14 R1.18.0 for D3384-B1x  
02/10/2020

Vendor: FUJITSU

Product: PRIMERGY RX2540 M5

Product Family: SERVER

Serial: YMSQXXXXXX

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933  
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base)  
| 525.x264\_r(base) 557.xz\_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
| 541.leela\_r(base)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2\_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Silver 4210R,  
2.40 GHz

SPECrate®2017\_int\_base = 129

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jul-2020

Test Sponsor: Fujitsu

Hardware Availability: Feb-2020

Tested by: Fujitsu

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops  
-fuse-lld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Silver 4210R,  
2.40 GHz

SPECrate®2017\_int\_base = 129

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compiler_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compiler_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevF.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevF.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-08-05 22:09:48-0400.

Report generated on 2020-09-01 19:15:13 by CPU2017 PDF formatter v6255.

Originally published on 2020-09-01.