



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2029U-E1CR4  
(X11DPU , Intel Xeon Gold 5220R)

**SPECrate®2017\_int\_base = 294**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

**Test Date:** Dec-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Aug-2020

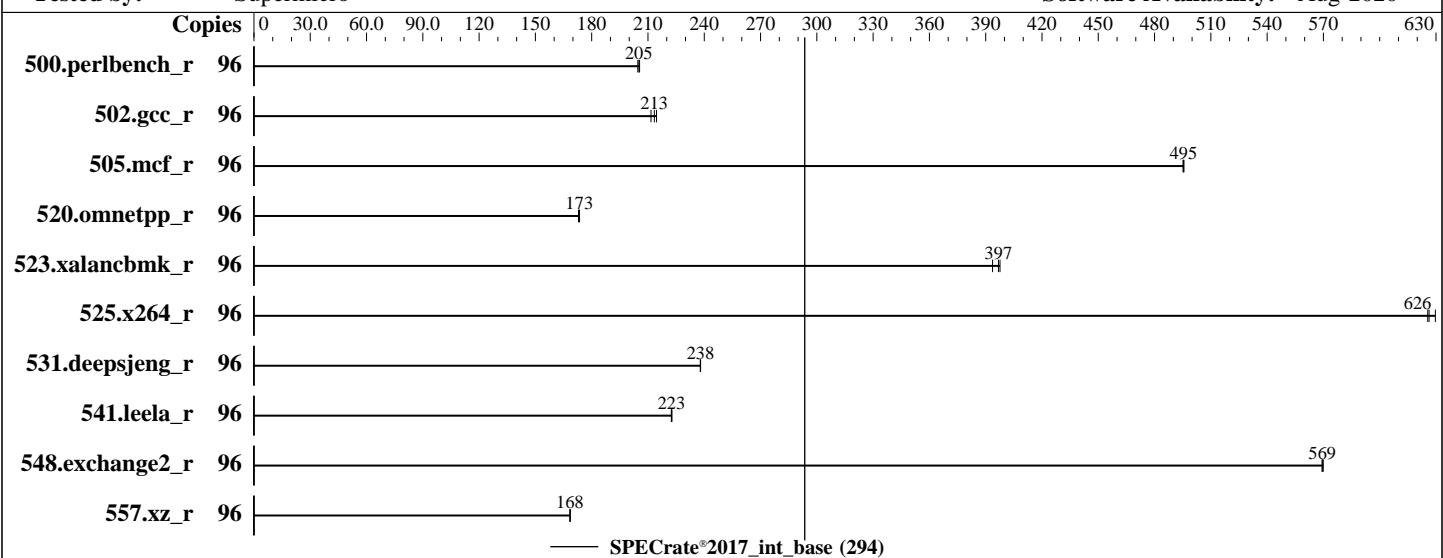

### Hardware

CPU Name: Intel Xeon Gold 5220R  
Max MHz: 4000  
Nominal: 2200  
Enabled: 48 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 35.75 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC4-2933Y-R, running at 2666)  
Storage: 1 x 200 GB SATA III SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux release 8.2  
Compiler: Kernel 4.18.0-193.el8.x86\_64  
C/C++: Version 19.1.2.275 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.1.2.275 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Version 3.4 released Oct-2020  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2029U-E1CR4  
(X11DPU , Intel Xeon Gold 5220R)

**SPECrate®2017\_int\_base = 294**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Dec-2020

Hardware Availability: Feb-2020

Software Availability: Aug-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	<b>745</b>	<b>205</b>	744	206	747	205							
502.gcc_r	96	<b>637</b>	<b>213</b>	642	212	634	215							
505.mcf_r	96	313	496	313	495	<b>313</b>	<b>495</b>							
520.omnetpp_r	96	726	174	<b>726</b>	<b>173</b>	728	173							
523.xalancbmk_r	96	255	398	<b>255</b>	<b>397</b>	258	394							
525.x264_r	96	<b>268</b>	<b>626</b>	269	626	267	630							
531.deepsjeng_r	96	462	238	462	238	<b>462</b>	<b>238</b>							
541.leela_r	96	715	222	714	223	<b>714</b>	<b>223</b>							
548.exchange2_r	96	442	569	<b>442</b>	<b>569</b>	441	570							
557.xz_r	96	615	169	616	168	<b>616</b>	<b>168</b>							

**SPECrate®2017\_int\_base = 294**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-
    32"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2029U-E1CR4  
(X11DPU , Intel Xeon Gold 5220R)

SPECrate®2017\_int\_base = 294

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Dec-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Aug-2020

## General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY\_PERF\_BIAS\_CFG mode = Extreme Performance

SNC = Enable

Stale AtoS = Disable

IMC Interleaving = 1-way Interleave

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
running on X11DPU-01 Tue Dec 22 02:01:41 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5220R CPU @ 2.20GHz
        2 "physical id"s (chips)
        96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings   : 48
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):              96
On-line CPU(s) list: 0-95
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2029U-E1CR4  
(X11DPU , Intel Xeon Gold 5220R)

SPECrate®2017\_int\_base = 294

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Dec-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Aug-2020

## Platform Notes (Continued)

Thread(s) per core: 2  
Core(s) per socket: 24  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5220R CPU @ 2.20GHz  
Stepping: 7  
CPU MHz: 2900.003  
CPU max MHz: 4000.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4400.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 36608K  
NUMA node0 CPU(s): 0-3,7-9,13-15,19,20,48-51,55-57,61-63,67,68  
NUMA node1 CPU(s): 4-6,10-12,16-18,21-23,52-54,58-60,64-66,69-71  
NUMA node2 CPU(s): 24-27,31-33,37-39,43,44,72-75,79-81,85-87,91,92  
NUMA node3 CPU(s): 28-30,34-36,40-42,45-47,76-78,82-84,88-90,93-95  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtTopology nonstop\_tsc cpuid aperf mpf perf pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni md\_clear flush\_lld arch\_capabilities

/proc/cpuinfo cache data  
cache size : 36608 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 48 49 50 51 55 56 57 61 62 63 67 68  
node 0 size: 385655 MB  
node 0 free: 385354 MB  
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 52 53 54 58 59 60 64 65 66 69 70 71  
node 1 size: 387066 MB  
node 1 free: 386842 MB  
node 2 cpus: 24 25 26 27 31 32 33 37 38 39 43 44 72 73 74 75 79 80 81 85 86 87 91 92

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2029U-E1CR4  
(X11DPU , Intel Xeon Gold 5220R)

SPECrate®2017\_int\_base = 294

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Dec-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Aug-2020

## Platform Notes (Continued)

```
node 2 size: 387066 MB
node 2 free: 386816 MB
node 3 cpus: 28 29 30 34 35 36 40 41 42 45 46 47 76 77 78 82 83 84 88 89 90 93 94 95
node 3 size: 387038 MB
node 3 free: 385662 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

From /proc/meminfo
MemTotal:           1583950048 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:
Linux X11DPU-01 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

itlb_multihit:                                     KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):                 Not affected
Microarchitectural Data Sampling:                  Not affected
CVE-2017-5754 (Meltdown):                         Not affected
CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store Bypass disabled
                                                       via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):                Mitigation: usercopy/swapgs barriers and __user
                                                       pointer sanitization
CVE-2017-5715 (Spectre variant 2):                Mitigation: Enhanced IBRS, IBPB: conditional,
                                                       RSB filling
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2029U-E1CR4  
(X11DPU , Intel Xeon Gold 5220R)

SPECrate®2017\_int\_base = 294

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Dec-2020

Hardware Availability: Feb-2020

Software Availability: Aug-2020

## Platform Notes (Continued)

tsx\_async\_abort:

Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Dec 22 01:56

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	184G	18G	166G	10%	/

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 3.4 10/30/2020

Vendor: Supermicro

Product: SuperServer 2029U-E1CR4

Serial: 0123456789

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x SK Hynix HMAA8GR7AJR4N-WM 64 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base)  
| 525.x264\_r(base) 557.xz\_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
| 541.leela\_r(base)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2\_r(base)

=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2029U-E1CR4  
(X11DPU , Intel Xeon Gold 5220R)

SPECrate®2017\_int\_base = 294

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Dec-2020

Test Sponsor: Supermicro

Hardware Availability: Feb-2020

Tested by: Supermicro

Software Availability: Aug-2020

## Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.2.275 Build 20200623  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.3.275/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2029U-E1CR4  
(X11DPU , Intel Xeon Gold 5220R)

SPECrate®2017\_int\_base = 294

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Dec-2020

Hardware Availability: Feb-2020

Software Availability: Aug-2020

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fsto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revG.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revG.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-12-21 13:01:40-0500.

Report generated on 2021-01-05 14:43:55 by CPU2017 PDF formatter v6255.

Originally published on 2021-01-05.