



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 573

ThinkSystem SR850 V2  
(3.10 GHz, Intel Xeon Platinum 8354H)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

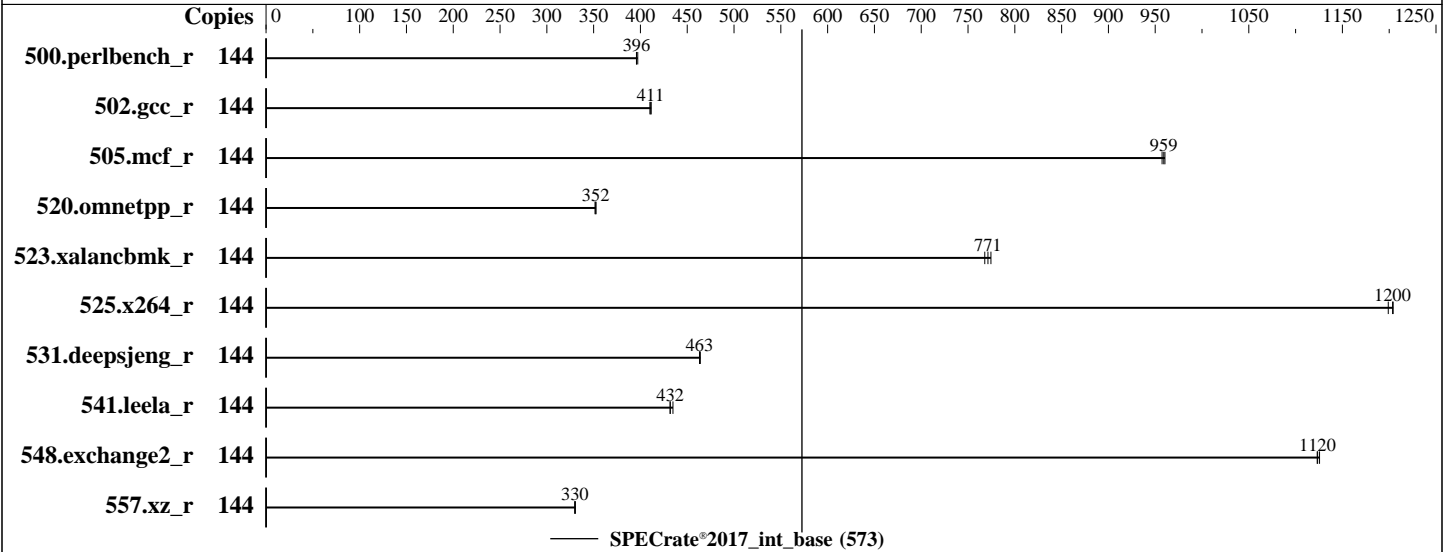

### Hardware

CPU Name: Intel Xeon Platinum 8354H  
 Max MHz: 4300  
 Nominal: 3100  
 Enabled: 72 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.2 (Ootpa)  
 Kernel 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 19.1.2.275 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.1.2.275 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version M5E107I 1.01 released Nov-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 573

ThinkSystem SR850 V2  
(3.10 GHz, Intel Xeon Platinum 8354H)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Dec-2020  
Hardware Availability: Nov-2020  
Software Availability: Aug-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	577	397	<b>579</b>	<b>396</b>	579	396							
502.gcc_r	144	496	411	<b>496</b>	<b>411</b>	497	410							
505.mcf_r	144	242	960	<b>243</b>	<b>959</b>	243	957							
520.omnetpp_r	144	536	352	<b>536</b>	<b>352</b>	538	351							
523.xalancbmk_r	144	196	774	198	768	<b>197</b>	<b>771</b>							
525.x264_r	144	<b>209</b>	<b>1200</b>	210	1200	209	1200							
531.deepsjeng_r	144	<b>356</b>	<b>463</b>	356	464	356	463							
541.leela_r	144	<b>552</b>	<b>432</b>	552	432	549	435							
548.exchange2_r	144	336	1120	335	1130	<b>336</b>	<b>1120</b>							
557.xz_r	144	471	330	472	330	<b>471</b>	<b>330</b>							

SPECrate®2017\_int\_base = 573

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.0-ic19.1u2/lib/intel64:/home/cpu2017-1.1.0-ic19.1u2/lib/ia32:/home/cpu2017-1.1.0-ic19.1u2/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 573

ThinkSystem SR850 V2  
(3.10 GHz, Intel Xeon Platinum 8354H)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

### General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
C-States set to Legacy  
Adjacent Cache Prefetcher set to Disabled  
DCU Streamer Prefetcher set to Disabled  
SNC set to Enabled  
LLC dead line alloc set to Disable

sysinfo program /home/cpu2017-1.1.0-ic19.lu2/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost.localdomain Mon Dec 28 03:14:42 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8354H CPU @ 3.10GHz  
4 "physical id"s (chips)  
144 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 18  
siblings : 36  
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 144  
On-line CPU(s) list: 0-143

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 573

ThinkSystem SR850 V2  
(3.10 GHz, Intel Xeon Platinum 8354H)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

### Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 18
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8354H CPU @ 3.10GHz
Stepping: 11
CPU MHz: 1568.523
CPU max MHz: 4300.0000
CPU min MHz: 1000.0000
BogoMIPS: 6200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-2,5,6,9,10,14,15,72-74,77,78,81,82,86,87
NUMA node1 CPU(s): 3,4,7,8,11-13,16,17,75,76,79,80,83-85,88,89
NUMA node2 CPU(s): 18-20,23,24,27,28,32,33,90-92,95,96,99,100,104,105
NUMA node3 CPU(s): 21,22,25,26,29-31,34,35,93,94,97,98,101-103,106,107
NUMA node4 CPU(s): 36-38,41,42,45,46,50,51,108-110,113,114,117,118,122,123
NUMA node5 CPU(s): 39,40,43,44,47-49,52,53,111,112,115,116,119-121,124,125
NUMA node6 CPU(s): 54-56,59,60,63,64,68,69,126-128,131,132,135,136,140,141
NUMA node7 CPU(s): 57,58,61,62,65-67,70,71,129,130,133,134,137-139,142,143
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req pku ospke avx512_vnni md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 9 10 14 15 72 73 74 77 78 81 82 86 87
node 0 size: 193121 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 573

ThinkSystem SR850 V2  
(3.10 GHz, Intel Xeon Platinum 8354H)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

### Platform Notes (Continued)

```

node 0 free: 192934 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 75 76 79 80 83 84 85 88 89
node 1 size: 193504 MB
node 1 free: 193333 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 90 91 92 95 96 99 100 104 105
node 2 size: 193531 MB
node 2 free: 193190 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 93 94 97 98 101 102 103 106 107
node 3 size: 193531 MB
node 3 free: 193388 MB
node 4 cpus: 36 37 38 41 42 45 46 50 51 108 109 110 113 114 117 118 122 123
node 4 size: 193531 MB
node 4 free: 193250 MB
node 5 cpus: 39 40 43 44 47 48 49 52 53 111 112 115 116 119 120 121 124 125
node 5 size: 193531 MB
node 5 free: 193351 MB
node 6 cpus: 54 55 56 59 60 63 64 68 69 126 127 128 131 132 135 136 140 141
node 6 size: 193531 MB
node 6 free: 193381 MB
node 7 cpus: 57 58 61 62 65 66 67 70 71 129 130 133 134 137 138 139 142 143
node 7 size: 193529 MB
node 7 free: 193371 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 11 20 20 20 20 20 20
 1:  11 10 20 20 20 20 20 20
 2:  20 20 10 11 20 20 20 20
 3:  20 20 11 10 20 20 20 20
 4:  20 20 20 20 10 11 20 20
 5:  20 20 20 20 11 10 20 20
 6:  20 20 20 20 20 20 10 11
 7:  20 20 20 20 20 20 11 10

```

From /proc/meminfo

```

MemTotal:      1584960992 kB
HugePages_Total:      0
Hugepagesize:      2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 573

ThinkSystem SR850 V2  
(3.10 GHz, Intel Xeon Platinum 8354H)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

### Platform Notes (Continued)

```
ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
```

```
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
```

```
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

```
uname -a:
```

```
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

itlb_multihit:	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
tsx_async_abort:	Not affected

```
run-level 3 Dec 28 03:12
```

```
SPEC is set to: /home/cpu2017-1.1.0-ic19.1u2
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xf	838G	41G	797G	5%	/home

```
From /sys/devices/virtual/dmi/id
```

```
BIOS: Lenovo M5E107I-1.01 11/02/2020
```

```
Vendor: Lenovo
```

```
Product: ThinkSystem SR850 V2
```

```
Product Family: ThinkSystem
```

```
Serial: none
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
48x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 573

ThinkSystem SR850 V2  
(3.10 GHz, Intel Xeon Platinum 8354H)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

## Compiler Version Notes

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
          | 525.x264_r(base) 557.xz_r(base)
-----
```

```
Intel(R) C Compiler for applications running on Intel(R) 64, Version
19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
          | 541.leela_r(base)
-----
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version
19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran   | 548.exchange2_r(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 573

ThinkSystem SR850 V2  
(3.10 GHz, Intel Xeon Platinum 8354H)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Dec-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

## Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmallo
```

### C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmallo
```

### Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmallo
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-A.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-A.xml>





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR850 V2  
(3.10 GHz, Intel Xeon Platinum 8354H)

SPECrate®2017\_int\_base = 573

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2020

**Hardware Availability:** Nov-2020

**Software Availability:** Aug-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-12-27 14:14:42-0500.

Report generated on 2021-01-19 16:57:38 by CPU2017 PDF formatter v6255.

Originally published on 2021-01-19.