



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061


Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

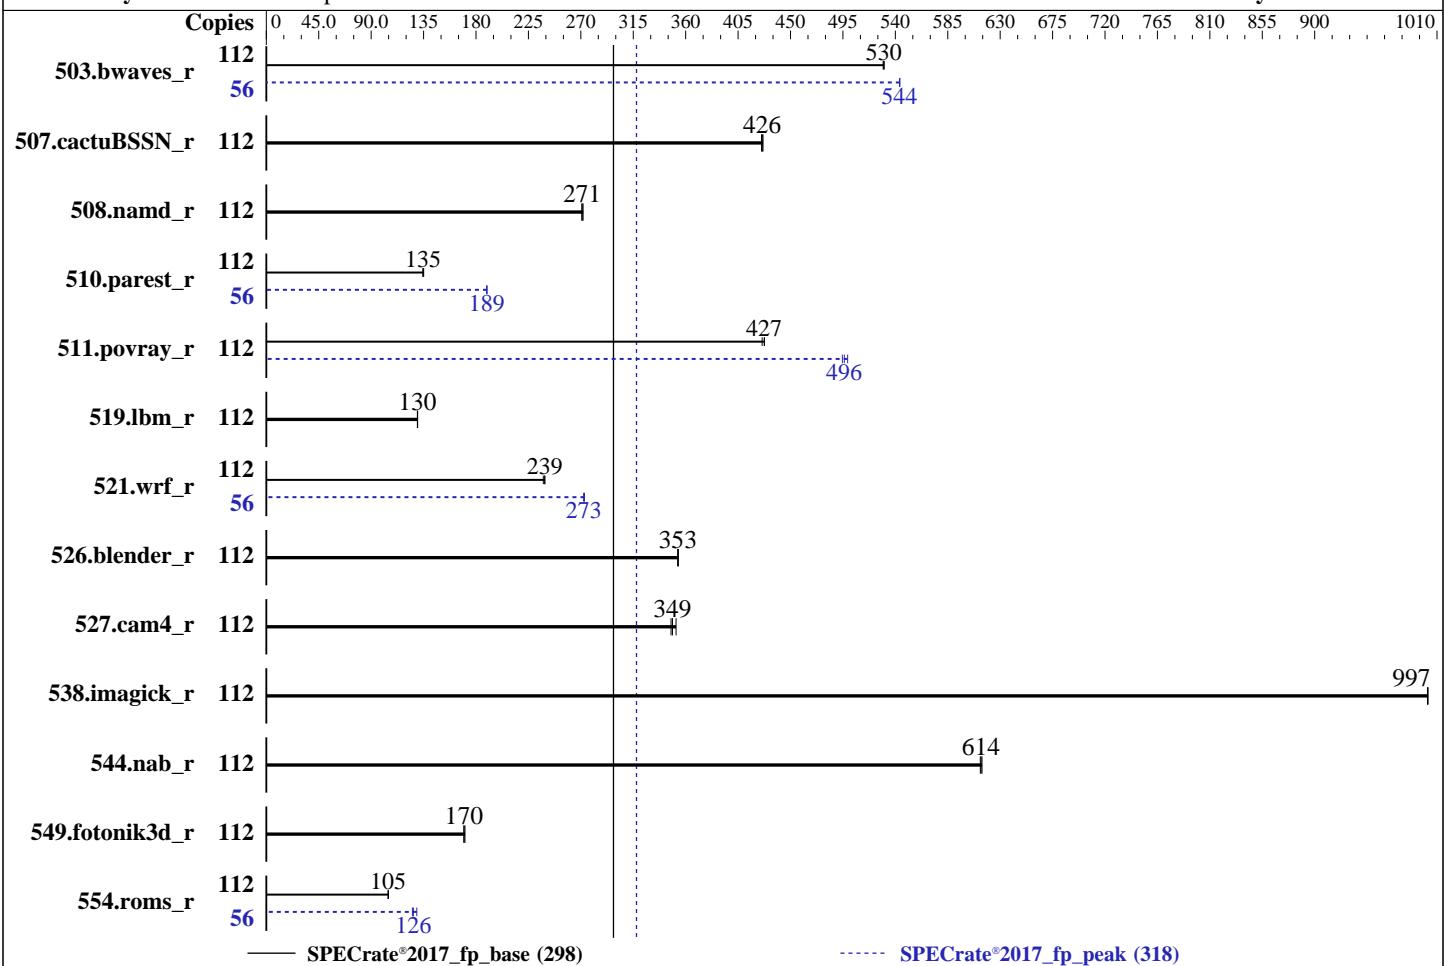

— SPECrate®2017_fp_base (298)
----- SPECrate®2017_fp_peak (318)

Hardware

CPU Name: Intel Xeon Platinum 8280
Max MHz: 4000
Nominal: 2700
Enabled: 56 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 38.5 MB I+D on chip per chip
Other: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)
Storage: 2 x 1200 GB SAS HDD 10000 RPM, RAID1
Other: None

OS:

Red Hat Enterprise Linux release 8.2 (Ootpa)
4.18.0-193.el8.x86_64

Compiler:

C/C++: Version 19.1.1.217 of Intel C/C++
Compiler Build 20200306 for Linux;
Fortran: Version 19.1.1.217 of Intel Fortran
Compiler Build 20200306 for Linux

Parallel:

No

Firmware:

Version 03.20.0200 released Dec-2020

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc: jemalloc memory allocator library
V5.0.1

Power Management:

BIOS and OS set to prefer performance at the cost
of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	2119	530	2121	530	2117	530	56	1033	544	1033	544	1033	544		
507.cactusBSSN_r	112	333	426	333	426	334	425	112	333	426	333	426	334	425		
508.namd_r	112	391	272	393	271	392	271	112	391	272	393	271	392	271		
510.parest_r	112	2179	134	2169	135	2178	135	56	773	189	774	189	774	189		
511.povray_r	112	612	428	614	426	612	427	112	524	499	527	496	529	495		
519.lbm_r	112	909	130	909	130	910	130	112	909	130	909	130	910	130		
521.wrf_r	112	1050	239	1055	238	1049	239	56	460	273	459	273	460	273		
526.blender_r	112	483	353	483	353	482	354	112	483	353	483	353	482	354		
527.cam4_r	112	557	352	562	349	564	347	112	557	352	562	349	564	347		
538.imagick_r	112	279	997	279	997	279	997	112	279	997	279	997	279	997		
544.nab_r	112	307	614	307	614	308	613	112	307	614	307	614	308	613		
549.fotonik3d_r	112	2559	171	2571	170	2574	170	112	2559	171	2571	170	2574	170		
554.roms_r	112	1702	105	1699	105	1698	105	56	689	129	709	125	705	126		

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.

The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/spec/lib/intel64:/home/spec/je5.0.1-64"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

The jemalloc library was configured and built at default for 32bit (i686) and 64bit (x86_64) targets; built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5; sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

ENERGY_PERF_BIAS_CFG mode = performance

SNC = Enabled

IMC interleaving = 1-way

SR-IOV Support = Disabled

Sysinfo program /home/spec/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Thu Feb 18 22:26:48 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
  2 "physical id"s (chips)
  112 "processors"
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 28
siblings   : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
           28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
           28 29 30
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                112
On-line CPU(s) list:  0-111
Thread(s) per core:   2
Core(s) per socket:   28
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping:               6
CPU MHz:               3300.511
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
BogoMIPS:              5400.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              39424K
NUMA node0 CPU(s):    0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
NUMA node1 CPU(s):    4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
NUMA node2 CPU(s):    28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
NUMA node3 CPU(s):    32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
                      aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
                      invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
                      ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
                      avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
                      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

Platform Notes (Continued)

```
dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

```
available: 4 nodes (0-3)
```

```
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
79
```

```
node 0 size: 95079 MB
```

```
node 0 free: 79667 MB
```

```
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
82 83
```

```
node 1 size: 96761 MB
```

```
node 1 free: 85130 MB
```

```
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
101 105 106 107
```

```
node 2 size: 96734 MB
```

```
node 2 free: 85863 MB
```

```
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
108 109 110 111
```

```
node 3 size: 96728 MB
```

```
node 3 free: 85720 MB
```

```
node distances:
```

```
node 0 1 2 3
```

```
0: 10 11 21 21
```

```
1: 11 10 21 21
```

```
2: 21 21 10 11
```

```
3: 21 21 11 10
```

```
From /proc/meminfo
```

```
MemTotal: 394551536 kB
```

```
HugePages_Total: 0
```

```
Hugepagesize: 2048 kB
```

```
/sbin/tuned-adm active
```

```
Current active profile: latency-performance
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
From /etc/*release* /etc/*version*
```

```
os-release:
```

```
NAME="Red Hat Enterprise Linux"
```

```
VERSION="8.2 (Ootpa)"
```

```
ID="rhel"
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

Platform Notes (Continued)

```
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Feb 18 14:25

SPEC is set to: /home/spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.1T	58G	1005G	6%	/home

From /sys/devices/virtual/dmi/id

Vendor:	ZTE
Product Family:	Server

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A2K43DB2-CVF 16 GB 2 rank 2933, configured at 2934

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

Platform Notes (Continued)

BIOS:

BIOS Vendor: ZTE
BIOS Version: 03.20.0200
BIOS Date: 12/12/2020
BIOS Revision: 3.20

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base) 526.blender_r(base, peak)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECCrate®2017_fp_base = 298

SPECCrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

Compiler Version Notes (Continued)

=====

Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 521.wrf_r(peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 521.wrf_r(peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -fnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -fopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Feb-2021

Hardware Availability: Dec-2020

Software Availability: Dec-2020

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Feb-2021

Hardware Availability: Dec-2020

Software Availability: Dec-2020

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -m64 -qnextgen
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-V1.1.html>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G4 Server System
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017_fp_base = 298

SPECrate®2017_fp_peak = 318

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.l1l-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-18 22:26:47-0500.

Report generated on 2021-03-16 15:24:58 by CPU2017 PDF formatter v6255.

Originally published on 2021-03-16.