



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro


SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

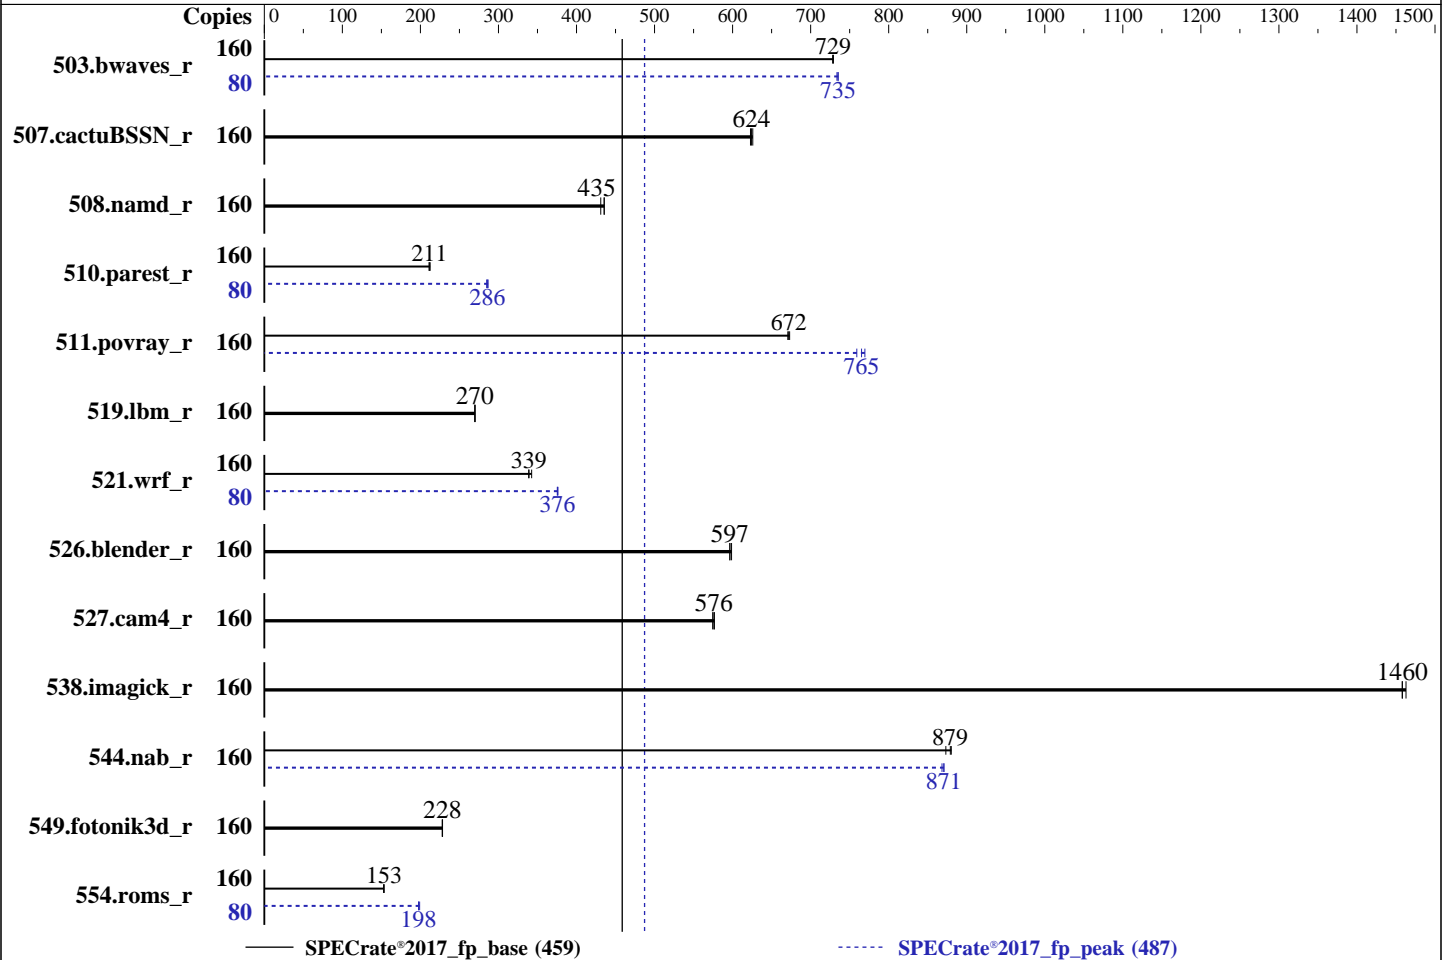

Hardware

CPU Name: Intel Xeon Platinum 8380
Max MHz: 3400
Nominal: 2300
Enabled: 80 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 512 GB SATA III SSD
Other: None

Software

OS: Red Hat Enterprise Linux 8.0
Kernel 4.18.0-80.el8.x86_64
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel: No
Firmware: Version T20210323095242 released Mar-2021
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	2202	729	2201	729	2203	728	80	1091	735	1093	734	1091	735
507.cactuBSSN_r	160	324	624	324	626	325	623	160	324	624	324	626	325	623
508.namd_r	160	349	436	353	431	349	435	160	349	436	353	431	349	435
510.parest_r	160	1983	211	1970	212	1979	211	80	735	285	732	286	730	287
511.povray_r	160	557	671	555	673	556	672	160	486	770	492	759	488	765
519.lbm_r	160	625	270	625	270	625	270	160	625	270	625	270	625	270
521.wrf_r	160	1058	339	1046	343	1057	339	80	477	375	477	376	476	376
526.blender_r	160	409	597	407	599	409	597	160	409	597	407	599	409	597
527.cam4_r	160	485	577	487	574	486	576	160	485	577	487	574	486	576
538.imagick_r	160	273	1460	273	1460	272	1460	160	273	1460	273	1460	272	1460
544.nab_r	160	306	880	306	879	308	873	160	309	871	309	871	310	868
549.fotonik3d_r	160	2735	228	2733	228	2730	228	160	2735	228	2733	228	2730	228
554.roms_r	160	1658	153	1658	153	1663	153	80	643	198	643	198	639	199

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
Patrol Scrub = Disable
SNC = Enable
LLC dead line alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Mon Mar 29 12:54:37 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
2 "physical id"s (chips)
160 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 40
siblings : 80
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

From lscpu:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                160
On-line CPU(s) list:  0-159
Thread(s) per core:    2
Core(s) per socket:    40
Socket(s):             2
NUMA node(s):         8
Vendor ID:             GenuineIntel
CPU family:            6
Model:                106
Model name:            Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
Stepping:              6
CPU MHz:               3000.000
CPU max MHz:           3400.0000
CPU min MHz:           800.0000
BogoMIPS:              4600.00
Virtualization:       VT-x
L1d cache:             48K
L1i cache:             32K
L2 cache:              1280K
L3 cache:              61440K
NUMA node0 CPU(s):    0-9,80-89
NUMA node1 CPU(s):    10-19,90-99
NUMA node2 CPU(s):    20-29,100-109
NUMA node3 CPU(s):    30-39,110-119
NUMA node4 CPU(s):    40-49,120-129
NUMA node5 CPU(s):    50-59,130-139
NUMA node6 CPU(s):    60-69,140-149
NUMA node7 CPU(s):    70-79,150-159

```

```

Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid pconfig flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 61440 KB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 80 81 82 83 84 85 86 87 88 89
node 0 size: 64251 MB
node 0 free: 53884 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 90 91 92 93 94 95 96 97 98 99
node 1 size: 64057 MB
node 1 free: 55844 MB
node 2 cpus: 20 21 22 23 24 25 26 27 28 29 100 101 102 103 104 105 106 107 108 109
node 2 size: 64507 MB
node 2 free: 56558 MB
node 3 cpus: 30 31 32 33 34 35 36 37 38 39 110 111 112 113 114 115 116 117 118 119
node 3 size: 64507 MB
node 3 free: 56620 MB
node 4 cpus: 40 41 42 43 44 45 46 47 48 49 120 121 122 123 124 125 126 127 128 129
node 4 size: 64507 MB
node 4 free: 56623 MB
node 5 cpus: 50 51 52 53 54 55 56 57 58 59 130 131 132 133 134 135 136 137 138 139
node 5 size: 64483 MB
node 5 free: 56559 MB
node 6 cpus: 60 61 62 63 64 65 66 67 68 69 140 141 142 143 144 145 146 147 148 149
node 6 size: 64507 MB
node 6 free: 56621 MB
node 7 cpus: 70 71 72 73 74 75 76 77 78 79 150 151 152 153 154 155 156 157 158 159
node 7 size: 64503 MB
node 7 free: 56593 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 20 20 20 20 20 20 20
1:  20 10 20 20 20 20 20 20
2:  20 20 10 20 20 20 20 20
3:  20 20 20 10 20 20 20 20
4:  20 20 20 20 10 20 20 20
5:  20 20 20 20 20 10 20 20
6:  20 20 20 20 20 20 10 20
7:  20 20 20 20 20 20 20 10

```

```

From /proc/meminfo
MemTotal:      527695360 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Platform Notes (Continued)

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*
os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.0 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.0"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	No status reported
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	No status reported

run-level 3 Mar 29 04:58

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	410G	357G	54G	88%	/home

From /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: Family

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Platform Notes (Continued)

Serial: 0123456789

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x SK Hynix HMA84GR7CJR4N-XN 32 GB 2 rank 3200

BIOS:
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: T20210323095242
BIOS Date: 03/23/2021
BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(peak)
=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(peak)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Compiler Version Notes (Continued)

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Compiler Version Notes (Continued)

Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

521.wrf_r: ifort icc

527.cam4_r: ifort icx

Benchmarks using both C and C++:

511.povray_r: icpc icc

526.blender_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -flto
-Ofast -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8380)

SPECrate®2017_fp_base = 459

SPECrate®2017_fp_peak = 487

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Peak Optimization Flags (Continued)

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.2021-04-14.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.2021-04-14.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-03-29 00:54:37-0400.

Report generated on 2021-04-14 14:18:33 by CPU2017 PDF formatter v6442.

Originally published on 2021-04-13.