



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

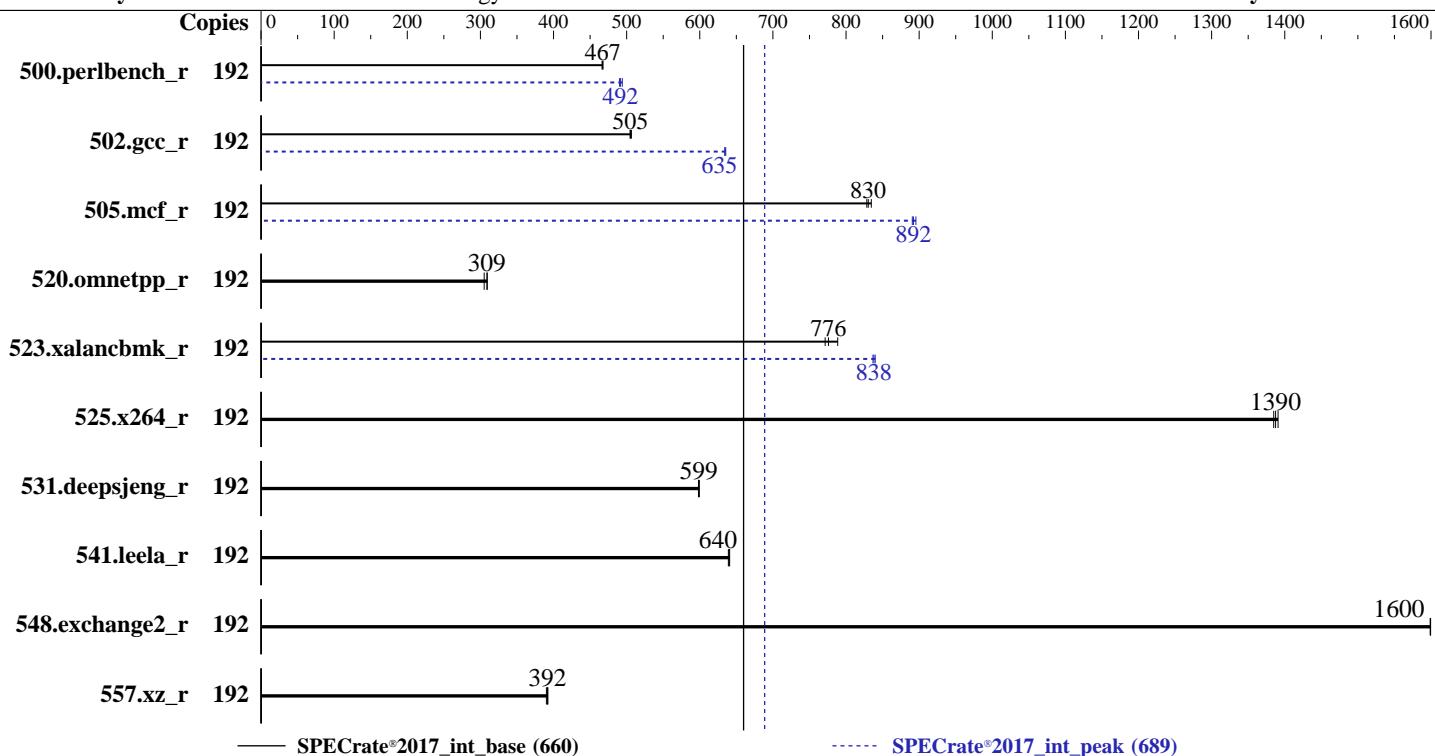

Hardware		Software	
CPU Name:	AMD EPYC 7643	OS:	SUSE Linux Enterprise Server 15 SP2 (x86_64)
Max MHz:	3600	Compiler:	Kernel 5.3.18-22-default
Nominal:	2300	Parallel:	C/C++/Fortran: Version 3.0.0 of AOCC
Enabled:	96 cores, 2 chips, 2 threads/core	Firmware:	No
Orderable:	1,2 chips	File System:	Lenovo BIOS Version D8E115E 2.01 released Mar-2021
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	xfs
L2:	512 KB I+D on chip per core	Base Pointers:	Run level 3 (multi-user)
L3:	256 MB I+D on chip per chip, 32 MB shared / 6 cores	Peak Pointers:	64-bit
Other:	None	Other:	32/64-bit
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)	Power Management:	jemalloc: jemalloc memory allocator library v5.1.0
Storage:	1 x 960 GB SATA SSD		BIOS set to prefer performance at the cost of additional power usage
Other:	None		



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	654	467	654	468	655	466	192	622	492	619	494	623	490		
502.gcc_r	192	539	505	537	506	538	505	192	429	634	428	635	428	636		
505.mcf_r	192	372	835	374	830	375	828	192	348	892	346	896	348	891		
520.omnetpp_r	192	814	309	826	305	815	309	192	814	309	826	305	815	309		
523.xalancbmk_r	192	263	771	257	789	261	776	192	242	837	241	840	242	838		
525.x264_r	192	242	1390	243	1380	242	1390	192	242	1390	243	1380	242	1390		
531.deepsjeng_r	192	367	599	368	598	367	599	192	367	599	368	598	367	599		
541.leela_r	192	496	641	498	639	497	640	192	496	641	498	639	497	640		
548.exchange2_r	192	315	1600	315	1600	315	1600	192	315	1600	315	1600	315	1600		
557.xz_r	192	531	390	529	392	529	392	192	531	390	529	392	529	392		

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).

'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base integer runs to enable THP only on request.

'echo 0 > /proc/sys/kernel numa_balancing' run as root to eliminate NUMA location probing; the workloads are all bound to specific NUMA nodes.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.5-amd-aocc300-milan-A1/amd_rate_aocc300_milan_A_lib/6
     4;/home/cpu2017-1.1.5-amd-aocc300-milan-A1/amd_rate_aocc300_milan_A_lib/
      32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance and then set it to Custom Mode

4-Link xGMI Max Speed set to 16Gbps

SOC P-States set to P0

NUMA nodes per socket set to NPS4

ACPI SRAT L3 Cache as NUMA Domain set to Enable

L2 Stream HW Prefetcher set to Disable

Memory interleaving set to Disabled

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Platform Notes (Continued)

```
Sysinfo program /home/cpu2017-1.1.5-amd-aocc300-milan-A1/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost Sun Apr 18 21:45:09 2021
```

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7643 48-Core Processor
  2 "physical id"s (chips)
  192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 48
  siblings   : 96
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
  32 33 34 35 36 37 40 41 42 43 44 45 48 49 50 51 52 53 56 57 58 59 60 61
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
  32 33 34 35 36 37 40 41 42 43 44 45 48 49 50 51 52 53 56 57 58 59 60 61
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                192
On-line CPU(s) list:  0-191
Thread(s) per core:   2
Core(s) per socket:   48
Socket(s):             2
NUMA node(s):          16
Vendor ID:             AuthenticAMD
CPU family:            25
Model:                 1
Model name:            AMD EPYC 7643 48-Core Processor
Stepping:               1
CPU MHz:                3525.047
CPU max MHz:           2300.0000
CPU min MHz:           1500.0000
BogoMIPS:              4591.33
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:                512K
L3 cache:              32768K
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Platform Notes (Continued)

NUMA node0 CPU(s): 0-5,96-101
NUMA node1 CPU(s): 6-11,102-107
NUMA node2 CPU(s): 12-17,108-113
NUMA node3 CPU(s): 18-23,114-119
NUMA node4 CPU(s): 24-29,120-125
NUMA node5 CPU(s): 30-35,126-131
NUMA node6 CPU(s): 36-41,132-137
NUMA node7 CPU(s): 42-47,138-143
NUMA node8 CPU(s): 48-53,144-149
NUMA node9 CPU(s): 54-59,150-155
NUMA node10 CPU(s): 60-65,156-161
NUMA node11 CPU(s): 66-71,162-167
NUMA node12 CPU(s): 72-77,168-173
NUMA node13 CPU(s): 78-83,174-179
NUMA node14 CPU(s): 84-89,180-185
NUMA node15 CPU(s): 90-95,186-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf perf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrandlahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmlload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 4 5 96 97 98 99 100 101
node 0 size: 32065 MB
node 0 free: 31880 MB
node 1 cpus: 6 7 8 9 10 11 102 103 104 105 106 107
node 1 size: 32251 MB
node 1 free: 32098 MB
node 2 cpus: 12 13 14 15 16 17 108 109 110 111 112 113
node 2 size: 32253 MB
node 2 free: 32071 MB
node 3 cpus: 18 19 20 21 22 23 114 115 116 117 118 119
node 3 size: 32251 MB
node 3 free: 32075 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Platform Notes (Continued)

```
node 4 cpus: 24 25 26 27 28 29 120 121 122 123 124 125
node 4 size: 32253 MB
node 4 free: 31905 MB
node 5 cpus: 30 31 32 33 34 35 126 127 128 129 130 131
node 5 size: 32217 MB
node 5 free: 32042 MB
node 6 cpus: 36 37 38 39 40 41 132 133 134 135 136 137
node 6 size: 32253 MB
node 6 free: 32083 MB
node 7 cpus: 42 43 44 45 46 47 138 139 140 141 142 143
node 7 size: 32239 MB
node 7 free: 32079 MB
node 8 cpus: 48 49 50 51 52 53 144 145 146 147 148 149
node 8 size: 32253 MB
node 8 free: 32129 MB
node 9 cpus: 54 55 56 57 58 59 150 151 152 153 154 155
node 9 size: 32251 MB
node 9 free: 32139 MB
node 10 cpus: 60 61 62 63 64 65 156 157 158 159 160 161
node 10 size: 32253 MB
node 10 free: 32138 MB
node 11 cpus: 66 67 68 69 70 71 162 163 164 165 166 167
node 11 size: 32251 MB
node 11 free: 32137 MB
node 12 cpus: 72 73 74 75 76 77 168 169 170 171 172 173
node 12 size: 32253 MB
node 12 free: 32139 MB
node 13 cpus: 78 79 80 81 82 83 174 175 176 177 178 179
node 13 size: 32251 MB
node 13 free: 32129 MB
node 14 cpus: 84 85 86 87 88 89 180 181 182 183 184 185
node 14 size: 32253 MB
node 14 free: 32140 MB
node 15 cpus: 90 91 92 93 94 95 186 187 188 189 190 191
node 15 size: 32250 MB
node 15 free: 32140 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  0: 10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
  1: 11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
  2: 12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
  3: 12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
  4: 12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
  5: 12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
  6: 12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32
  7: 12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32
  8: 32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Platform Notes (Continued)

```

9: 32 32 32 32 32 32 32 32 11 10 12 12 12 12 12 12
10: 32 32 32 32 32 32 32 32 12 12 10 11 12 12 12 12
11: 32 32 32 32 32 32 32 32 12 12 11 10 12 12 12 12
12: 32 32 32 32 32 32 32 32 12 12 12 12 10 11 12 12
13: 32 32 32 32 32 32 32 32 12 12 12 12 11 10 12 12
14: 32 32 32 32 32 32 32 32 12 12 12 12 12 10 11 11
15: 32 32 32 32 32 32 32 32 12 12 12 12 12 11 10 10

```

From /proc/meminfo

```

MemTotal:      528177952 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

```

os-release:
  NAME="SLES"
  VERSION="15-SP2"
  VERSION_ID="15.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp2"

```

uname -a:

```

Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeба) x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Platform Notes (Continued)

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 Apr 18 21:43

SPEC is set to: /home/cpu2017-1.1.5-amd-aocc300-milan-A1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	889G	80G	810G	9%	/

From /sys/devices/virtual/dmi/id

Vendor:	Lenovo
Product:	ThinkSystem SR645 MB
Product Family:	ThinkSystem
Serial:	1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A4K40DB3-CWE	32 GB	2 rank	3200
16x Unknown	Unknown		

BIOS:

BIOS Vendor:	Lenovo
BIOS Version:	D8E115E-2.01
BIOS Date:	03/04/2021
BIOS Revision:	2.1
Firmware Revision:	3.1

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base, peak) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C | 502.gcc_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++ | 523.xalancbmk_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++ | 523.xalancbmk_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

Fortran | 548.exchange2_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm
-ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-fsto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -flang -lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

```
502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

```
505.mcf_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flio
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-lcim-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

```
502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32
```

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

```
523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-v1.2-Milan-E.html>
<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.30 GHz, AMD EPYC 7643

SPECrate®2017_int_base = 660

SPECrate®2017_int_peak = 689

CPU2017 License: 9017

Test Date: Apr-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-Milan-E.xml>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-04-18 09:45:08-0400.

Report generated on 2021-05-12 13:42:03 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-11.