



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro


A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

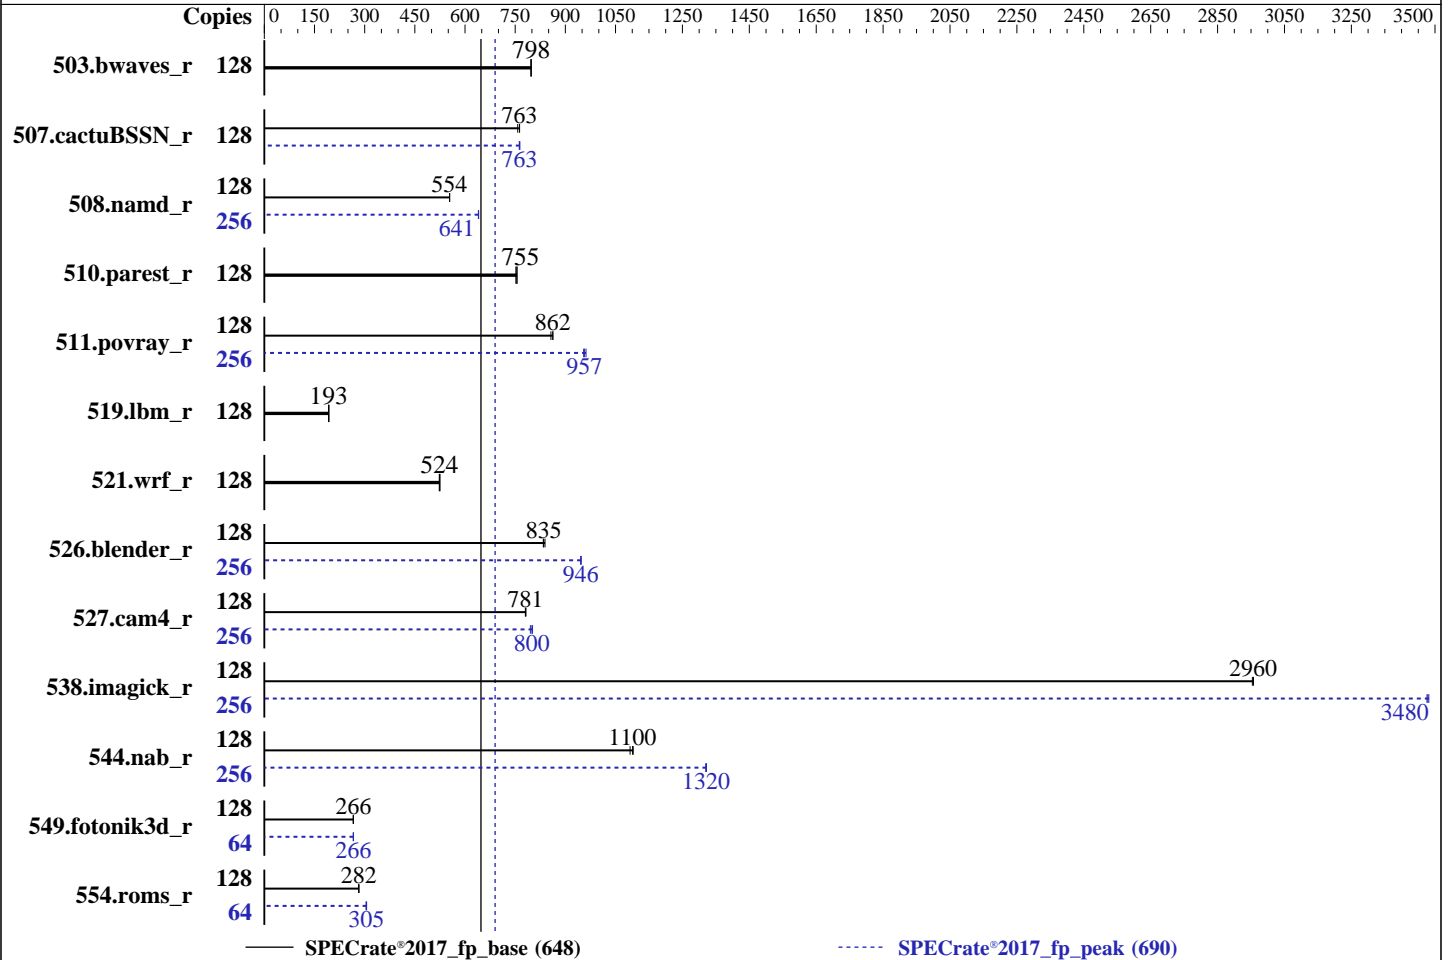

Hardware

CPU Name: AMD EPYC 7763
 Max MHz: 3500
 Nominal: 2450
 Enabled: 128 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)
 Storage: 1 x 200 GB SATA III SSD
 Other: None

Software

OS: Ubuntu 20.04.2 LTS
 Kernel 5.4.0-73-generic
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: No
 Firmware: Version 2.1 released May-2021
 File System: ext4
 System State: Run level 5 (multi-user with GUI)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1610	797	<u>1609</u>	<u>798</u>	1609	798	128	1610	797	<u>1609</u>	<u>798</u>	1609	798
507.cactuBSSN_r	128	214	758	212	763	<u>212</u>	<u>763</u>	128	<u>212</u>	<u>763</u>	213	762	212	764
508.namd_r	128	219	554	220	554	<u>220</u>	<u>554</u>	256	380	640	<u>380</u>	<u>641</u>	380	641
510.parest_r	128	443	756	445	752	<u>444</u>	<u>755</u>	128	443	756	445	752	<u>444</u>	<u>755</u>
511.povray_r	128	349	857	<u>347</u>	<u>862</u>	346	863	256	622	962	626	955	<u>624</u>	<u>957</u>
519.lbm_r	128	700	193	<u>701</u>	<u>193</u>	701	192	128	700	193	<u>701</u>	<u>193</u>	701	192
521.wrf_r	128	546	525	548	523	<u>547</u>	<u>524</u>	128	546	525	548	523	<u>547</u>	<u>524</u>
526.blender_r	128	232	839	234	834	<u>233</u>	<u>835</u>	256	412	946	<u>412</u>	<u>946</u>	412	947
527.cam4_r	128	286	782	287	780	<u>287</u>	<u>781</u>	256	<u>560</u>	<u>800</u>	558	802	563	795
538.imagick_r	128	<u>108</u>	<u>2960</u>	108	2950	108	2960	256	183	3480	183	3480	<u>183</u>	<u>3480</u>
544.nab_r	128	<u>196</u>	<u>1100</u>	197	1090	195	1100	256	326	1320	326	1320	<u>326</u>	<u>1320</u>
549.fotonik3d_r	128	<u>1874</u>	<u>266</u>	1874	266	1875	266	64	<u>937</u>	<u>266</u>	936	267	938	266
554.roms_r	128	<u>720</u>	<u>282</u>	719	283	721	282	64	<u>333</u>	<u>305</u>	333	306	334	304

SPECrate®2017_fp_base = **648**

SPECrate®2017_fp_peak = **690**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/root/spec-cpu2017/amd_rate_aocc300_milan_B_lib/lib;/root/spec-cpu2017/amd_rate_aocc300_milan_B_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 280
Package Power Limit Control = Manual
Package Power Limit = 280
APBDIS = 1
NUMA Nodes Per Socket = NPS4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Platform Notes (Continued)

Sysinfo program /root/spec-cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on mspecrunner Mon May 24 07:03:08 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7763 64-Core Processor
 2 "physical id"s (chips)
256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 256
On-line CPU(s) list: 0-255
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 2
NUMA node(s): 16
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7763 64-Core Processor
Stepping: 1
Frequency boost: enabled
CPU MHz: 3007.955
CPU max MHz: 2450.0000
CPU min MHz: 1500.0000
BogoMIPS: 4899.58
Virtualization: AMD-V
L1d cache: 4 MiB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Platform Notes (Continued)

```

L1i cache:                4 MiB
L2 cache:                  64 MiB
L3 cache:                  512 MiB
NUMA node0 CPU(s):        0-7,128-135
NUMA node1 CPU(s):        8-15,136-143
NUMA node2 CPU(s):        16-23,144-151
NUMA node3 CPU(s):        24-31,152-159
NUMA node4 CPU(s):        32-39,160-167
NUMA node5 CPU(s):        40-47,168-175
NUMA node6 CPU(s):        48-55,176-183
NUMA node7 CPU(s):        56-63,184-191
NUMA node8 CPU(s):        64-71,192-199
NUMA node9 CPU(s):        72-79,200-207
NUMA node10 CPU(s):       80-87,208-215
NUMA node11 CPU(s):       88-95,216-223
NUMA node12 CPU(s):       96-103,224-231
NUMA node13 CPU(s):       104-111,232-239
NUMA node14 CPU(s):       112-119,240-247
NUMA node15 CPU(s):       120-127,248-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:        Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected
Flags:                      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good noopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 4 5 6 7 128 129 130 131 132 133 134 135
node 0 size: 128887 MB
node 0 free: 128202 MB
node 1 cpus: 8 9 10 11 12 13 14 15 136 137 138 139 140 141 142 143
node 1 size: 129019 MB
node 1 free: 128389 MB
node 2 cpus: 16 17 18 19 20 21 22 23 144 145 146 147 148 149 150 151
node 2 size: 129020 MB
node 2 free: 128424 MB
node 3 cpus: 24 25 26 27 28 29 30 31 152 153 154 155 156 157 158 159
node 3 size: 129019 MB
node 3 free: 128325 MB
node 4 cpus: 32 33 34 35 36 37 38 39 160 161 162 163 164 165 166 167
node 4 size: 129020 MB
node 4 free: 128405 MB
node 5 cpus: 40 41 42 43 44 45 46 47 168 169 170 171 172 173 174 175
node 5 size: 128995 MB
node 5 free: 128431 MB
node 6 cpus: 48 49 50 51 52 53 54 55 176 177 178 179 180 181 182 183
node 6 size: 129020 MB
node 6 free: 128444 MB
node 7 cpus: 56 57 58 59 60 61 62 63 184 185 186 187 188 189 190 191
node 7 size: 129007 MB
node 7 free: 128354 MB
node 8 cpus: 64 65 66 67 68 69 70 71 192 193 194 195 196 197 198 199
node 8 size: 129020 MB
node 8 free: 128467 MB
node 9 cpus: 72 73 74 75 76 77 78 79 200 201 202 203 204 205 206 207
node 9 size: 129019 MB
node 9 free: 128475 MB
node 10 cpus: 80 81 82 83 84 85 86 87 208 209 210 211 212 213 214 215
node 10 size: 129020 MB
node 10 free: 128462 MB
node 11 cpus: 88 89 90 91 92 93 94 95 216 217 218 219 220 221 222 223
node 11 size: 129019 MB
node 11 free: 128470 MB
node 12 cpus: 96 97 98 99 100 101 102 103 224 225 226 227 228 229 230 231
node 12 size: 129020 MB
node 12 free: 128431 MB
node 13 cpus: 104 105 106 107 108 109 110 111 232 233 234 235 236 237 238 239
node 13 size: 129019 MB
node 13 free: 128472 MB
node 14 cpus: 112 113 114 115 116 117 118 119 240 241 242 243 244 245 246 247
node 14 size: 129020 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Platform Notes (Continued)

```

node 14 free: 128448 MB
node 15 cpus: 120 121 122 123 124 125 126 127 248 249 250 251 252 253 254 255
node 15 size: 129017 MB
node 15 free: 128446 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  11  12  12  12  12  12  12  12  32  32  32  32  32  32  32
  1:  11  10  12  12  12  12  12  12  12  32  32  32  32  32  32  32
  2:  12  12  10  11  12  12  12  12  12  32  32  32  32  32  32  32
  3:  12  12  11  10  12  12  12  12  12  32  32  32  32  32  32  32
  4:  12  12  12  12  10  11  12  12  12  32  32  32  32  32  32  32
  5:  12  12  12  12  11  10  12  12  12  32  32  32  32  32  32  32
  6:  12  12  12  12  12  12  10  11  12  32  32  32  32  32  32  32
  7:  12  12  12  12  12  12  11  10  12  32  32  32  32  32  32  32
  8:  32  32  32  32  32  32  32  32  10  11  12  12  12  12  12  12
  9:  32  32  32  32  32  32  32  32  11  10  12  12  12  12  12  12
 10:  32  32  32  32  32  32  32  32  12  12  10  11  12  12  12  12
 11:  32  32  32  32  32  32  32  32  12  12  11  10  12  12  12  12
 12:  32  32  32  32  32  32  32  32  12  12  12  12  10  11  12  12
 13:  32  32  32  32  32  32  32  32  12  12  12  12  11  10  12  12
 14:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
 15:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10

```

```

From /proc/meminfo
MemTotal:      2113684972 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Ubuntu 20.04.2 LTS

```

```

From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.2 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.2 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"

```

```

uname -a:
Linux mspecrunner 5.4.0-73-generic #82-Ubuntu SMP Wed Apr 14 17:39:42 UTC 2021 x86_64
x86_64 x86_64 GNU/Linux

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Platform Notes (Continued)

Kernel self-reported vulnerability status:

itlb_multihit:	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
srbds:	Not affected
tsx_async_abort:	Not affected

run-level 5 May 23 21:04

SPEC is set to: /root/spec-cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	196G	16G	171G	9%	/

From /sys/devices/virtual/dmi/id

```

BIOS:      American Megatrends Inc. 2.1 05/07/2021
Vendor:    Supermicro
Product:   Super Server
Serial:    0123456789

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

16x Micron Technology 72ASS16G72LZ-3G2B3 128 GB 4 rank 3200
16x NO DIMM Unknown

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Peak Optimization Flags (Continued)

544.nab_r (continued):

```
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang -lflangrti
```

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Peak Optimization Flags (Continued)

554.roms_r (continued):

-ljemalloc -lflang -lflangrti

Benchmarks using both Fortran and C:

521.wrf_r.basepeak = yes

527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -ffast-math
-funroll-loops -mllvm -extra-vectorizer-passes
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti

Benchmarks using both C and C++:

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc

Benchmarks using Fortran, C, and C++:

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2024US-TRT
(H12DSU-iN , AMD EPYC 7763)

SPECrate®2017_fp_base = 648

SPECrate®2017_fp_peak = 690

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2021
Hardware Availability: Mar-2021
Software Availability: Apr-2021

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Kieee -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2021-05-24 03:03:08-0400.

Report generated on 2021-06-08 20:09:03 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-08.