



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro


SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Gold 6330)

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

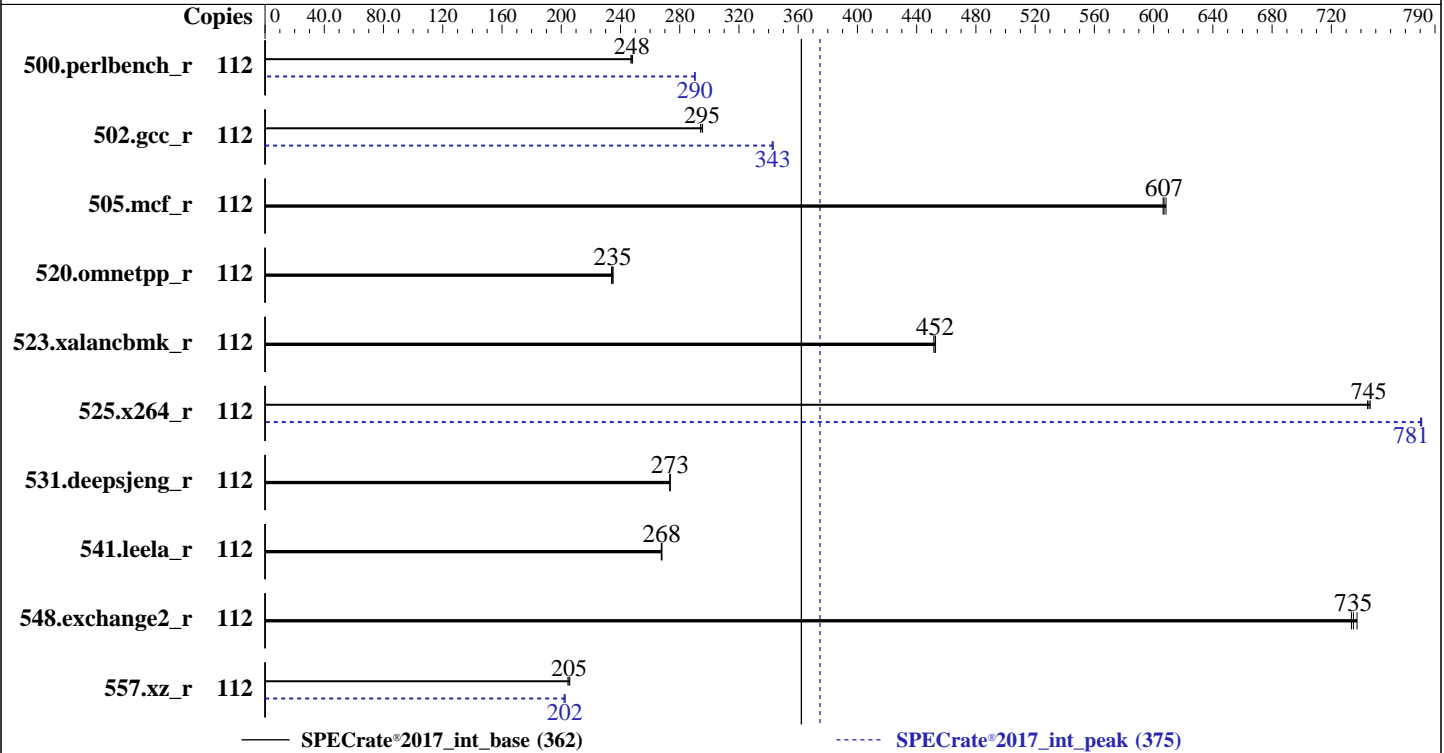

Hardware

CPU Name: Intel Xeon Gold 6330
 Max MHz: 3100
 Nominal: 2000
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 42 MB I+D on chip per chip
 Other: None
 Memory: 1 TB
 (16 x 64 GB 2Rx4 PC4-3200AA-R, running at 2933)
 Storage: 1 x 800 GB SATA III SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa)
 4.18.0-240.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++
 Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler
 Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler
 Classic Build 20201112 for Linux
 Parallel: No
 Firmware: Version 1.1 released Apr-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at
 the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Gold 6330)

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	720	248	722	247	719	248	112	615	290	614	290	614	290
502.gcc_r	112	537	295	537	295	539	294	112	463	342	462	343	462	343
505.mcf_r	112	298	608	298	607	298	606	112	298	608	298	607	298	606
520.omnetpp_r	112	626	235	628	234	625	235	112	626	235	628	234	625	235
523.xalancbmk_r	112	261	452	261	453	262	452	112	261	452	261	453	262	452
525.x264_r	112	263	746	263	745	263	744	112	251	781	251	781	251	780
531.deepsjeng_r	112	469	273	469	274	470	273	112	469	273	469	274	470	273
541.leela_r	112	693	268	693	268	692	268	112	693	268	693	268	692	268
548.exchange2_r	112	398	737	400	734	399	735	112	398	737	400	734	399	735
557.xz_r	112	591	204	588	206	589	205	112	597	202	599	202	597	203

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/root/cpu2017-1.1.7/lib/intel64:/root/cpu2017-1.1.7/lib/ia32:/root/cpu2017-1.1.7/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Gold 6330)

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

General Notes (Continued)

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance
SNC (Sub NUMA) = Enable
KTI Prefetch = Enable
LLC Dead Line Alloc = Disable

Sysinfo program /root/cpu2017-1.1.7/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on 182-104.hnet Mon Jul 12 15:49:45 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
 2 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 28
  siblings  : 56
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27
```

From lscpu:

Architecture: x86_64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Gold 6330)

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Platform Notes (Continued)

```

CPU op-mode(s):      32-bit, 64-bit
Byte Order:          Little Endian
CPU(s):              112
On-line CPU(s) list: 0-111
Thread(s) per core:  2
Core(s) per socket:  28
Socket(s):           2
NUMA node(s):        4
Vendor ID:           GenuineIntel
CPU family:          6
Model:               106
Model name:          Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
Stepping:            6
CPU MHz:             1681.825
CPU max MHz:         3100.0000
CPU min MHz:         800.0000
BogoMIPS:            4000.00
Virtualization:      VT-x
L1d cache:           48K
L1i cache:           32K
L2 cache:            1280K
L3 cache:            43008K
NUMA node0 CPU(s):  0-13,56-69
NUMA node1 CPU(s):  14-27,70-83
NUMA node2 CPU(s):  28-41,84-97
NUMA node3 CPU(s):  42-55,98-111
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid ept_ad fsrbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 43008 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 56 57 58 59 60 61 62 63 64 65 66 67 68 69

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Gold 6330)

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Platform Notes (Continued)

```

node 0 size: 251227 MB
node 0 free: 257146 MB
node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 1 size: 251695 MB
node 1 free: 257198 MB
node 2 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 84 85 86 87 88 89 90 91 92 93 94
95 96 97
node 2 size: 251813 MB
node 2 free: 257686 MB
node 3 cpus: 42 43 44 45 46 47 48 49 50 51 52 53 54 55 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 251336 MB
node 3 free: 257714 MB
node distances:
node  0  1  2  3
  0: 10 11 20 20
  1: 11 10 20 20
  2: 20 20 10 11
  3: 20 20 11 10

From /proc/meminfo
MemTotal:      1056434640 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/sbin/tuned-adm active
  Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Gold 6330)

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Platform Notes (Continued)

```
Linux 182-104.hnet 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jul 12 15:48

```
SPEC is set to: /root/cpu2017-1.1.7
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   739G  196G  544G  27% /
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Supermicro
Product:         SYS-620U-TNR
Product Family: Ultra
Serial:         0123456789
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 16x NO DIMM NO DIMM
 16x SK Hynix HMAA8GR7CJR4N-XN 64 GB 2 rank 3200, configured at 2933
```

```
BIOS:
 BIOS Vendor:    American Megatrends International, LLC.
 BIOS Version:   1.1
 BIOS Date:     04/21/2021
 BIOS Revision: 5.22
```

(End of data from sysinfo program)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Gold 6330)

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Compiler Version Notes

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Gold 6330)

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)
=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Gold 6330)

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Gold 6330)

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench_r: icc

557.xz_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -wl, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-mbranches-within-32B-boundaries
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Gold 6330)

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

502.gcc_r: -m32

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto  
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc32-5.0.1/lib -ljemallo
```

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto

```
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.2021-04-14.html>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.2021-04-14.xml>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Gold 6330)

SPECrate®2017_int_base = 362

SPECrate®2017_int_peak = 375

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.7 on 2021-07-12 18:49:45-0400.

Report generated on 2021-08-19 10:47:48 by CPU2017 PDF formatter v6442.

Originally published on 2021-08-17.