



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 434

### H3C UniServer R4300 G5 (Intel Xeon Platinum 8352V)

SPECrate®2017\_int\_peak = 452

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

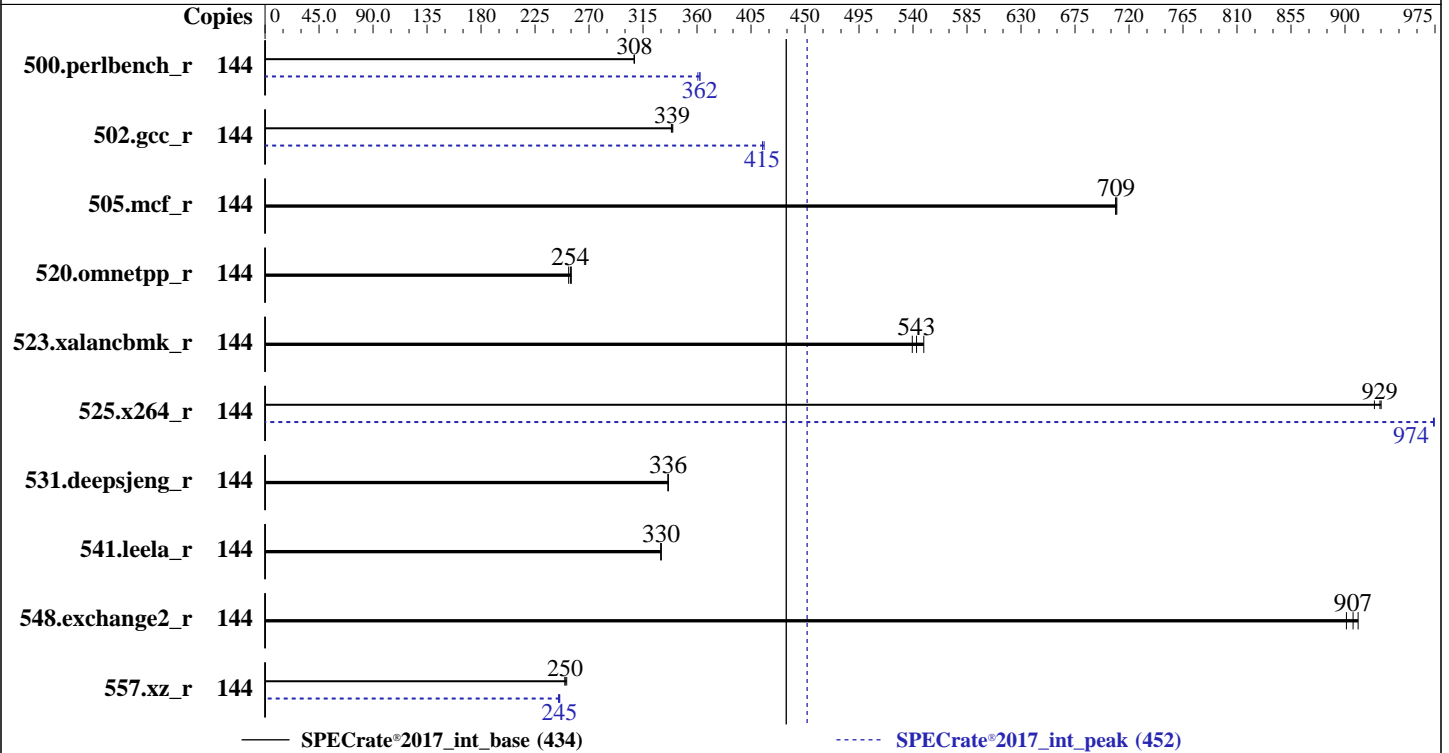

### Hardware

CPU Name: Intel Xeon Platinum 8352V  
 Max MHz: 3500  
 Nominal: 2100  
 Enabled: 72 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 54 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)  
 Storage: 1 x 480GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Version 5.39 released Nov-2021 BIOS  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 434

H3C UniServer R4300 G5 (Intel Xeon Platinum 8352V)

SPECrate®2017\_int\_peak = 452

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

## Results Table

| Benchmark       | Base   |            |            |            |            |            |            | Peak   |            |            |            |            |            |            |
|-----------------|--------|------------|------------|------------|------------|------------|------------|--------|------------|------------|------------|------------|------------|------------|
|                 | Copies | Seconds    | Ratio      | Seconds    | Ratio      | Seconds    | Ratio      | Copies | Seconds    | Ratio      | Seconds    | Ratio      | Seconds    | Ratio      |
| 500.perlbench_r | 144    | 745        | 308        | 745        | 308        | <b>745</b> | <b>308</b> | 144    | 633        | 362        | 636        | 361        | <b>633</b> | <b>362</b> |
| 502.gcc_r       | 144    | <b>601</b> | <b>339</b> | 602        | 339        | 600        | 340        | 144    | 492        | 415        | <b>492</b> | <b>415</b> | 490        | 416        |
| 505.mcf_r       | 144    | 328        | 709        | 328        | 710        | <b>328</b> | <b>709</b> | 144    | 328        | 709        | 328        | 710        | <b>328</b> | <b>709</b> |
| 520.omnetpp_r   | 144    | 740        | 255        | <b>742</b> | <b>254</b> | 747        | 253        | 144    | 740        | 255        | <b>742</b> | <b>254</b> | 747        | 253        |
| 523.xalancbmk_r | 144    | <b>280</b> | <b>543</b> | 277        | 549        | 282        | 539        | 144    | <b>280</b> | <b>543</b> | 277        | 549        | 282        | 539        |
| 525.x264_r      | 144    | 271        | 930        | <b>271</b> | <b>929</b> | 273        | 925        | 144    | <b>259</b> | <b>974</b> | 259        | 974        | 259        | 974        |
| 531.deepsjeng_r | 144    | 491        | 336        | 491        | 336        | <b>491</b> | <b>336</b> | 144    | 491        | 336        | 491        | 336        | <b>491</b> | <b>336</b> |
| 541.leela_r     | 144    | <b>722</b> | <b>330</b> | 722        | 330        | 723        | 330        | 144    | <b>722</b> | <b>330</b> | 722        | 330        | 723        | 330        |
| 548.exchange2_r | 144    | 419        | 901        | <b>416</b> | <b>907</b> | 414        | 911        | 144    | 419        | 901        | <b>416</b> | <b>907</b> | 414        | 911        |
| 557.xz_r        | 144    | 619        | 251        | 622        | 250        | <b>622</b> | <b>250</b> | 144    | 633        | 246        | <b>634</b> | <b>245</b> | 636        | 245        |

SPECrate®2017\_int\_base = 434

SPECrate®2017\_int\_peak = 452

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 434

H3C UniServer R4300 G5 (Intel Xeon Platinum 8352V)

SPECrate®2017\_int\_peak = 452

**CPU2017 License:** 9066

**Test Sponsor:** New H3C Technologies Co., Ltd.

**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Dec-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Dec-2020

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Set SNC (Sub NUMA) to Enabled

Set Power Performance Tuning to BIOS Controls EPB

Set Energy Performance BIAS to Performance

Set XPT Prefetch to Enabled

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Thu Dec 2 15:49:36 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8352V CPU @ 2.10GHz
```

```
2 "physical id"s (chips)
```

```
144 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 36
```

```
siblings : 72
```

```
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35
```

```
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35
```

From lscpu from util-linux 2.32.1:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 144

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 434

H3C UniServer R4300 G5 (Intel Xeon Platinum 8352V)

SPECrate®2017\_int\_peak = 452

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

## Platform Notes (Continued)

```

On-line CPU(s) list: 0-143
Thread(s) per core: 2
Core(s) per socket: 36
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Platinum 8352V CPU @ 2.10GHz
Stepping: 6
CPU MHz: 2500.000
CPU max MHz: 3500.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 55296K
NUMA node0 CPU(s): 0-17,72-89
NUMA node1 CPU(s): 18-35,90-107
NUMA node2 CPU(s): 36-53,108-125
NUMA node3 CPU(s): 54-71,126-143
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 55296 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

```

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 72 73 74 75 76 77 78 79 80 81
82 83 84 85 86 87 88 89

```

node 0 size: 128350 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 434

H3C UniServer R4300 G5 (Intel Xeon Platinum 8352V)

SPECrate®2017\_int\_peak = 452

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

## Platform Notes (Continued)

```

node 0 free: 127910 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 90 91 92 93 94 95 96
97 98 99 100 101 102 103 104 105 106 107
node 1 size: 128988 MB
node 1 free: 128789 MB
node 2 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 108 109 110 111 112
113 114 115 116 117 118 119 120 121 122 123 124 125
node 2 size: 129016 MB
node 2 free: 128234 MB
node 3 cpus: 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 126 127 128 129 130
131 132 133 134 135 136 137 138 139 140 141 142 143
node 3 size: 129011 MB
node 3 free: 128813 MB
node distances:
node  0  1  2  3
  0: 10 11 20 20
  1: 11 10 20 20
  2: 20 20 10 11
  3: 20 20 11 10

```

From /proc/meminfo

```

MemTotal:      527735672 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sbin/tuned-adm active

Current active profile: throughput-performance

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

```

uname -a:

Linux localhost.localdomain 4.18.0-193.el8.x86\_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 434

H3C UniServer R4300 G5 (Intel Xeon Platinum 8352V)

SPECrate®2017\_int\_peak = 452

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

## Platform Notes (Continued)

x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

|  |  |
|--|--|
| CVE-2018-12207 (iTLB Multihit):                        | Not affected   |
| CVE-2018-3620 (L1 Terminal Fault):                     | Not affected   |
| Microarchitectural Data Sampling:                      | Not affected   |
| CVE-2017-5754 (Meltdown):                              | Not affected   |
| CVE-2018-3639 (Speculative Store Bypass):              | Mitigation: Speculative Store Bypass disabled via prctl and seccomp  |
| CVE-2017-5753 (Spectre variant 1):                     | Mitigation: usercopy/swapgs barriers and __user pointer sanitization |
| CVE-2017-5715 (Spectre variant 2):                     | Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling            |
| CVE-2020-0543 (Special Register Buffer Data Sampling): | No status reported   |
| CVE-2019-11135 (TSX Asynchronous Abort):               | Not affected   |

run-level 3 Dec 2 15:26

SPEC is set to: /home/speccpu

| Filesystem            | Type | Size | Used | Avail | Use% | Mounted on |
|-----------------------|------|------|------|-------|------|------------|
| /dev/mapper/rhel-home | xfs  | 392G | 121G | 272G  | 31%  | /home      |

From /sys/devices/virtual/dmi/id  
Product Family: Rack

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

1x <BAD INDEX> <BAD INDEX> 32 GB 2 rank 3200, configured at 2933
15x Hynix HMA84GR7DJR4N-XN 32 GB 2 rank 3200, configured at 2933
16x NO DIMM NO DIMM

```

BIOS:

```

BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     5.39
BIOS Date:        11/17/2021
BIOS Revision:    5.22

```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 434

H3C UniServer R4300 G5 (Intel Xeon Platinum 8352V)

SPECrate®2017\_int\_peak = 452

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

## Compiler Version Notes

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 434

H3C UniServer R4300 G5 (Intel Xeon Platinum 8352V)

SPECrate®2017\_int\_peak = 452

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Fortran | 548.exchange2\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 434

H3C UniServer R4300 G5 (Intel Xeon Platinum 8352V)

SPECrate®2017\_int\_peak = 452

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 434

H3C UniServer R4300 G5 (Intel Xeon Platinum 8352V)

SPECrate®2017\_int\_peak = 452

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench\_r: icc

557.xz\_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -wl, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2)

-xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4 -fno-strict-overflow

-mbranches-within-32B-boundaries

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 434

H3C UniServer R4300 G5 (Intel Xeon Platinum 8352V)

SPECrate®2017\_int\_peak = 452

CPU2017 License: 9066

Test Date: Dec-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2021

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2020

## Peak Optimization Flags (Continued)

500.perlbench\_r (continued):

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

502.gcc\_r: -m32

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto  
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc32-5.0.1/lib -ljemallo
```

505.mcf\_r: basepeak = yes

525.x264\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto

```
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

557.xz\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-CPX-RevD.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-CPX-RevD.html)

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-CPX-RevD.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-CPX-RevD.xml)



# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate<sup>®</sup>2017\_int\_base = 434

H3C UniServer R4300 G5 (Intel Xeon Platinum 8352V)

SPECrate<sup>®</sup>2017\_int\_peak = 452

**CPU2017 License:** 9066

**Test Sponsor:** New H3C Technologies Co., Ltd.

**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Dec-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Dec-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.8 on 2021-12-02 02:49:35-0500.

Report generated on 2021-12-22 12:27:20 by CPU2017 PDF formatter v6442.

Originally published on 2021-12-21.