



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 207

PowerEdge R550 (Intel Xeon Gold 5317, 3.00 GHz)

SPECrate®2017\_int\_peak = 213

CPU2017 License: 55


Test Date: Apr-2022

Test Sponsor: Dell Inc.

Hardware Availability: May-2021

Tested by: Dell Inc.

Software Availability: Dec-2021

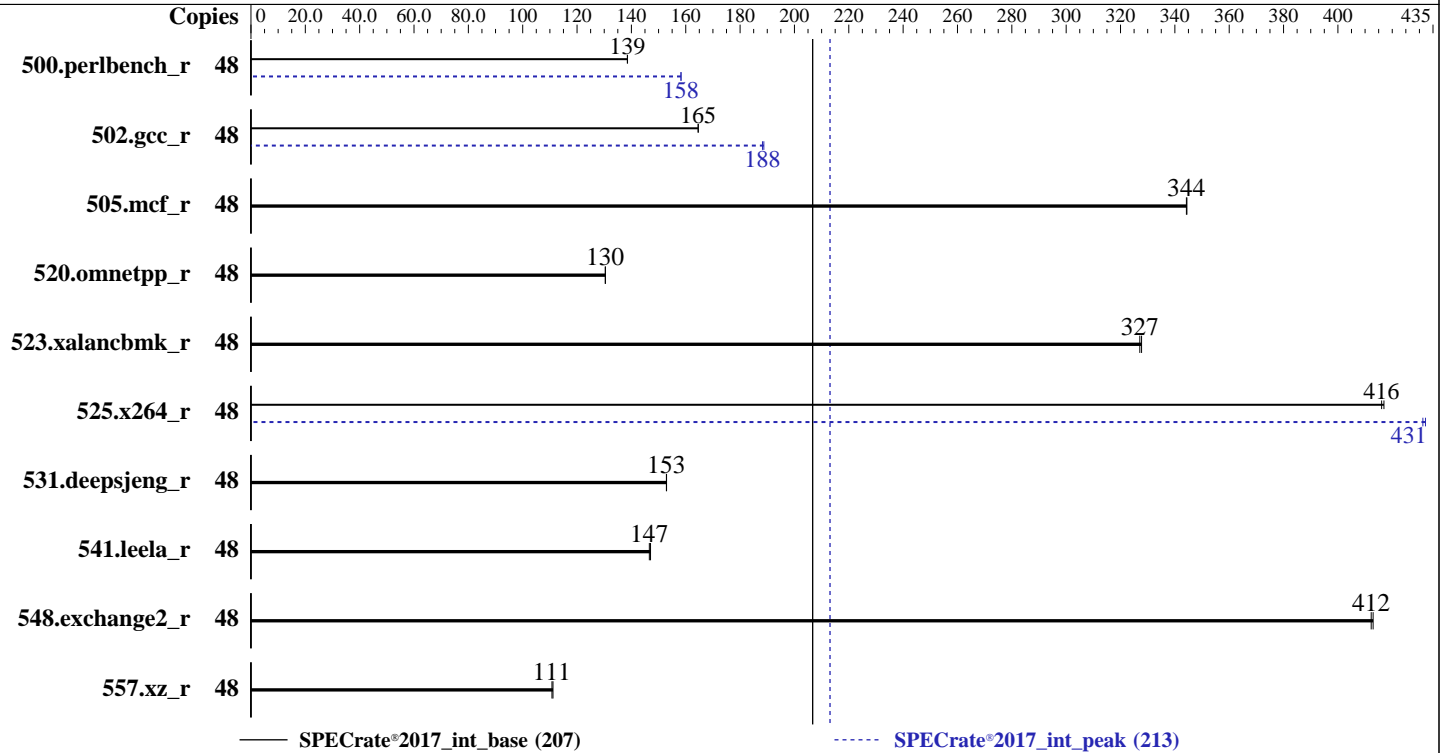

### Hardware

CPU Name: Intel Xeon Gold 5317  
 Max MHz: 3600  
 Nominal: 3000  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 18 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R, running at 2933)  
 Storage: 125 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.4 (Ootpa)  
 4.18.0-305.el8.x86\_64  
 Compiler: C/C++: Version 2022.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2021.5 of Intel Fortran Compiler Classic for Linux;  
 C/C++: Version 2021.5 of Intel C/C++ Compiler Classic for Linux  
 Parallel: No  
 Firmware: Version 1.5.4 released Dec-2021  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 207

PowerEdge R550 (Intel Xeon Gold 5317, 3.00 GHz)

SPECrate®2017\_int\_peak = 213

CPU2017 License: 55

Test Date: Apr-2022

Test Sponsor: Dell Inc.

Hardware Availability: May-2021

Tested by: Dell Inc.

Software Availability: Dec-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	551	139	<b><u>552</u></b>	<b><u>139</u></b>			48	<b><u>483</u></b>	<b><u>158</u></b>	483	158		
502.gcc_r	48	413	165	<b><u>413</u></b>	<b><u>165</u></b>			48	<b><u>361</u></b>	<b><u>188</u></b>	360	189		
505.mcf_r	48	225	344	<b><u>225</u></b>	<b><u>344</u></b>			48	225	344	<b><u>225</u></b>	<b><u>344</u></b>		
520.omnetpp_r	48	<b><u>483</u></b>	<b><u>130</u></b>	483	130			48	<b><u>483</u></b>	<b><u>130</u></b>	483	130		
523.xalancbmk_r	48	155	328	<b><u>155</u></b>	<b><u>327</u></b>			48	155	328	<b><u>155</u></b>	<b><u>327</u></b>		
525.x264_r	48	202	417	<b><u>202</u></b>	<b><u>416</u></b>			48	194	432	<b><u>195</u></b>	<b><u>431</u></b>		
531.deepsjeng_r	48	360	153	<b><u>360</u></b>	<b><u>153</u></b>			48	360	153	<b><u>360</u></b>	<b><u>153</u></b>		
541.leela_r	48	541	147	<b><u>542</u></b>	<b><u>147</u></b>			48	541	147	<b><u>542</u></b>	<b><u>147</u></b>		
548.exchange2_r	48	<b><u>305</u></b>	<b><u>412</u></b>	305	413			48	<b><u>305</u></b>	<b><u>412</u></b>	305	413		
557.xz_r	48	<b><u>468</u></b>	<b><u>111</u></b>	466	111			48	<b><u>468</u></b>	<b><u>111</u></b>	466	111		

SPECrate®2017\_int\_base = 207

SPECrate®2017\_int\_peak = 213

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.8-ic2022.0-DL/lib/intel64:/mnt/ramdisk/cpu2017-1.1.8-ic2022.0-DL/lib/ia32:/mnt/ramdisk/cpu2017-1.1.8-ic2022.0-DL/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 207

PowerEdge R550 (Intel Xeon Gold 5317, 3.00 GHz)

SPECrate®2017\_int\_peak = 213

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
 memory using Red Hat Enterprise Linux 8.4  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
 sync; echo 3> /proc/sys/vm/drop\_caches  
 runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

Sub NUMA Cluster : 2-Way Clustering  
 Virtualization Technology : Disabled

System Profile : Custom  
 CPU Power Management : Maximum Performance  
 C1E : Disabled  
 C States : Autonomous  
 Memory Patrol Scrub : Disabled  
 Energy Efficiency Policy : Performance  
 CPU Interconnect Bus Link  
 Power Management : Disabled  
 PCI ASPM L1 Link  
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2022.0-DL/bin/sysinfo  
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
 running on localhost.localdomain Wed Apr 13 11:44:10 2022

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5317 CPU @ 3.00GHz  
 2 "physical id"s (chips)  
 48 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 12  
 siblings : 24  
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11  
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11

From lscpu from util-linux 2.32.1:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 207

PowerEdge R550 (Intel Xeon Gold 5317, 3.00 GHz)

SPECrate®2017\_int\_peak = 213

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 48
On-line CPU(s) list:   0-47
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel
CPU family:             6
Model:                  106
Model name:             Intel(R) Xeon(R) Gold 5317 CPU @ 3.00GHz
BIOS Model name:       Intel(R) Xeon(R) Gold 5317 CPU @ 3.00GHz
Stepping:               6
CPU MHz:                3405.953
BogoMIPS:               6000.00
Virtualization:        VT-x
L1d cache:              48K
L1i cache:              32K
L2 cache:               1280K
L3 cache:               18432K
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s):     2,6,10,14,18,22,26,30,34,38,42,46
NUMA node2 CPU(s):     1,5,9,13,17,21,25,29,33,37,41,45
NUMA node3 CPU(s):     3,7,11,15,19,23,27,31,35,39,43,47
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd
dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig
flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 18432 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44
node 0 size: 128121 MB
node 0 free: 125509 MB
node 1 cpus: 2 6 10 14 18 22 26 30 34 38 42 46
node 1 size: 129021 MB
node 1 free: 123372 MB
node 2 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 2 size: 129021 MB
node 2 free: 128557 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 129018 MB
node 3 free: 128763 MB
node distances:

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 207

PowerEdge R550 (Intel Xeon Gold 5317, 3.00 GHz)

SPECrate®2017\_int\_peak = 213

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2022  
Hardware Availability: May-2021  
Software Availability: Dec-2021

## Platform Notes (Continued)

```
node 0 1 2 3
0: 10 11 20 20
1: 11 10 20 20
2: 20 20 10 11
3: 20 20 11 10
```

```
From /proc/meminfo
MemTotal: 527547252 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/sbin/tuned-adm active
Current active profile: throughput-performance
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.4 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.4"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit): Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swappgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected
```

```
run-level 3 Apr 13 11:32
```

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2022.0-DL
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 125G 3.7G 122G 3% /mnt/ramdisk
```

```
From /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R550
Product Family: PowerEdge
Serial: 5GCVNK3
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 207

PowerEdge R550 (Intel Xeon Gold 5317, 3.00 GHz)

SPECrate®2017\_int\_peak = 213

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 002C00B3002C 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor: Dell Inc.

BIOS Version: 1.5.4

BIOS Date: 12/17/2021

BIOS Revision: 1.5

(End of data from sysinfo program)

## Compiler Version Notes

C | 500.perlbench\_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.5.0 Build 20211109\_000000  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.0.0 Build 20211123  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.0.0 Build 20211123  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.5.0 Build 20211109\_000000  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.0.0 Build 20211123  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak) 557.xz\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 207

PowerEdge R550 (Intel Xeon Gold 5317, 3.00 GHz)

SPECrate®2017\_int\_peak = 213

CPU2017 License: 55

Test Date: Apr-2022

Test Sponsor: Dell Inc.

Hardware Availability: May-2021

Tested by: Dell Inc.

Software Availability: Dec-2021

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.0.0 Build 20211123  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.5.0 Build 20211109\_000000  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.0.0 Build 20211123  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.0.0 Build 20211123  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.0.0 Build 20211123  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Fortran | 548.exchange2\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.5.0  
Build 20211109\_000000  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 207

PowerEdge R550 (Intel Xeon Gold 5317, 3.00 GHz)

SPECrate®2017\_int\_peak = 213

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2022.0.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2022.0.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2022.0.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench\_r: icc

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 207

PowerEdge R550 (Intel Xeon Gold 5317, 3.00 GHz)

SPECrate®2017\_int\_peak = 213

CPU2017 License: 55

Test Date: Apr-2022

Test Sponsor: Dell Inc.

Hardware Availability: May-2021

Tested by: Dell Inc.

Software Availability: Dec-2021

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2022.0.1/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2022.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 207

PowerEdge R550 (Intel Xeon Gold 5317, 3.00 GHz)

SPECrate®2017\_int\_peak = 213

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2022

Hardware Availability: May-2021

Software Availability: Dec-2021

## Peak Optimization Flags (Continued)

525.x264\_r (continued):

```
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2022.0.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Dell-ic2022-linux64-v1.0.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Dell-ic2022-linux64-v1.0.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.5.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-04-13 12:44:09-0400.

Report generated on 2024-01-29 17:05:21 by CPU2017 PDF formatter v6716.

Originally published on 2022-06-07.